
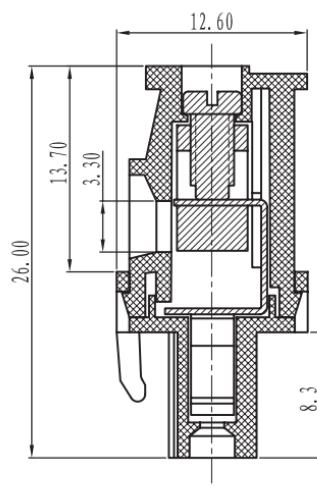
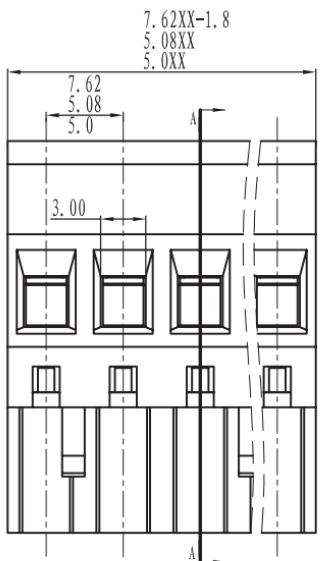


**Datasheet****ENGLISH****New 5.0mm Plug Straight 15A 10 way**

RS Stock 874-4802

**Dimensions: (mm)**

SECTION A-A

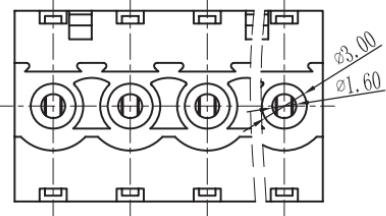



ENGLISH

## Specifications

### Electrical

Standard: UL IEC

Rated voltage: 300V 320V

Rated current: 15A 20A

Contact resistance: 20mΩ

Wire range: 28-14AWG 2.5mm<sup>2</sup>

Withstanding voltage: AC2000V/1Min

Insulation resistance: 500MΩ/DC500V

### Mechanical

Temp. Range: -40° C ~ +105° C

Torque: 0.5Nm (4.5lb`in)

Strip length: 7-8mm

### Dimensions

Pitch: 5.0mm, 5.08mm, 7.62mm

Poles: 02P-24P

### Material

Housing: PA66, UL94V-0

Screws: M3, steel Zinc plated

Clamp: Brass, Ni plated

Wire guard: Phosphor bronze, Ni plated