


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [87631-2023](#)  
**Status:** **Active**  
**Overview:** EXTreme PowerPlus™ (SSI)  
**Description:** 6.35mm Pitch Power, 3.18mm, 2.54mm Pitch Signal, EXTreme PowerPlus™ P-S-P Header, Through Hole, Right Angle, Long Contacts, 30 Circuits, Power Alpha 3, Signal 24, Power Beta 3, Recessed Signal Pins B3, D6, Lead-Free

**Documents:**

[3D Model](#) [Application Specification AS-87631-018 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-87631-006 \(PDF\)](#)

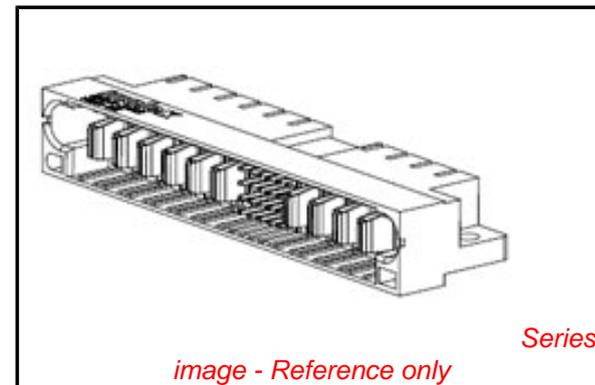

**Agency Certification**

CSA LR19980  
TUV R50078473

**General**

Product Family PCB Headers  
Series [87631](#)  
Application Board-to-Board, Power  
Comments <LI>Long Contacts|<LI>Recessed Signal Pins: B3, D6  
Overview [EXTreme PowerPlus™ \(SSI\)](#)  
Product Name EXTreme PowerPlus™  
UPC 822350395205

**Physical**

(p)ower-(s)ignal Configuration 3p - 24s - 3p  
Breakaway No  
Circuits (Loaded) 30  
Circuits (maximum) 30  
Color - Resin Black  
Durability (mating cycles max) 100  
First Mate / Last Break Yes  
Flammability 94V-0  
Glow-Wire Compliant No  
Guide to Mating Part Yes  
Keying to Mating Part Yes  
Lock to Mating Part Yes  
Material - Metal Copper Alloy  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
Net Weight 23.775/g  
Number of Rows 4  
Orientation Right Angle  
PC Tail Length 3.43mm  
PCB Locator Yes  
PCB Retention Yes  
PCB Thickness - Recommended 1.57mm  
Packaging Type Tray  
Pitch - Mating Interface 2.54mm, 3.18mm, 6.35mm  
Plating min - Mating 0.762µm  
Plating min - Termination 2.540µm  
Polarized to Mating Part Yes  
Polarized to PCB Yes  
Shrouded Fully

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Low-Halogen Status Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[87631Series](#)

**Mates With**

[87633 Vertical Press-Fit Receptacle](#), [87622 Vertical Through Hole Receptacle](#), [87632 Right Angle Through Hole Receptacle](#)

Stackable	No
Temperature Range - Operating	-20°C to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	2.5A, 30A, 50A
Voltage - Maximum	250V DC

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-87631-018
Product Specification	PS-87631-006
Sales Drawing	SD-87631-014

This document was generated on 10/19/2012

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**