
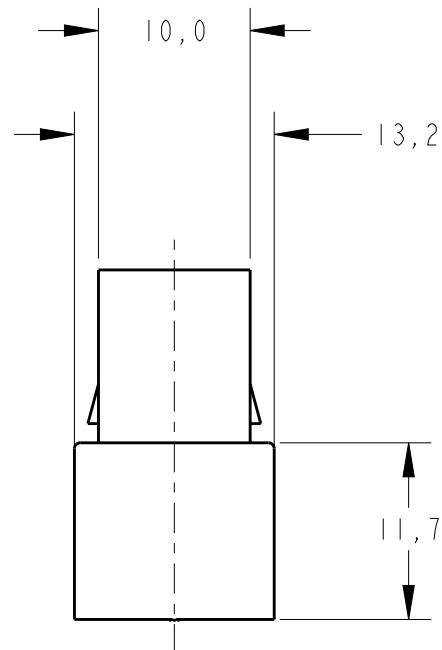

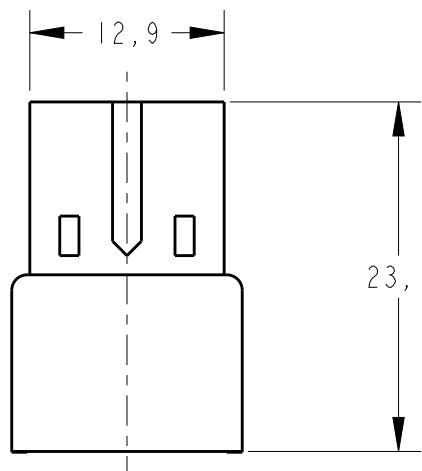


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REV.BY ECO16-006304	29APR2016	HC	WLS



△1-HEAT STABILIZED

△2-PA 6.6 ACC. TO SPEC. IEC 60335-1
GWT 750C WITHOUT FLAME.

OBSOLETE


NATURAL	PA 6.6 △2	881600-5
BLACK	PA 6.6 △1	881600-4
BLACK	PA 6.6	881600-3
RED	PA 6.6	881600-2
NATURAL	PA 6.6	881600-1
FINISH	MATERIAL	PART NUMBER

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±0,4
2 PLC	±-
3 PLC	±-
4 PLC	±-
ANGLES	±-



DWN 28APR2016

H.C.CANTERI

CHK 29APR2016

W.L.STEFANI

APVD -

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

MATERIAL -

FINISH -



TE Connectivity

NAME 2 WAY FASTIN-ON REC.HSG. .250 SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	-	C-881600	-

CUSTOMER DRAWING

SCALE 2:1

SHEET 1 OF 1

REV A2

20

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY -

COPYRIGHT 20

THIS DRAWING IS UNPUBLISHED.