



Top 2000 6 s 12 mm Part number 88226011



Relay output

- Mono-voltage
- 1 timed changeover and 1 instantaneous contact
- Elapsed time can be saved mechanically in the event of a break in supply
- Progress of cycle displayed
- Housing 48 x 48 mm
- Connection by screw-terminal base or 8-pin base

Part numbers


	Type	Functions	Relay outputs	Delay	Voltages
88 226 013	6 s 12 mm	Multi-function 2 - 3 - 4	1 time changeover 5 A 1 instantaneous	12 min : - Max. timing 6 s - 60 s - 12 min- Dial graduation 0.1 s - 1 s - 12 s	24 V AC
88 226 019	6 s 12 mm -	-	-	-	42 1\ 48 V AC
88 226 012	6 s 12 mm -	-	-	-	110 1\ 127 V AC
88 226 011	6 s 12 mm -	-	-	-	220 1\ 240 V AC
88 226 501	6 s 12 mm -	-	-	-	24 V AC
88 226 502	6 s 12 mm -	-	-	-	42 1\ 48 V AC
88 226 503	6 s 12 mm -	-	-	-	110 1\ 127 V AC
88 226 504	6 s 12 mm -	-	-	-	220 1\ 240 V
88 226 016	6 min 12 h	Multi-function 2 - 3 - 4	1 timed changeover 5 A1 instantaneous	12 min : - Max. timing 6 s - 60 s - 12 min- Dial graduation 0.1 s - 1 s - 12 s	24 V AC - 50 Hz
88 226 505	6 min 12 h -	-	-	-	24 VAC- 50 Hz
88 226 017	6 min 12 h -	-	-	-	42 to 48 V AC - 50 Hz
88 226 506	6 min 12 h -	-	-	-	42 →48 VAC- 50 Hz
88 226 015	6 min 12 h -	-	-	-	110 to 127 V AC - 50 Hz
88 226 507	6 min 12 h -	-	-	-	110 →127 VAC- 50 Hz
88 226 014	6 min 12 h -	-	-	-	220 to 240 V AC - 50 Hz
88 226 508	6 min 12 h -	-	-	-	220 →240 VAC- 50 Hz

Specifications

Precision limit error	
Repetition accuracy	± 1.5 % (± 4 %/6 s)
Selection precision	See "timing ranges" table for scale graduation
Reset time	0.20 s
Timed two-pole	
Instantaneous single pole	1
Thermal rating	6,3 A
Rating (cos φ = 0.41) 10 ⁴ operations	5 A - 230 V
Absorbed power-motor	
Voltage variation at maximum temperature of 55 °C according to IEC 255 100	24 V +10 % - 42 V -15 % 48 V +10 % - 110 V -20 % 127 V 0 % - 220 V -20 % 240 V 0 %
Operator factor	100 %
Temperature limits use (°C)	-10→+55
Temperature limits stored (°C)	-20→70
Environmental protection Tropicalised to IEC 68-2-10	■
Vibration withstand on 3 axes (Veritas standard)	4 G - 55 Hz
Dielectric test voltage according to IEC 255 5 or VDE 0435	1000 V - Un ≤ 60 V 2000 V - Un > 60 V
Insulation according to standard VDE 0110 group C	380 V AC - 440 V DC
Protection Housing	IP 40
Degree of terminal protection	IP 10
Conformity to standards NFC 45250 - VDE 0110 - 0435 - 0660 or ICE 529	■
Connection : Screw/saddle	■
Terminal capacity Single-wire 1 or 2 leads Multi-wire	0,75 - 2,5 mm ²
Terminal capacity Multi-wire 1 or 2 leads	0,5 - 1 mm ²
Mounting : Base mounting on 8-pin socket	■
Weight (g)	185

Dimensions (mm)


88 226 0

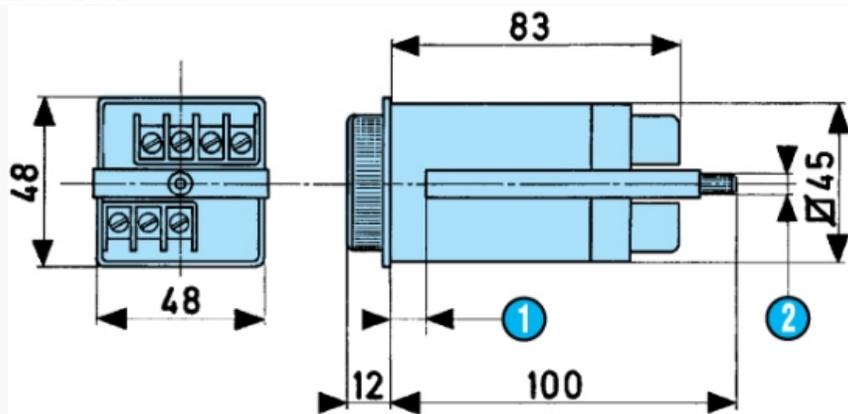

N°	Legend
①	Panel depth 10 mm max.
②	M3 screw

Dimensions (mm)


88 226 5

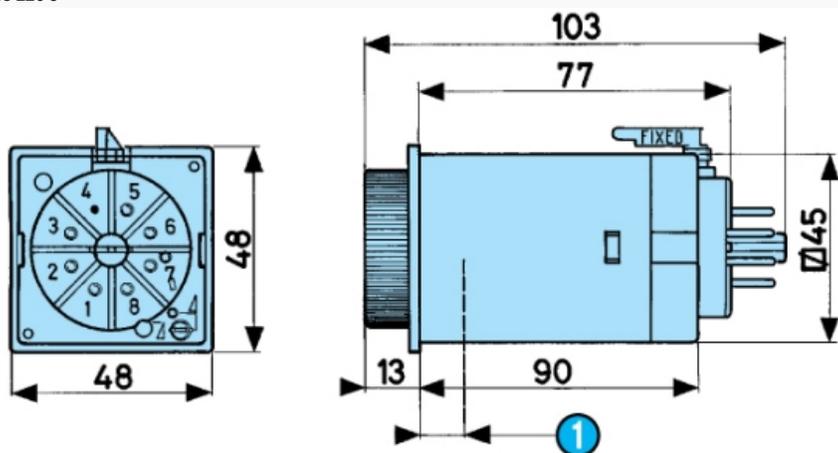

N°	Legend
①	Panel depth 10 mm max.


Dimensions (mm)

Panel cut-out

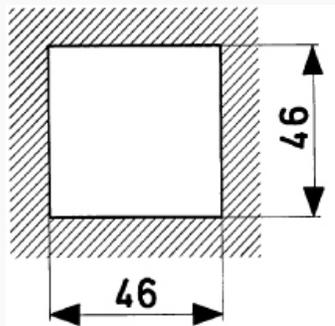


Dimensions (mm)

Solder tag connector
25 622 301 - 8-pin

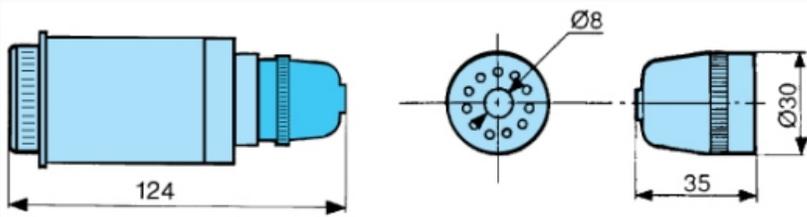

Dimensions (mm)

Inverter for DC supply
 84 861 501 : 24 • 48 V DC
 84 861 503 : 110 • 127 V DC
 Weight 150 g

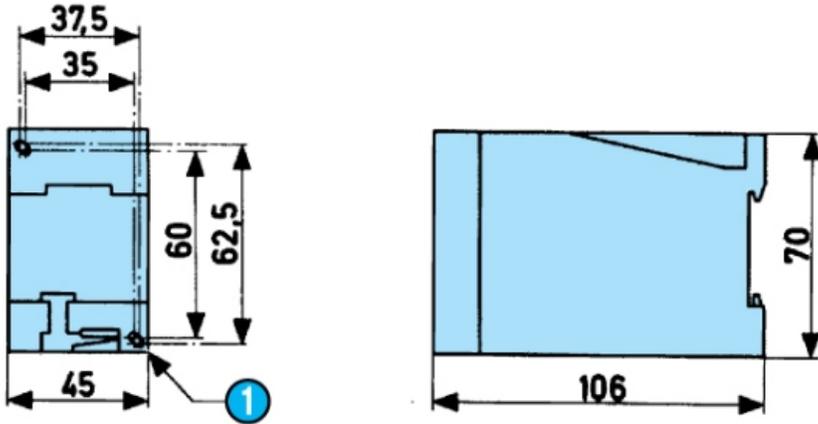


[48 V DC](#)
[84 861 503 : 110 • 127 V DC](#)
[Weight 150 g" class="link_produits.thickbox"> Zoom](#)

N°	Legend
1	Fixing holes ø 5


Dimensions (mm)

Screw terminal or connector socket
 26 622 128 - 8-pin

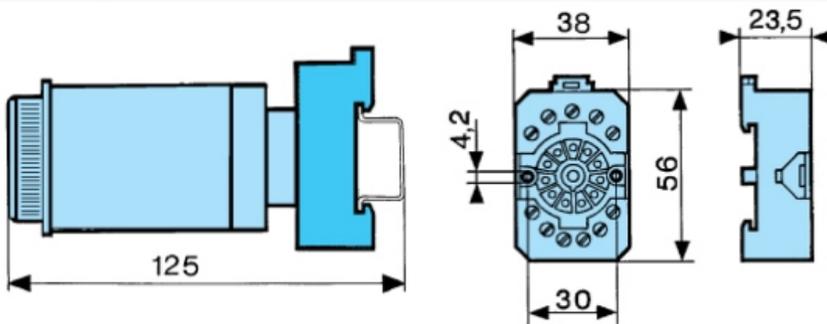

Curves


Function 2

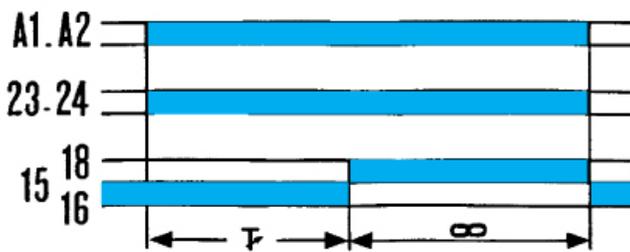

Function
 *** TRADUCTION MANQUANTE ***

Curves


Function 3

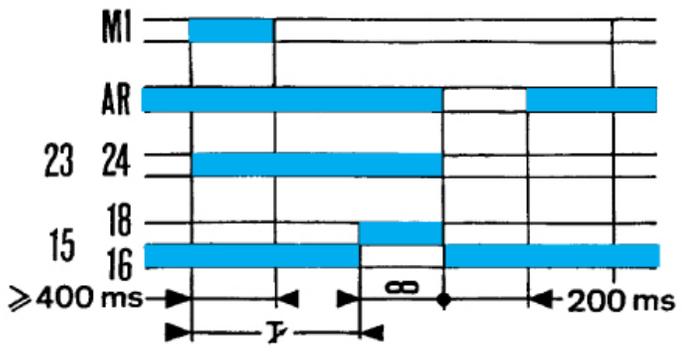

Function
 *** TRADUCTION MANQUANTE ***

Curves


Function 4

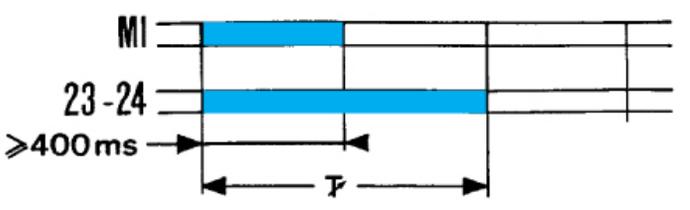

Function
 *** TRADUCTION MANQUANTE ***


Connections

Function 2

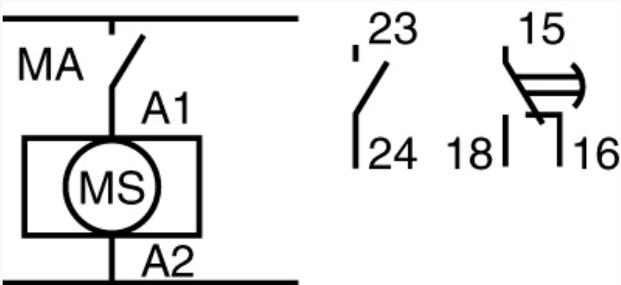


Connections

Function 3

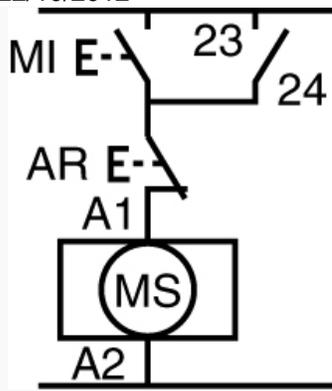

Connections


Function 4

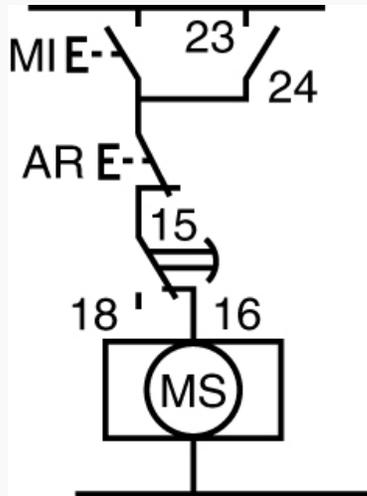

Function 4 : On energisation, chance of contact bounce on instantaneous contact for 250 ms

Connections


Internal layout 88 226 0

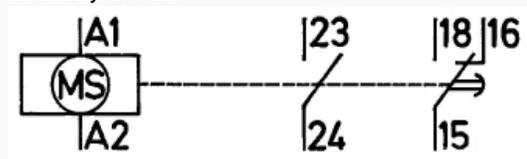

Function 4 : On energisation, chance of contact bounce on instantaneous contact for 250 ms

Connections

Terminal identification 88 226 0

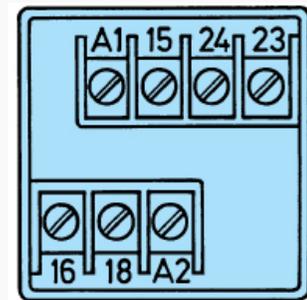


Function 4 : On energisation, chance of contact bounce on instantaneous contact for 250 ms

N°	Legend
	Supply

<input checked="" type="checkbox"/>	Timed contact
<input checked="" type="checkbox"/>	Instantaneous contact

Connections


Internal layout 88 226 5

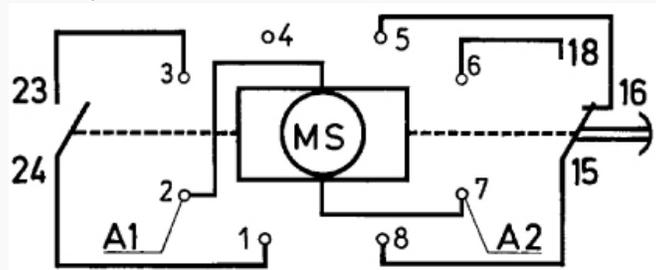

Function 4 : On energisation, chance of contact bounce on instantaneous contact for 250 ms

Connections

Terminal identification 88 226 5

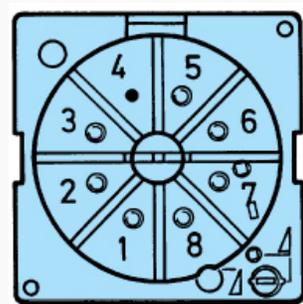

Function 4 : On energisation, chance of contact bounce on instantaneous contact for 250 ms

N° 2-3	Legend
<input checked="" type="checkbox"/>	Supply
<input checked="" type="checkbox"/>	Timed contact
<input checked="" type="checkbox"/>	Instantaneous contact