
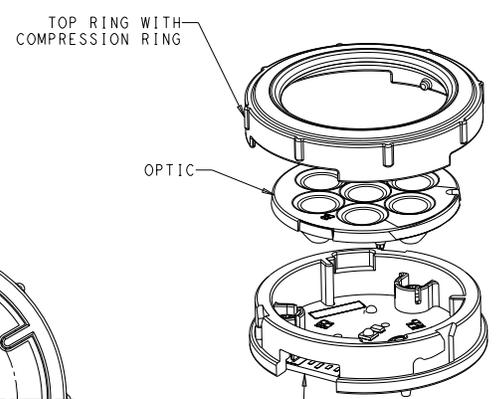
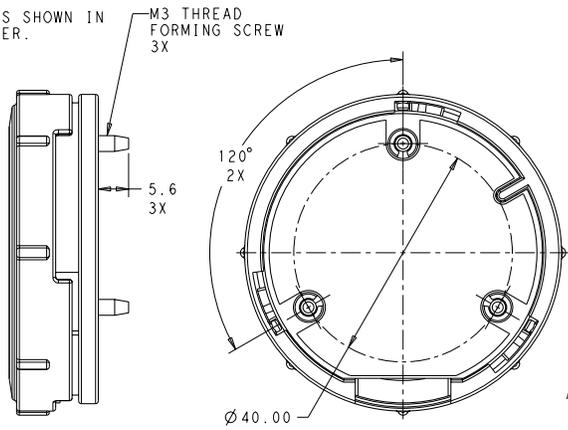



REVISIONS					
REV	DATE	BY	CHK	APPV	DESCRIPTION
1	27SEP2010	APB	MM		PROPOSAL
2	02DEC2010	MVS	MM		UPDATE GEOM: CHG DRIVE CUR. TO 350-1000
3	02FEB2011	MM	MM		CLARIFY OPTIC INFORMATION

- MATERIALS:**
- LIGHT ENGINE: ALUMINUM PCB
 - THERMAL PAD: SILICONE
 - BASE HOUSING: GF PBT, COLOR: WHITE
 - SCREWS: STEEL
 - OPTIC: ACRYLIC
 - COMPRESSION RING: SILICONE
 - TOP RING: GF PBT, COLOR: WHITE

- MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING
- REFER TO TYCO ELECTRONICS APPLICATION SPECIFICATION 114-13293 FOR PROPER HEAT SINK MOUNTING INFORMATION
- PRODUCT SHIPPED AS THREE SUB-ASSEMBLIES (AS SHOWN IN VIEW A) WITHIN THE SAME SHIPPING CONTAINER.

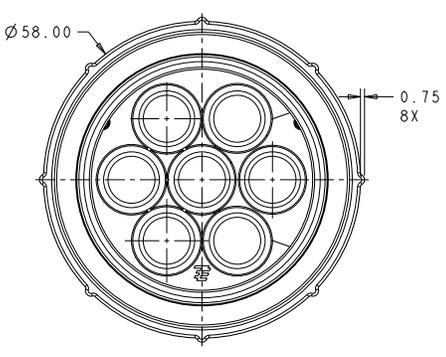

VIEW A
SCALE 3:2

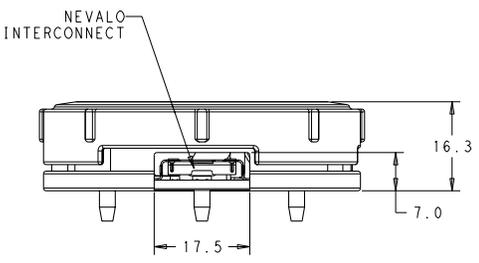

40	FLOOD	350-1000mA	4000K	CREE X-PG	1-2154196-3
25	NARROW FLOOD	350-1000mA	4000K	CREE X-PG	1-2154196-2
18	SPOT	350-1000mA	4000K	CREE X-PG	1-2154196-1
40	FLOOD	350-1000mA	3000K	CREE X-PG	2154196-3
25	NARROW FLOOD	350-1000mA	3000K	CREE X-PG	2154196-2
18	SPOT	350-1000mA	3000K	CREE X-PG	2154196-1

DISTRIBUTION BEAM ANGLE	BEAM DISTRIBUTION	DRIVE CURRENT	CCT	LED	PART NO.
-------------------------	-------------------	---------------	-----	-----	----------

DESIGN APPROVED THIS PRINT IS
PRELIMINARY
 TO FIRST PIECE APPROVAL
 CONTACT PRODUCT ENGINEERING
 BEFORE USING THIS PRINT

DATE: 27SEP2010	BY: C. DAILY	CHK: M. MOSTOLLER	APPV: M. MOSTOLLER	NAME: M. MOSTOLLER	TYCO ELECTRONICS CORPORATION Harrisburg, PA 17105-3608
DIMENSIONS: mm	0 PLC	1 PLC	2 PLC	3 PLC	4 PLC
	Ø	Ø.2	Ø.10	Ø	Ø
	°	°	°	°	°
	°	°	°	°	°
MATERIAL: -	FINISH: -	WEIGHT: -	CUSTOMER DRAWING	SHEET 2:1	SHEET 1 OF 3