
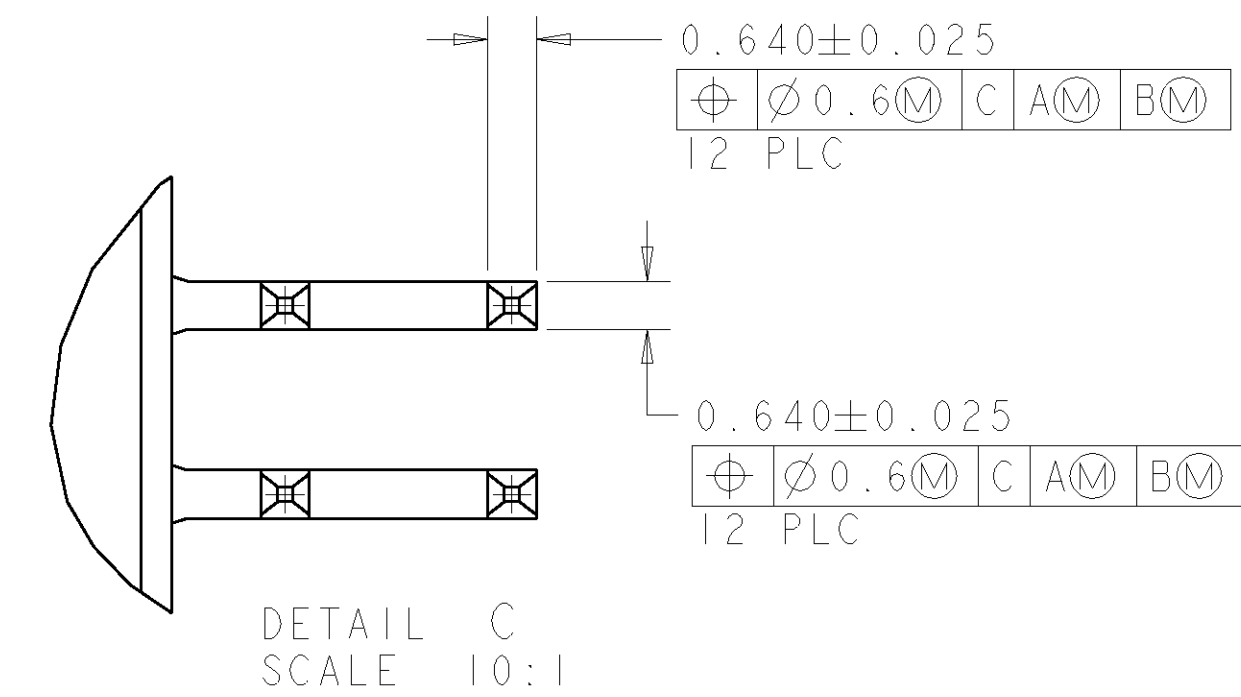
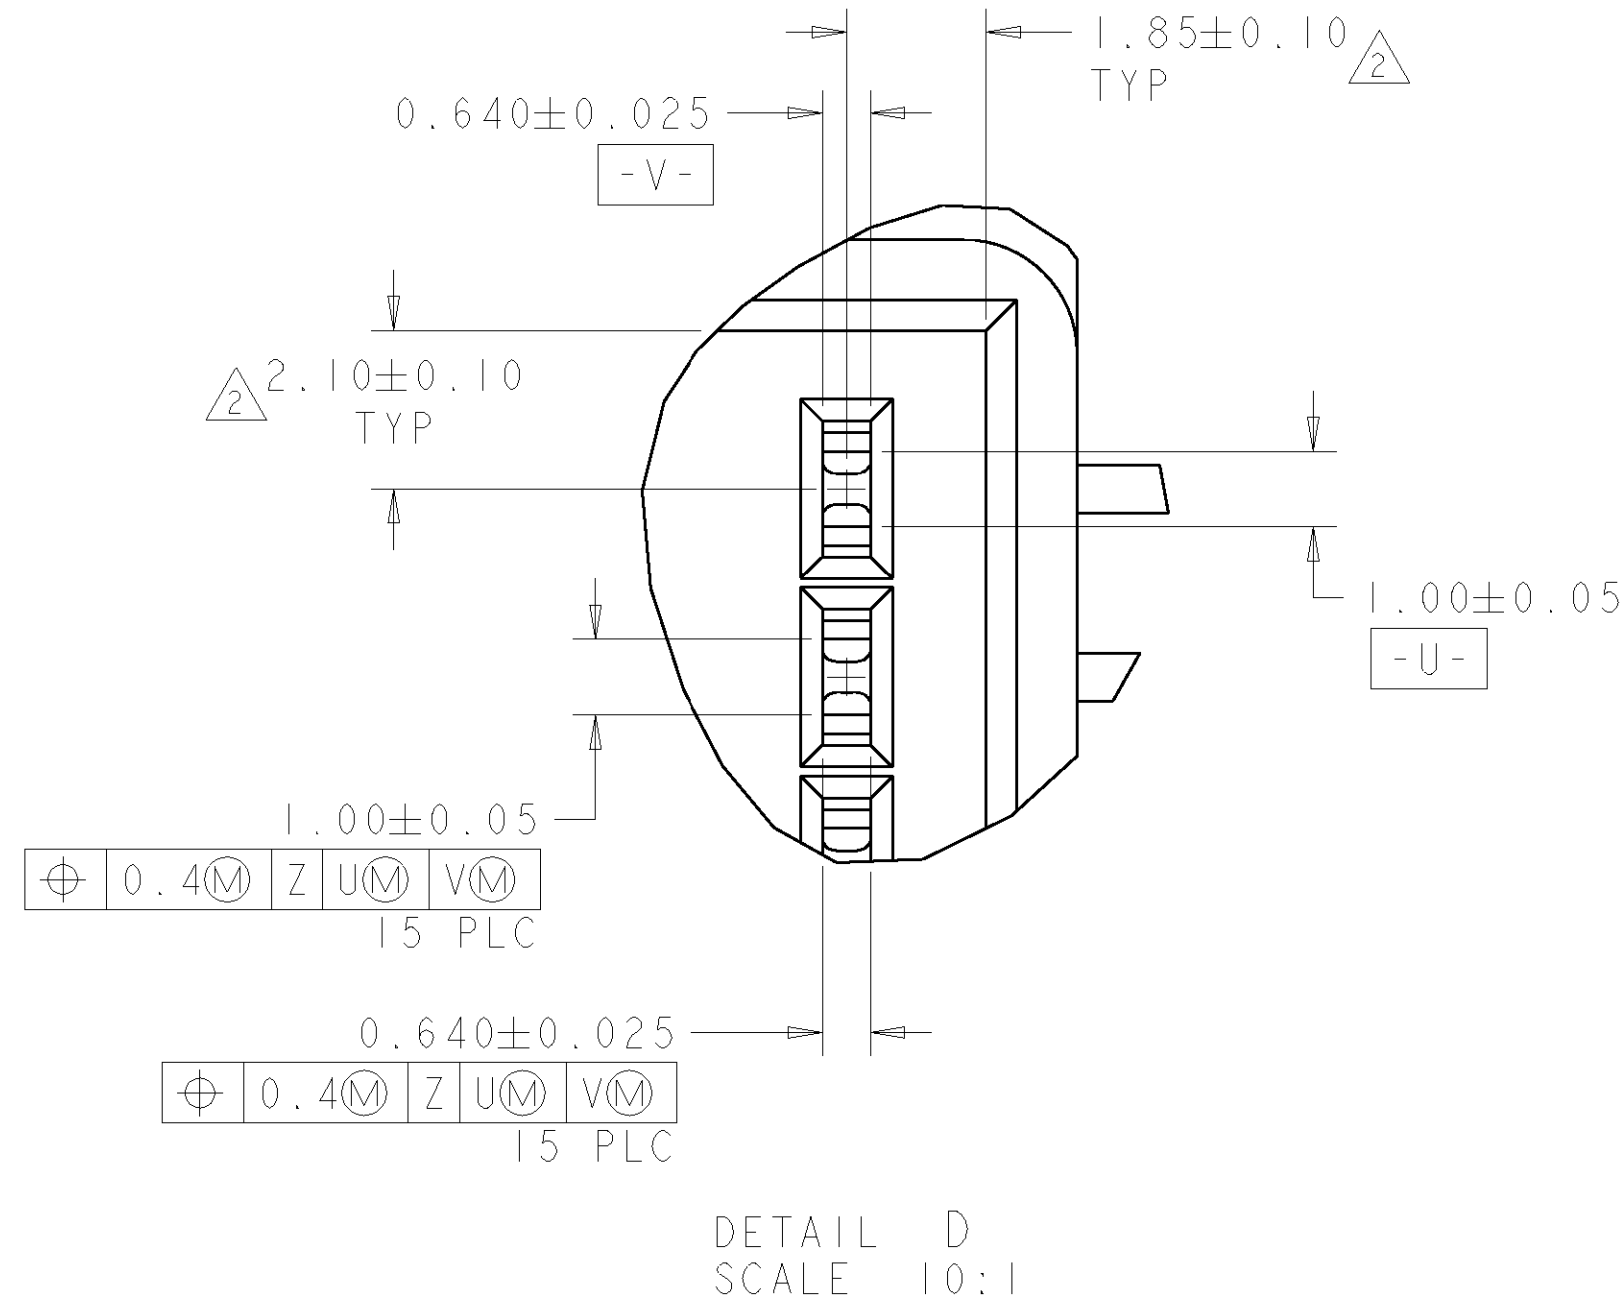
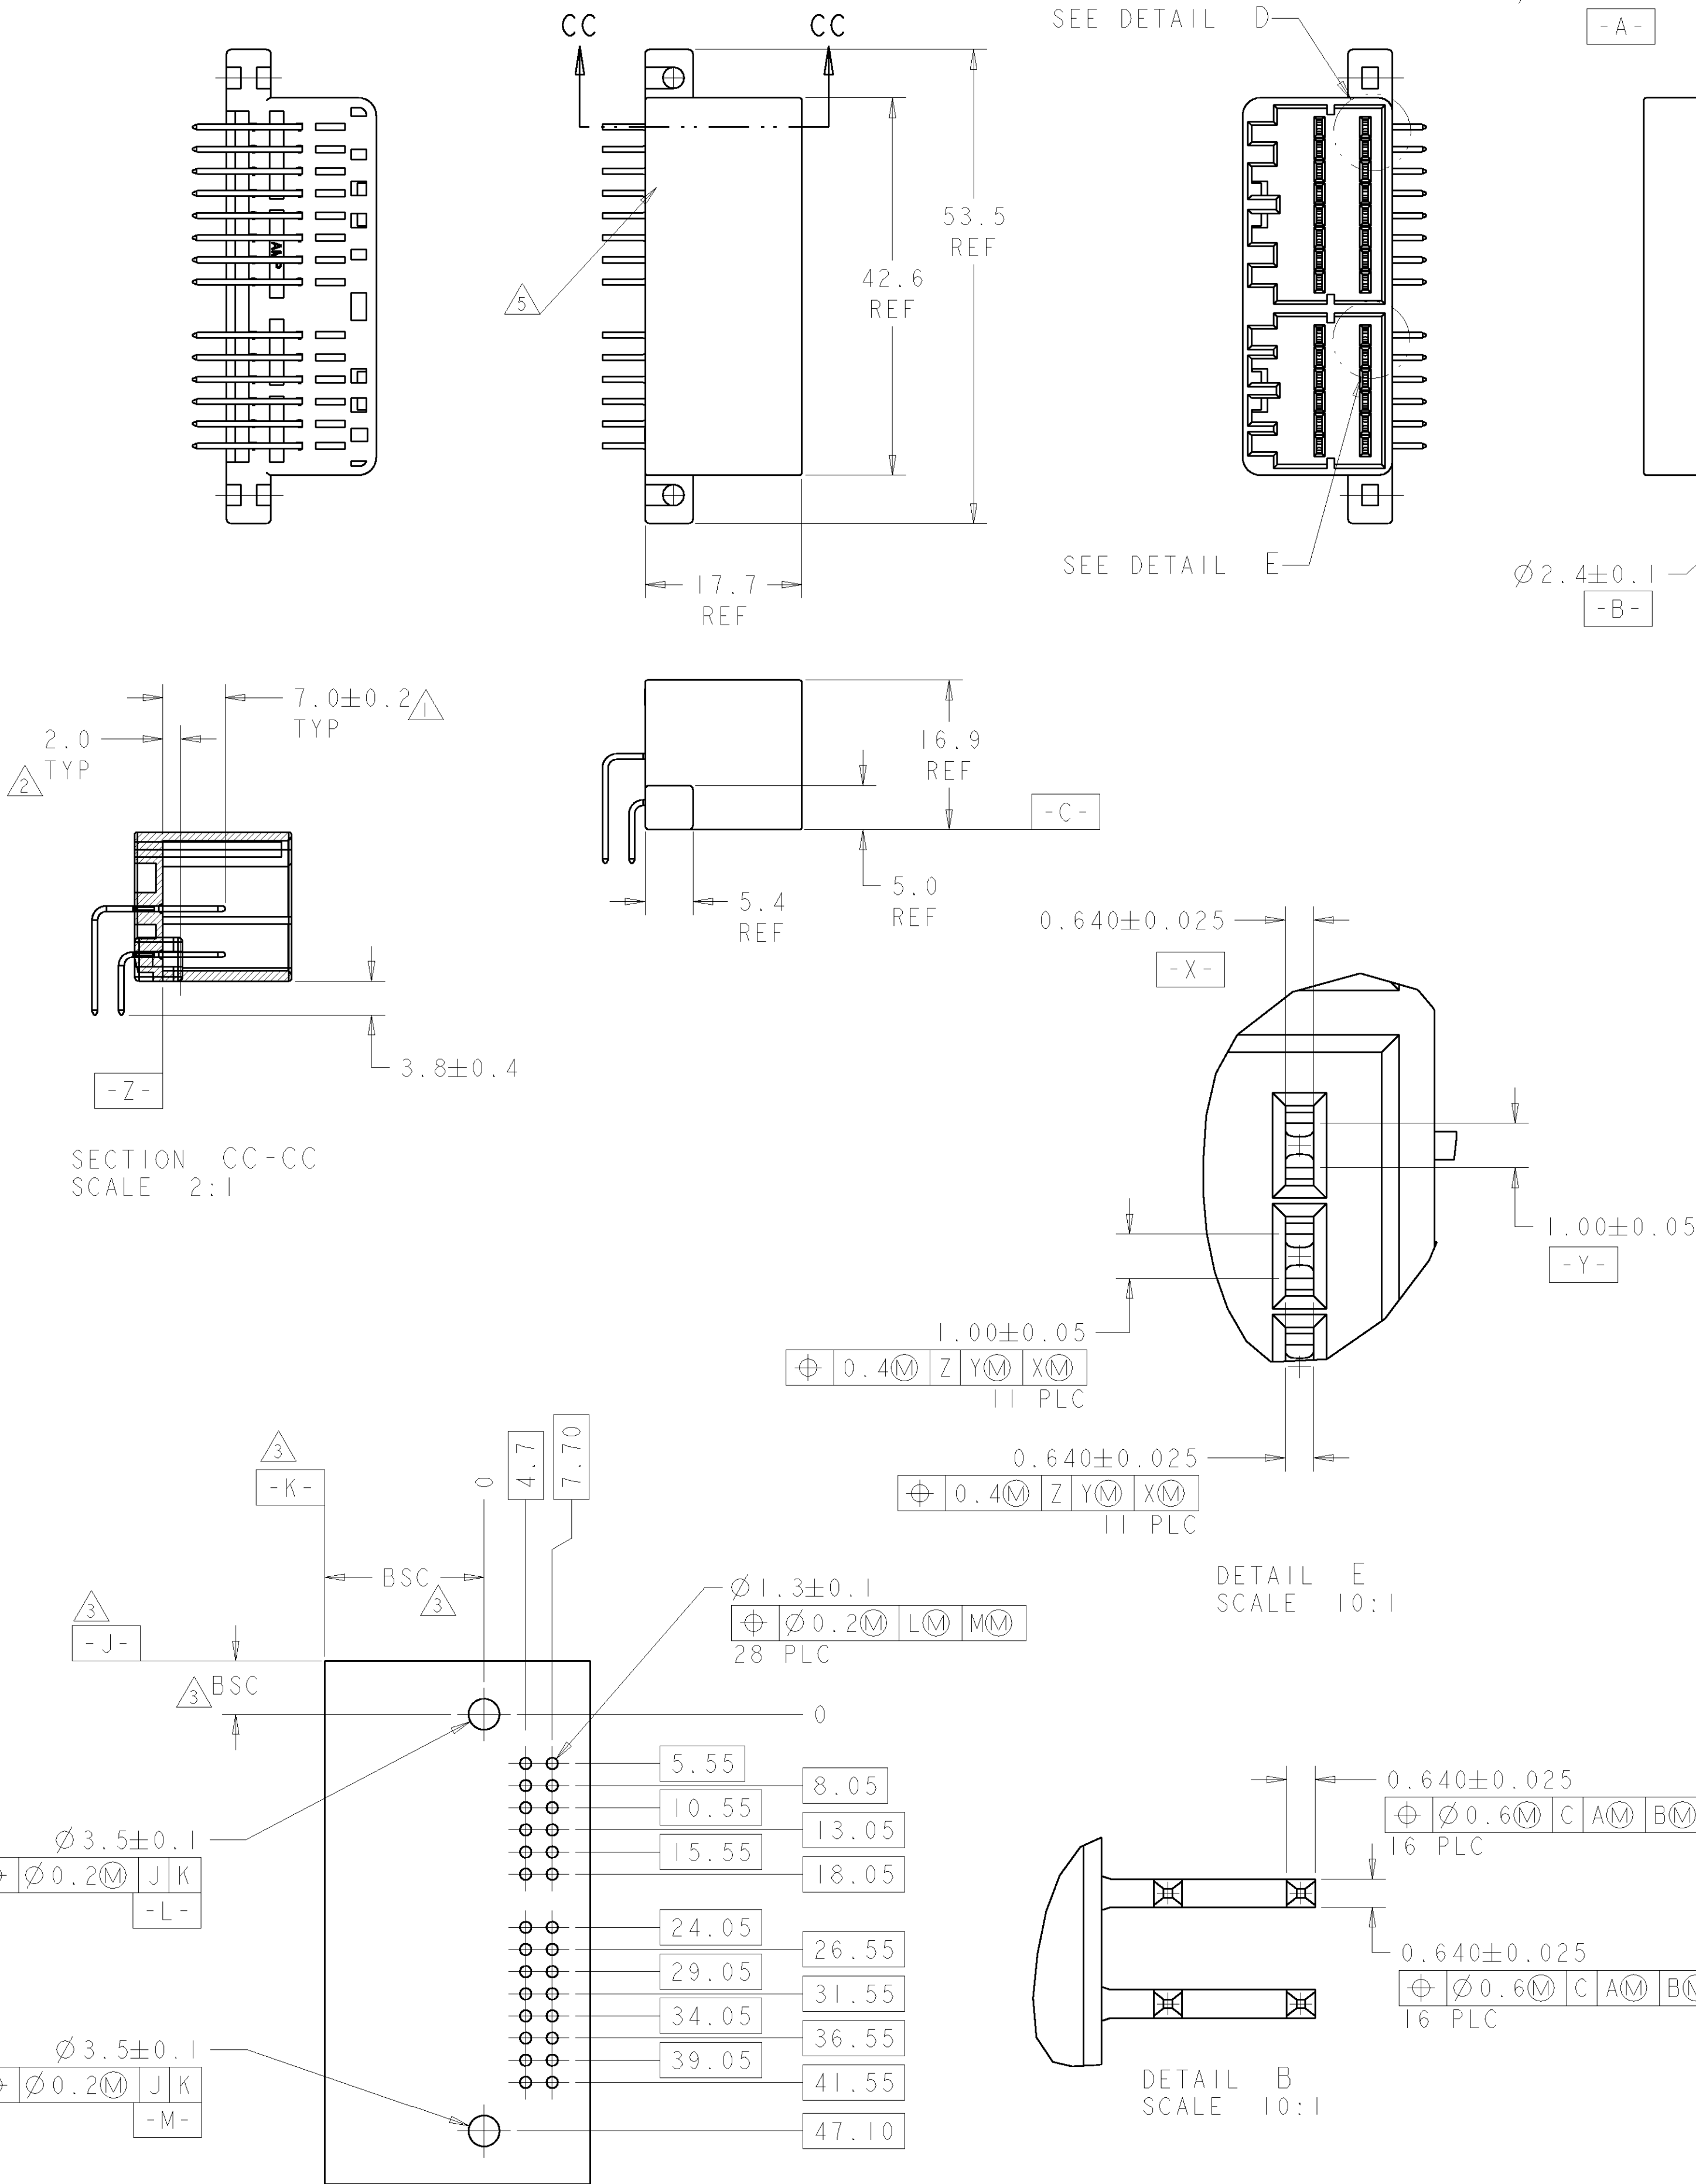


LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		0		REL PER PPR 20078	02OCT2000	JRB	GEM
		01		REV PER EC 0K80-0139-03	16MAY2003	DJA	SSA

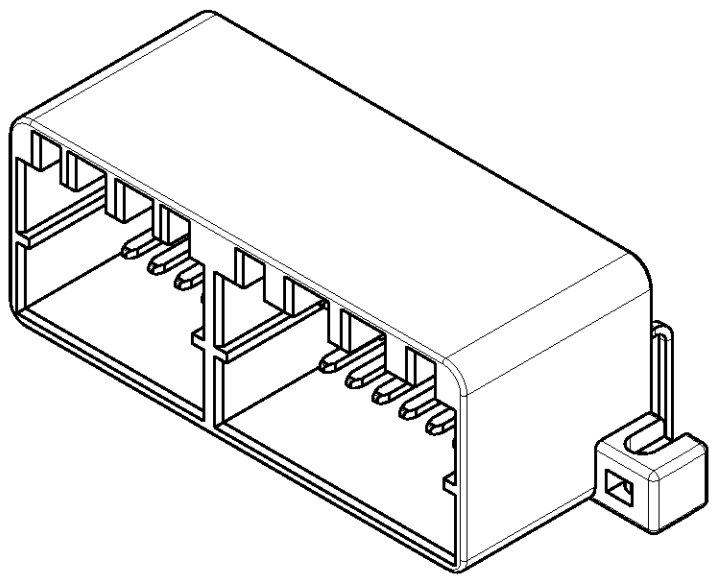

- 1 TAB RETENTION FORCE: 3kg MIN
- 2 DIMENSION MUST BE HELD BETWEEN -Z- AND 2.0 FROM -Z-
- 3 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 4 MATING PLUGS: 175965
175966
- 5 DATE CODE
- 6 RECOMMENDED MOUNTING SCREW, 3MM DIA X 6MM LG PAN HEAD SCREW, CLASS 2 TAPPING SCREW AS SPECIFIED IN JIS B1115 AND B1122. TIGHTENING TORQUE: 4KG-CM MAX.
- 7. SINGLE TUBE PACKAGING

BRASS	POST TIN	BLACK	9-638770-2
BRASS	POST TIN	NATURAL	9-638770-1
CONTACT MATERIAL	CONTACT FINISH	HOUSING COLOR	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN J MCNEAL 22SEP00		CHK G MILLER 22SEP00		APVD G MILLER 22SEP00		NAME CAP ASY, 28 POSN, HI TEMP HORIZONTAL 040 SERIES MULTILOCK, I/O CONN, MKII	
mm		9 PLC ±.3		PRODUCT SPEC		108-5281		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
Ø		3 PLC ±.15		WEIGHT		A 00779		C=638770		RESTRICTED TO	
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1		REV 01	

PC BOARD LAYOUT
RECOMMENDED THICKNESS: 1.6MM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-638770-1](#)