

MBC13720

First SiGe:C Standard Product


Overview

Freemscale Semiconductor's MBC13720 low noise amplifier (LNA) with an on-chip bypass switch is Freemscale's first SiGe:C standard product. This device uses the SiGe:C module of Freemscale's advanced 0.35 micron RF BiCMOS process. The on-chip bypass switch improves the dynamic range of the receiver with low insertion loss. In addition to providing improved performance, the bypass switch helps conserve board space and reduce system and manufacturing costs. The device also provides selectable IP3 modes, low noise figure, selectable gain settings and a standby mode to turn the device completely off. Input and output matching is performed externally to allow maximum design flexibility.

Features

- > Uses SiGe:C module of advanced RF BiCMOS process for superior performance in a cost-effective monolithic device
- > Integrated bypass switch
- > Low noise figure
- > High input IP3
- > Receive/enable pins
- > Selectable IP3 modes
- > Simplified off-chip matching
- > Packaged in ultra-small SOT-363 surface mount package
- > Usable frequency range of 400 MHz to 2400 MHz
- > Low standby current <20 microamps
- > Supply voltage from 2.5V to 3.0V
- > Lead-free


Key Parameters	Low IP3 Mode	High IP3 Mode	Bypass
>RF Gain			
900 MHz	19 dB	20 dB	-2.9 dB
1900 MHz	13 dB	14.5 dB	-2.5 dB
2400 MHz	11.5 dB	12 dB	-2.8 dB
>Current Consumption			
	5.0 mA	9.0 mA	10 μ A
>Noise Figure			
900 MHz	1.30 dB		
1900 MHz	1.38 dB		
2400 MHz	1.55 dB		
>Input IP3			
900 MHz	-3.0 dBm	10 dBm	29 dBm
1900 MHz	4.0 dBm	10 dBm	29 dBm
2400 MHz	6.0 dBm	13 dBm	25 dBm
>Input/Output Return Loss			
	10 dB	10 dB	12 dB
>Reverse Isolation			
	25 dB	20 dB	18 dB

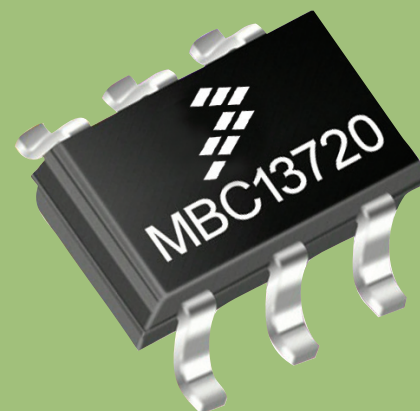

Types of Applications

The MBC13720 SiGe:C low noise amplifier with bypass switch can operate over a frequency range of 400 MHz to 2400 MHz. Applications include:

- > PCS 1900 MHz cellular telephones
- > 900 MHz and 2400 MHz industrial, scientific and medical (ISM) band designs

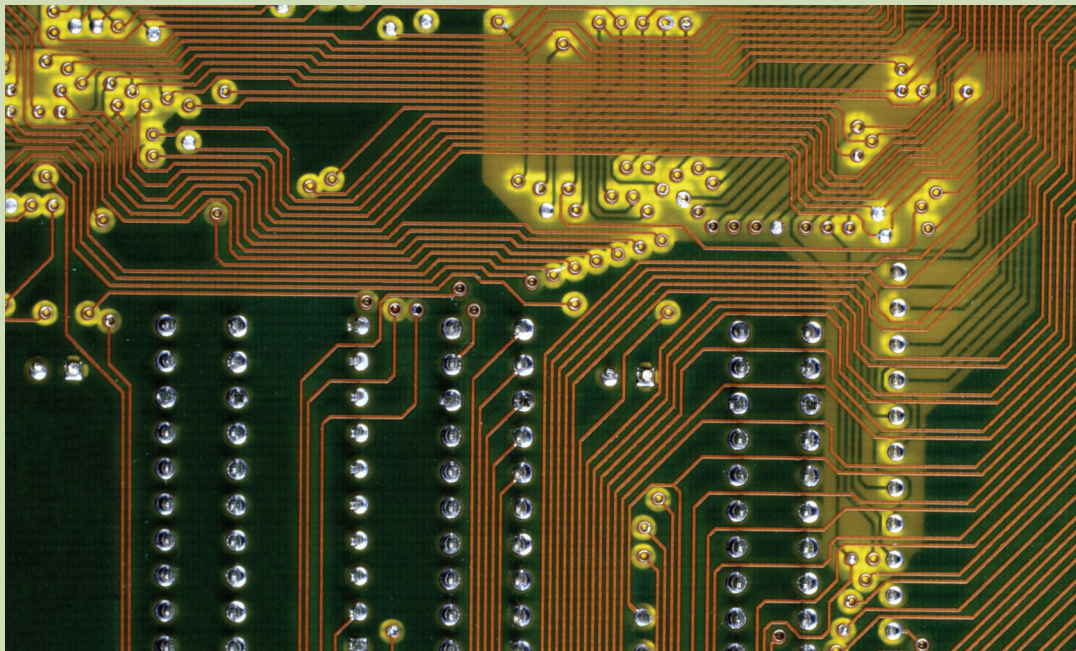

Benefits to You

- > Lowers system manufacturing costs due to integrated, on-chip bypass switch and gain control circuitry
- > Improves dynamic range of the receiver with integrated bypass switch
- > Provides improved receiver sensitivity through low noise figure
- > Smaller battery for portable applications with 2.7V operation and low current consumption of less than 20 microamps in standby mode
- > Maximizes design flexibility and efficiency with off-chip matching to optimize gain or noise figure
- > Provides higher circuit and system density with ultra-small SOT-363 surface mount package
- > Improved reliability due to lower power dissipation

A Solution for these Questions

- > Do you want to reduce part count and lower your system and manufacturing costs by using an LNA with on-chip bypass switch?
- > Do you want to improve the dynamic range and sensitivity of your receiver?
- > Would you like to improve the flexibility of your design by customizing the input/output matching to optimize gain or noise figure?
- > Does your design require that the battery size be reduced with a supply voltage as low as 2.7V and low power consumption?
- > Do you need to improve the IP3 performance of your design?
- > Do you want to reduce the PC board area for your portable RF product?

Evaluation Kit

An evaluation kit is available in a low- (900 MHz) or high- (1900 MHz) frequency version. Each kit contains both the MBC13720 and MBC13916 low noise amplifiers. Visit www.freescale.com to order 900MHZ-AMP-EVK or 1900MHZ-AMP-EVK.

Literature

A complete data sheet containing full specifications, characteristic curves and application circuit configuration is available at Freescale's Technical Information Center. www.freescale.com

Device Information

Device

MBC13720NT1

Operating Case

Temperature Range

$T_A = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Package in Tape and Reel

SOT-363*

*(3,000 units per 8 mm, 7 inch reel)

Learn More: For more information about Freescale products, please visit www.freescale.com.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Freescale Semiconductor:](#)

[1900MHZ-AMP-EVK](#) [900MHZ-AMP-EVK](#)