

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

90327-3368

Status:


Active

Overview:

Picoflex® Connectors

Description:

Picoflex® PF-50, Low Profile, IDT Receptacle, 12 Circuits, White, Palladium Nickel with Gold (Au) Flash Plated, Reeling Option B

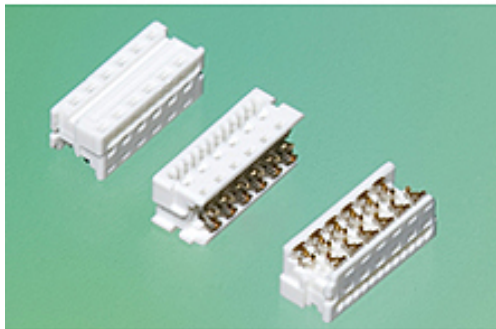

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-99020-0011 \(PDF\)](#)
- [Packaging Specification PK-90327-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Ribbon Cable / Wire Trap Connectors

Series

90327

Comments

Low Profile|Reeling Option B

Component Type

Housing

Glow-Wire Compliant

No

Overview

[Picoflex® Connectors](#)

Product Name

Picoflex®

UPC

800753530119

Physical

Circuits (Loaded)

12

Circuits (maximum)

12

Color - Resin

White

Durability (mating cycles max)

100

Entry Angle

Vertical

Flammability

94V-0

Lock to Mating Part

Yes

Material - Metal

Phosphor Bronze

Material - Plating Mating

Palladium Nickel

Material - Plating Termination

Gold

Material - Resin

Polyester

Net Weight

0.600/g

Number of Rows

2

PCB Locator

No

PCB Retention

None

Packaging Type

Bag

Pitch - Mating Interface

1.27mm

Pitch - Termination Interface

1.27mm

Polarized to Mating Part

Yes

Polarized to PCB

No

Shrouded

Fully

Stackable

No

Surface Mount Compatible (SMC)

N/A

Temperature Range - Operating

-40°C to +105°C

Termination Interface: Style

IDT or Pierce

Wire Insulation Diameter

1.00mm max.

Wire Size AWG

26, 28

Wire/Cable Type

Ribbon Cable

Electrical

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

90327Series

Mates With

Low Profile Vertical 90325 , Low Profile Right Angle 90800 , 90715 , 90814 , 90779 Vertical, 91714 1.27mm Pitch Picoflex® PF-50 Header

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Extraction Tool (Plastic) for 4-26 Circuit	0690081070
Extractor Tool for Connectors	0621006000
Semi-Automatic Bench Press PB14 for 4-26 Circuit	0691271001

Current - Maximum per Contact	1.2A	Semi-Automatic	<u>0691271004</u>
Voltage - Maximum	250V	PB14 Bench Press	
Material Info		with Auto De-reeling	
Reference - Drawing Numbers		Assembly of De-	<u>0691275045</u>
Packaging Specification	PK-90327-001	Tape Unit for	
Product Specification	PS-99020-0011	PB14 Part Number	
Sales Drawing	SDA-90327	069127-1001	

This document was generated on 04/03/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com