

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [94506-9000](#)
Status: **Active**
Overview: [Quick-Disconnect Terminals](#)
Description: Quick Disconnect Safelock Housing, accepts 6.35 x 0.81mm Female Tab Terminal, 14-20 AWG Wire, 1 Circuit

Documents:
[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Crimp Housings
Series [94506](#)
Application Power
Overview [Quick-Disconnect Terminals](#)
Product Name Quick Disconnect, Safelock
UPC 800754331449


Physical

Breakaway No
Circuits (maximum) 1
Color - Resin White
Flammability 94V-2
Gender Female
Glow-Wire Compliant No
Lock to Mating Part None
Material - Resin Nylon
Net Weight 0.572/g
Number of Rows 1
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface N/A
Pitch - Termination Interface N/A
Polarized to Mating Part No
Temperature Range - Operating -40°C to +105°C

Material Info

Reference - Drawing Numbers

Sales Drawing SD-94506-001

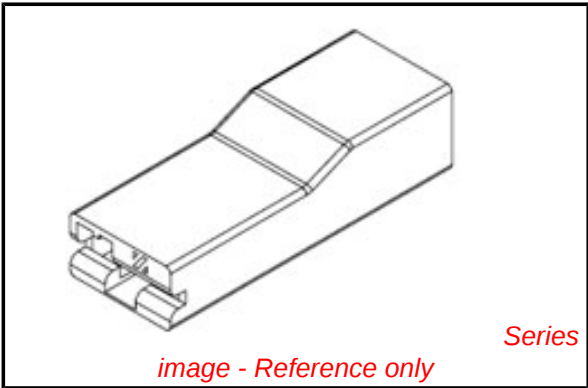

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[94506Series](#)

Use With
[94506-0100](#)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

94506-9000