

[Product Catalog for CHIM Partner Support](#) > [Electrical Products](#) > [Electrical Terminals](#) >

[Printer-friendly format](#) **3M™ Scotchlok™ T-Tap Nylon Insulated Self-Stripping Female QuickSlide Disconnect 953X, 22-18 AWG**



This female disconnect accepts a 12 AWG and has case quantities of 500 per case.

[\[click to enlarge\]](#)

GTIN(UPC/EAN) : 0 00 54007 12314 9
3M Id : 80-0140-0084-0

Additional Information

Use to electrically tap into a wire in mid-span without cutting or stripping the wire. Connector then mates with a .250 inch (6.35 millimeter) male tab, making a reusable quick-connect wiring termination. T-tap disconnect. Maximum insulation O.D. diameter of 0.150 inches (3,81 mm) and a operating temperature of 221°F (105°C). The suggested application tool for this connector is the E-9BM

[Full Text . . .](#)

Learn More . . .

[Packaging Data](#)

[3M™ Scotchlok™ SSE Tap Connectors 951, 952, 953 - Data Sheet \(PDF 83.2 K\)](#)

[901,951,952,953 Connection Type - Illustration/Line Art \(TIFF 5.2 K\)](#)

[Female Disconnects - T-Tap Nylon Insulated Self-Stripping - Product Selection Guide \(PDF 13.3 K\)](#)

[Ordering Information for Scotchlok™ 953 Insulation Displacement - Product Selection Guide \(HTML 1.5 K\)](#)

[Terminal Stud Size Chart - Product Selection Guide \(PDF 5.2 K\)](#)

Please Note:

Adobe® Acrobat® Reader is required to view PDF documents.



- ▼ CHIM Partner Support
 - ▼ Product Catalog for CHIM Partner Support
 - 3M™ Insect Repellents
 - Adhesives
 - Animal Care Products
 - Audio/Video Accessories
 - Automotive Products
 - Bulk Abrasive Products
 - Command™ Products
 - Commercial Cleaning Products
 - Consumer Health Care Products
 - Drywall Abrasives
 - **Electrical Products**
 - Energy Saving Products
 - Ergonomic Products
 - Filtrete® Air Filters
 - Finesse-it™ Products
 - Fire Protection Products
 - Floor Surfacing Abrasives
 - Hand & Power Sanding Abrasives & Sanding Sponges
 - Home Care Products
 - Laminating Products
 - Lint Removal Products
 - Marine Products
 - Masking Systems Products
 - Miscellaneous Products
 - Office Air Filters & Computer Filters & Access
 - Post-it®, Highland & 3M™ Notes
 - Safety Products
 - Sanding Screens
 - Scotch™ Reclosable Fasteners
 - Tapes



Scotchlok™

Self-Stripping Electrical Tap Connectors 951, 952, 953



Data Sheet

Application

Use Scotchlok™ Tap Connectors 951, 952, or 953 to electrically tap into a wire in mid-span without cutting or stripping the wire. Connector then mates with a .250" (6.35 mm) male tab, making a reusable quick-connect wiring termination.

Wire Ranges

(See table for specific connector wire range) 22-12 AWG solid or stranded tinned or untinned (.5-3.0 mm sol. or str.) copper conductors. For use with common thermoplastic insulated wires such as: T, TW, TF, TFF, TFFN, THHN, AWM, TEW, SAE-GPT with a maximum wire insulation diameter of .150 inches (3.8 mm). Maximum recommended connector current:

22 AWG - 3.0 Amps	20 AWG - 4.0 Amps
18 AWG - 7.5 Amps	16 AWG - 10 Amps
14 AWG - 15 Amps	12 AWG - 20 Amps

Conn.#	Color	Wire Range (AWG-mm²)	Weight lb./gm
951	RED	22-18 (0,5-0,8)	.0023 (1,04)
952	BLUE	18-14 (0,8-2,0)	.0023 (1,04)
953	YELLOW	12 (3,0)	.0022 (1,00)

Construction

Element - Tin plated brass, .03 in. (.8 mm) thick
Insulator - Flame retardant nylon,
See table for color

Recommended Installation Tools

3M™ Crimping Tool No. E-9BM
Mechanics (slip joint) Pliers


Installation Instructions

⚠ WARNING

Turn power off before installing or removing terminal. All electrical work should be done according to appropriate electrical codes.

1. Do not strip run wire.
2. Place run wire in open channel.
3. Fold connector body until element contacts wire.
4. Crimp connector closed with pliers.
5. Slide completed T-Tap onto male tab.

Note: Tab not included. Suitable for field or factory installation. For field wiring, a suitable UL Recognized strain relief device is required.

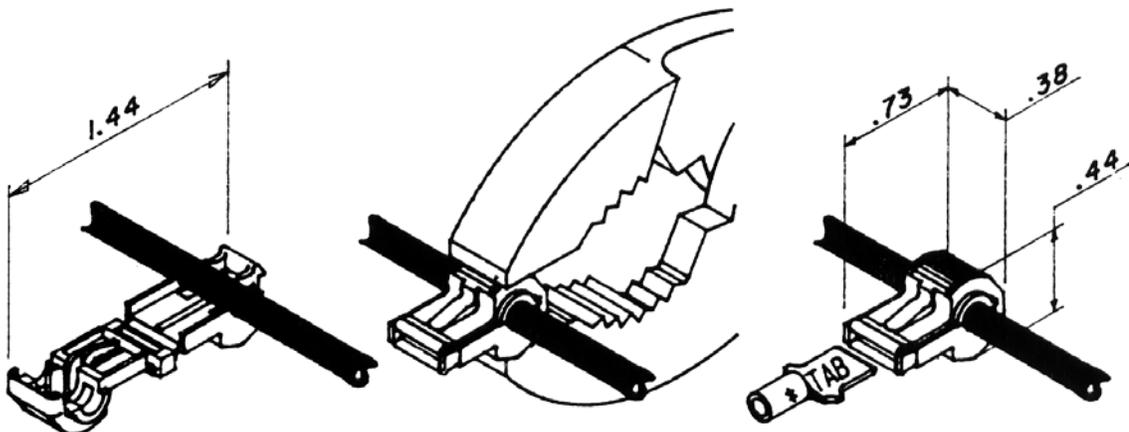

Regulatory Agencies

UL Listed - Tested per UL Standard 486C

UL file No. E23438

Voltage rated at 600 volts maximum, building wire:

1000 volts maximum, signs and fixtures.

Temperature rated at 105°C (221°F).

Note: UL Listed for AWG only.

CSA Certified-CSA Standard C22.2 No. 0, 188-M1983

CSA File No. LR15503

Operating Temperature: 105°C (221°F)

Voltage Rating: 600 volts max. building wire

1000 volts max. signs and luminaires.

Flammability Rating: C22.2 No. 0.6 V-2

Engineering Specification


Self-Stripping T-Tap Female Quick-Slide connector (as manufactured by 3M) capable of connecting to an insulated, solid or stranded copper wire, in mid-span, without cutting or stripping the wire; and of connecting to a .250 in. x.032 in. Male Tab such as a MNG14-250DMI, in a separable, reusable manner, forming a Quick Connect Wiring Termination.

The electrical connecting element shall be tin plated brass: the insulator body shall be molded nylon, color coded to run wire size: Part Nos. 951 Red (22-18 AWG), 952 Blue (18-14 AWG), 953 yellow (12 AWG). Connector shall be UL Listed and CSA Certified for 600 volts maximum, building wire: 1000 volts maximum, signs and fixtures, and temperature rated 105°C (221°F) maximum.

Federal Specification W-S-610D

“Commercial Packaging”

Type	Class	Kind	Style
II	I	Cu	F



Tap Connector

3M and Scotchlok are trademarks of 3M Company.



is a trademark of Underwriters Laboratories.



is a trademark of Canadian Standards Association.

IMPORTANT NOTICE

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture as of the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**

3M

Electrical Products Division

6801 River Place Blvd.

Austin, TX 78726-9000

www.3M.com/elpd

Litho in USA

©3M 2003 78-8126-5922-1-A