



Bestückungsplan - contact layout




- 1) $\phi 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\phi 0.6 \pm 0.05$ Diameter of finished plated-through hole
- 2) 0.7 ± 0.02 Bohrungsdurchmesser des Loches
 0.7 ± 0.02 Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406


Metal plating of plated-through hole
see drawing 114406

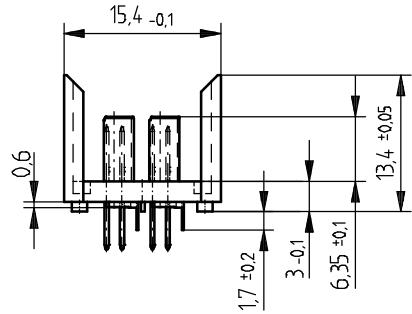


Kontaktversionen, Messerkontakte
Contact Selection Options, Male Contacts

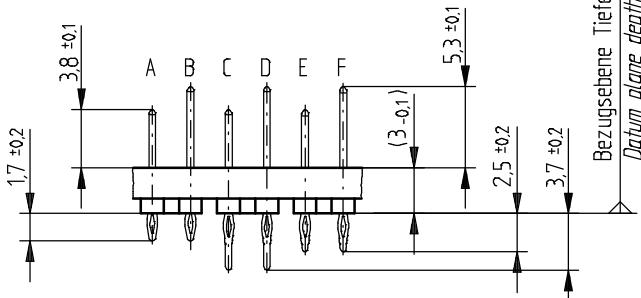

Kontaktversionen, Schirmesser
Contact Selection Options, Shielding Contacts

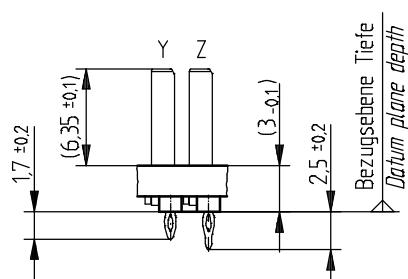

Lochbild für Leiterplatte (Bestückungsseite)
Board hole pattern (Component mounting side)

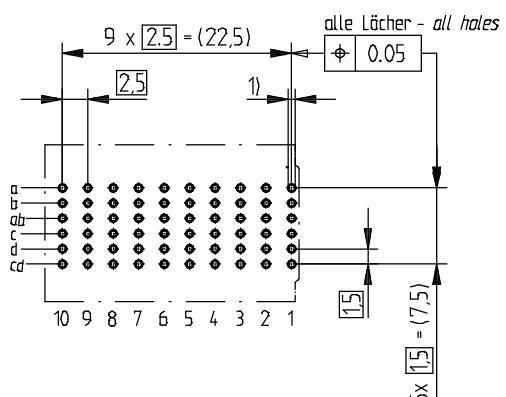

Bei Änderung Variante 223556 (auf Transportpalette) beachten!

Information: D + Y siehe Bestückungsplan / see contact layout Anforderungsstufe 2 / class 2	Tolerances All Dimensions in mm	Scale 2:1
Consider protection memo from DIN 34	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.
	ERNI	www.ERNI.com
C Index	04.11.2005 Date	H.00053954.SZA ERMZD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[973056](#)