



GE Fanuc Series 90-30 Digital Output 16 Channel

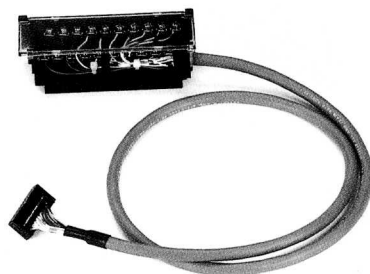

GE Fanuc Series 90-30 Digital Output 16 Channel

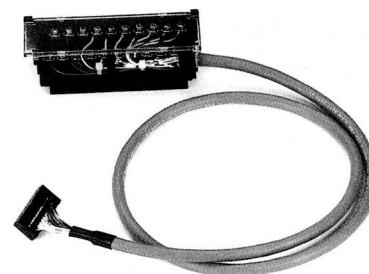

Technical Data

Technical Data			3 wire 2 wire 120 VAC	2 wire 24 VDC	2 wire Fused 24 VDC	2 wire 24 VDC	2 wire 24-120 VAC/DC
Type	IC693MDL		340	740, 742	740, 742	741	940
Part number	Cable Length	1.0 m	915817	998066	919746	919753	998076
		2.0 m	915822	998068	919751	919758	998078
Rated voltage			See Above		See Above		
Rated current per signal line			3.0 A per circuit/12.0 per cable		3.0 A per circuit/12.0 per cable		
Cable connection			(1) 1 x 20 pin IDC		(1) 1 x 20 pin IDC		
Operating temperature			-20°C...+50°C		-20°C...+50°C		
Storage temperature			-20°C...+60°C		-20°C...+60°C		
Approvals			 		 		
			Connection Wiring		Connection Wiring		

	IDC Conn	Wire Color	3 wire 2 wire 120 VAC	2 wire 24 VDC		IDC Conn	Wire Color	2 wire Fused 24 VDC	2 wire 24 VDC	2 wire 24-120 VAC/DC	
	01	Blk	9	1		01	Blk	1	10	1	
	02	Bm	19	11		02	Bm	11	20	6	
	03	Red	1	2		03	Red	2	2	2	
	04	Org	2	3		04	Org	3	3	3	
	05	Yel	3	4		05	Yel	4	4	4	
	06	Gm	4	5		06	Gm	5	5	5	
	07	Blu	5	6		07	Blu	6	6	7	
	08	Violet	6	7		08	Violet	7	7	8	
	09	Gray	7	8		09	Gray	8	8	9	
	10	White	8	9		10	White	9	9	10	
	11	Wht/Blk	11	12		11	Wht/Blk	12	12	12	
	12	Wht/Bm	12	13		12	Wht/Bm	13	13	13	
	13	Wht/Red	13	14		13	Wht/Red	14	14	14	
	14	Wht/Org	14	15		14	Wht/Org	15	15	15	
	15	Wht/Yel	15	16		15	Wht/Yel	16	16	17	
	16	Wht/Gm	16	17		16	Wht/Gm	17	17	18	
	17	Wht/Blu	17	18		17	Wht/Blu	18	18	19	
	18	Wht/Violet	18	19		18	Wht/Violet	19	19	20	
	19	Wht/Gray	N/C	10		19	Wht/Gray	10	1	11	
	20	Wht/Blk/Bm	N/C	20		20	Wht/Blk/Bm	20	11	16	