


76mm**San Ace B76****General Specifications**


- Material.....Frame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-0)
- Expected LifeRefer to specifications (L10:Survival rate: 90% at 60°C ,
rated voltage, and continuously run in a free air state)
- Lead Wire⊕red ⊖black (Sensor) yellow
- Storage Temperature ...-30°C to +70°C (Non-condensing)

76mm×20mm [Mass : 58g] **9BD type****Specifications** The following nos. **have pulse sensors.**


Model No.	Rated Voltage [V]	Operating Voltage Range [V]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]		Max. Static Pressure [Pa] [inchH ₂ O]		SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9BD12SC6-1	12	5 to 13.8	0.28	3.36	4,500	0.29	10.2	300	1.20	43	-20 to +70	40,000/60°C (70,000/40°C)
9BD12HC6-1		5.5 to 13.8	0.21	2.52	4,200	0.27	9.5	230	0.92	41		
9BD12FC6-1			0.18	2.16	3,900	0.25	8.8	200	0.80	39		
9BD24SC6-1	24	10 to 27.6	0.14	3.36	4,500	0.29	10.2	300	1.20	43		
9BD24HC6-1			0.12	2.88	4,200	0.27	9.5	230	0.92	41		
9BD24FC6-1			0.10	2.4	3,900	0.25	8.8	200	0.80	39		

Other sensor specifications are available as options. Please refer to the index (p. 500).

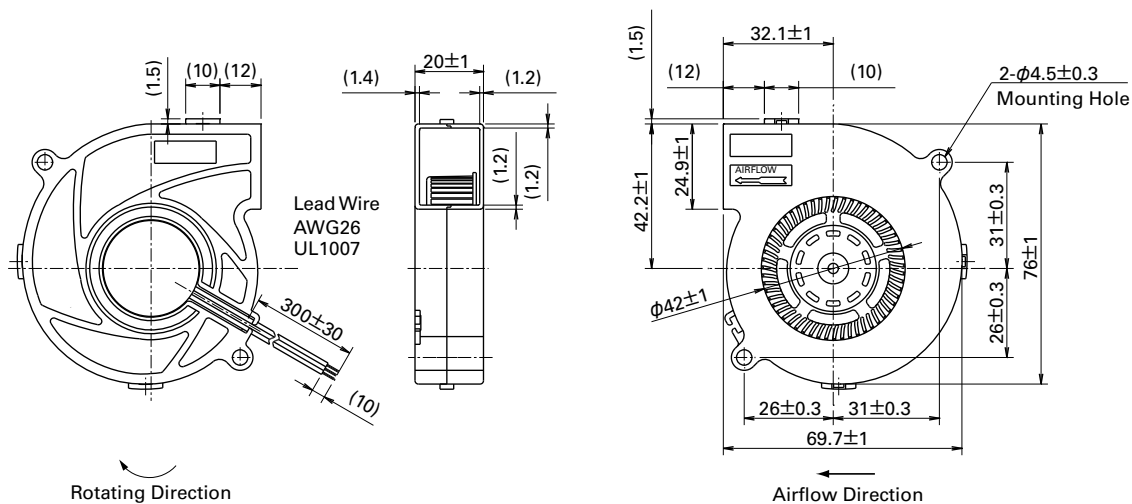
Dimensions (unit: mm)

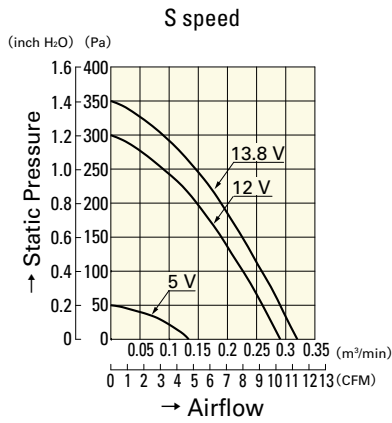


9BD12SC6-1

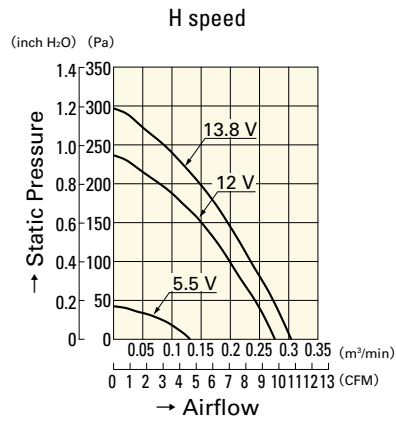


9BD12HC6-1

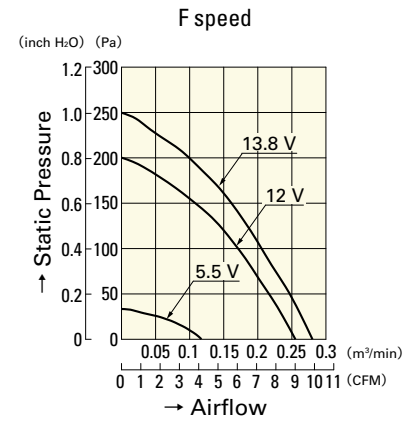


9BD12FC6-1

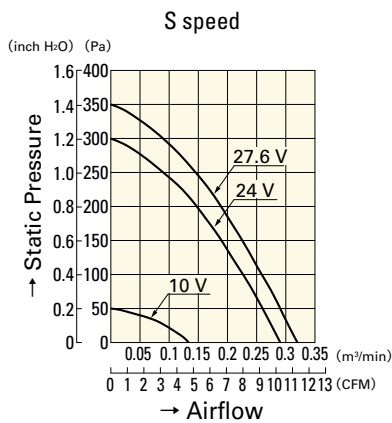

9BD24SC6-1

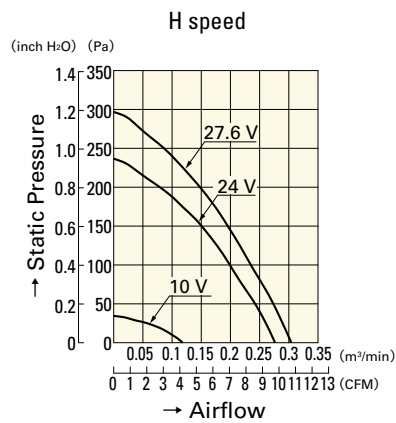

9BD24HC6-1

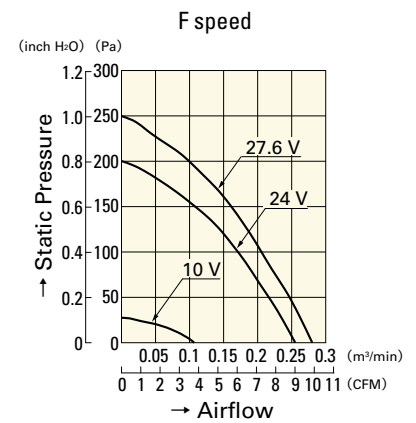

9BD24FC6-1

DC

Blower 76mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9BD12SC6-1](#) [9BD12FC6-1](#) [9BD12HC6-1](#) [9BD24HC6-1](#) [9BD24FC6-1](#) [9BD24SC6-1](#)