

40mm sq.

San Ace 40



■ General Specification

- MaterialFrame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-1)
- Expected LifeRefer to specifications (L10:Survival rate:90% at 60℃ ,
rated voltage, and continuously run in a free air state)
- Lead WireInlet ⊕red ⊖black Sensor yellow Control brown
Outlet ⊕orange ⊖gray Sensor purple Control white
- Storage Temperature-30℃ to +70℃ (Non-condensing)

40×40×48mm (Mass : 80g) **9CRA type**


Specifications The following nos. have PWM controls and pulse sensors.

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	PWM duty cycle※ [%]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹] Inlet Outlet	Max. Airflow [m³/min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9CRA0412P4K03	12	10.8 to 13.2	100	1.60	19.20	17,500 11,700	0.920 32.50	650.0 2.610	64	-20 to +70	40,000/60°C
			0	0.19	2.28	5,250 3,510	0.276 9.75	58.5 0.235	33		
9CRA0412P4J03			100	1.20	14.40	16,200 10,800	0.850 30.00	560.0 2.250	62		
			0	0.15	1.80	4,500 3,000	0.236 8.33	43.2 0.173	28		
9CRA0412P4G03			100	1.00	12.00	14,700 9,800	0.770 27.20	460.0 1.850	59		
			0	0.15	1.80	4,410 2,940	0.231 8.16	41.4 0.166	28		


※PWM Frequency : 25kHz

Models without sensors or with pulse sensors (no PWM function) are available as options. Please refer to the index (p. 471).

■ Dimensions (unit: mm)

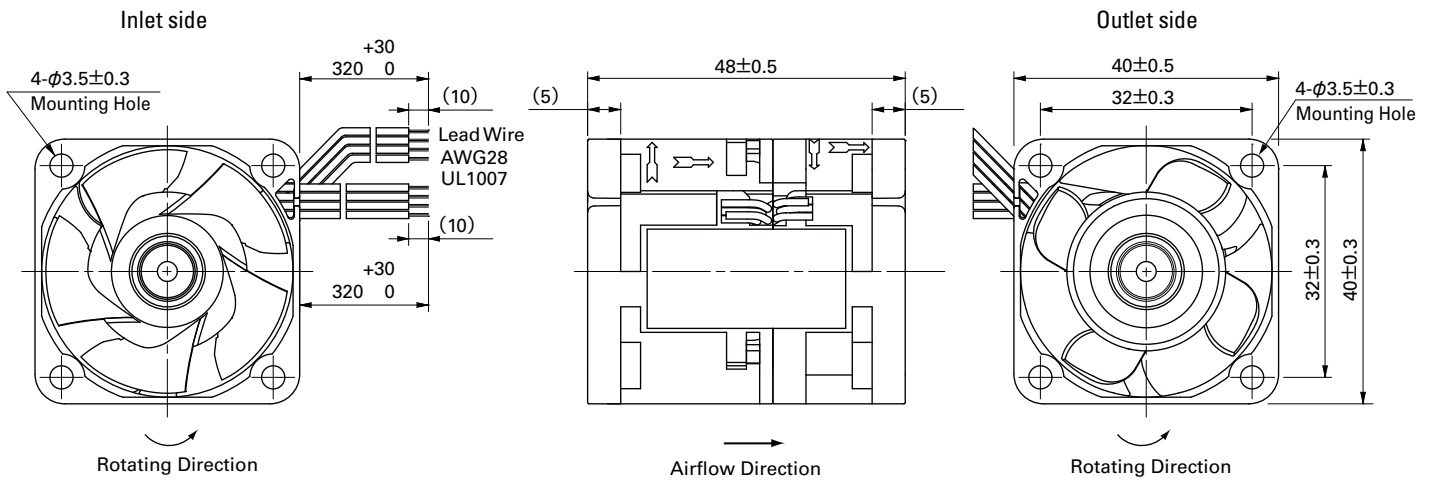


■ Reference Dimensions of mounting holes and vent opening (unit: mm)

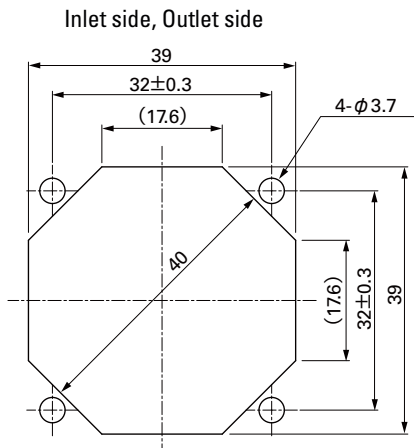

■ **Options (unit: mm)**

Finger Guards


Model : 109-059 Surface treatment : Nickel-chrome plating (silver)
: 109-059H : Cation electropainting (black)

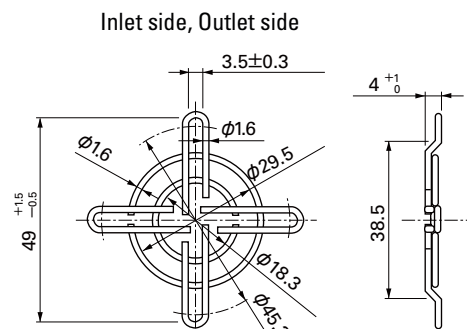


Mass : 7g

Airflow - Static Pressure Characteristics


PWM Duty Cycle

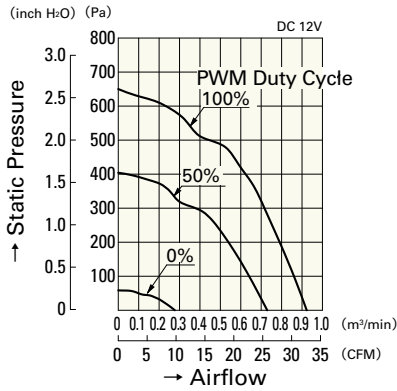

9CRA0412P4K03

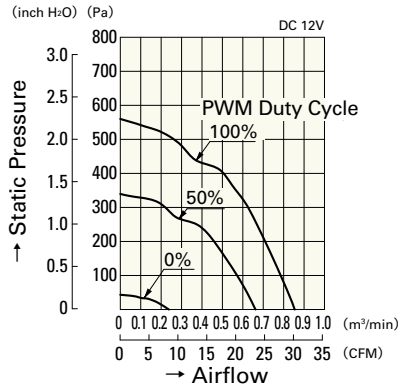


9CRA0412P4J03

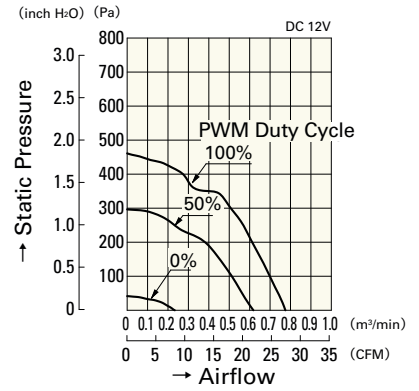


9CRA0412P4G03


Operating Voltage Range

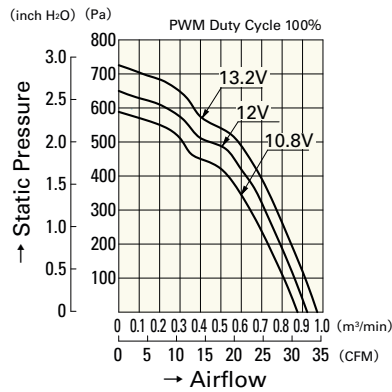

9CRA0412P4K03

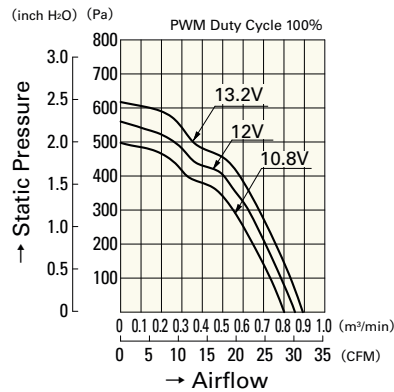


9CRA0412P4J03

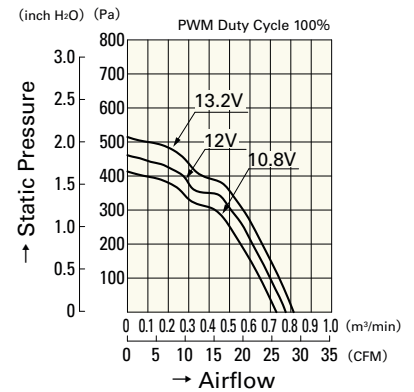


9CRA0412P4G03


PWM Duty - Speed Characteristics Example

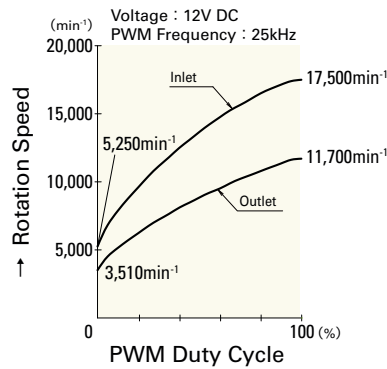

9CRA0412P4K03

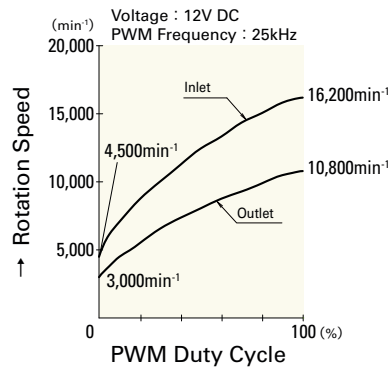

9CRA0412P4J03

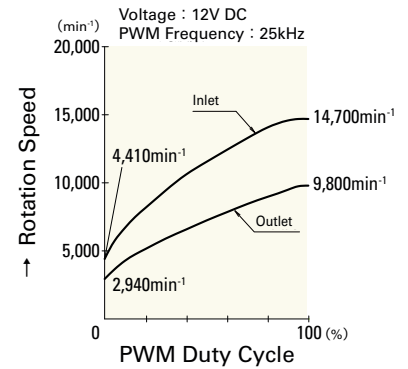

9CRA0412P4G03

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9CRA0412P4J03](#) [9CRA0412P4G03](#) [9CRA0412P4K03](#)