


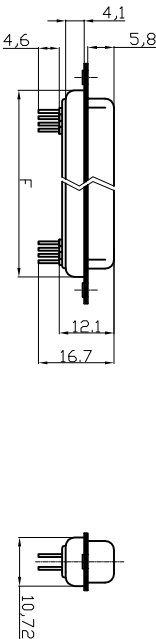






	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

Female

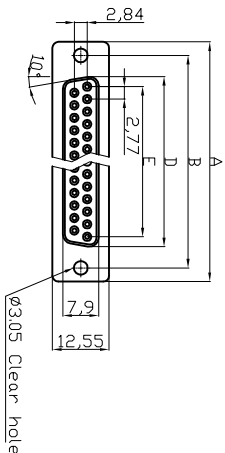

RECOMMENDED PCB LAYOUT

- NOTES:**
- MATERIAL**
1. Insulator Material: Glass-filled thermoplastic PBT, UL94V-0, Gray
 2. Contact Material: Copper alloy
 3. Shell :Steel, 100 μ" Tin Over 50μ" min Copper
 4. Contact plating : Gold flash full gold
- ELECTRICAL**
1. Current Rating : 3AMP
 2. Voltage Rating : 250V AC/rms 60Hz
 3. Contact Resistance: 20mΩ Max at 1 AMP DC
 4. Insulation Resistance: 1000MΩ at 500 VDC
 5. Withstand Voltage: 1000V AC/rms 60Hz for 1 minute
 - ② 6. OPERATING TEMPERATURE:-20°C+105°C
 - ② UL No. E198287

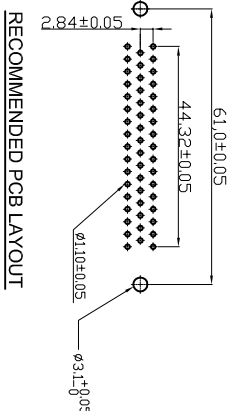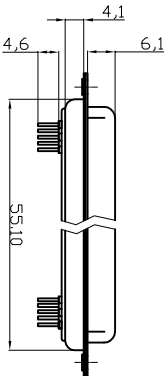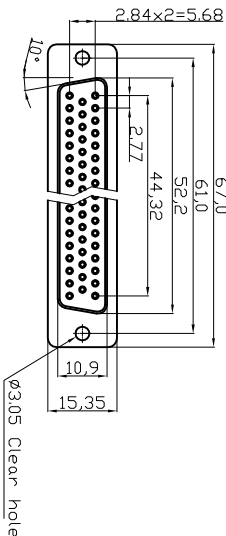

RECOMMENDED PCB LAYOUT

Dimensions						
Positions	A±0.15	B±0.10	D±0.13	E±0.08	F±0.10	
09	30.81	24.99	16.33	11.08	19.20	
15	39.20	33.30	24.70	19.39	27.70	
25	53.05	47.04	38.40	33.24	41.10	
37	69.40	63.50	54.80	49.86	57.30	

50 POSITIONS

Scale	Free					
TOLERANCE						
X.	±0.38				Drawn	15.08.2012
X.X	±0.25				Approved	04.08.2014
X.XX	±0.13	②	Update the operating temperature&UL No.		Winnie	
DIM	TOL	①	Update		Winnie	24.10.2012
X.°	±3°					
X.X°	±1.0°	①	Drawn		Lucas	15.08.2012
Angle	TOL	Id.	Modification		Date	Name

RoHS compliant

Unit: mm



Customer-No.

ASSMANN WSW-No.

A-DX XX PP/Z

Drawing-No.

ASS 4885 CO

rev02

Replace

Sheet 2/2

	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--