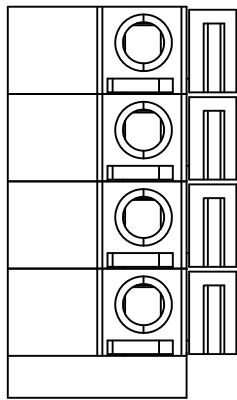
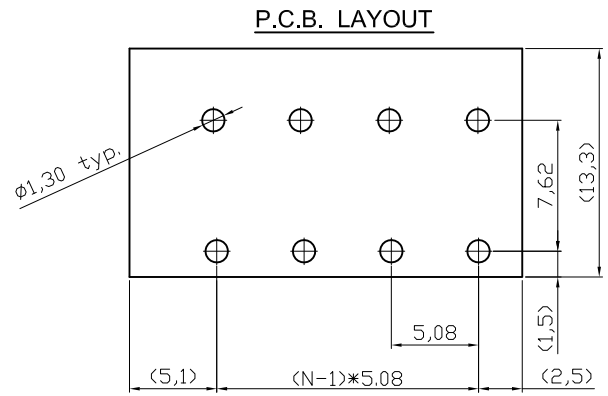
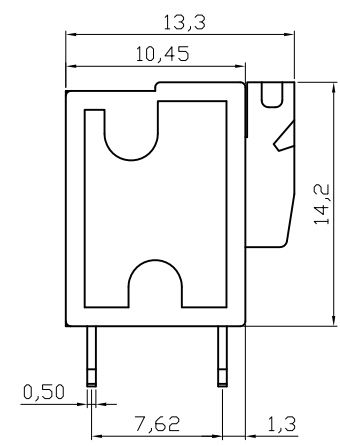
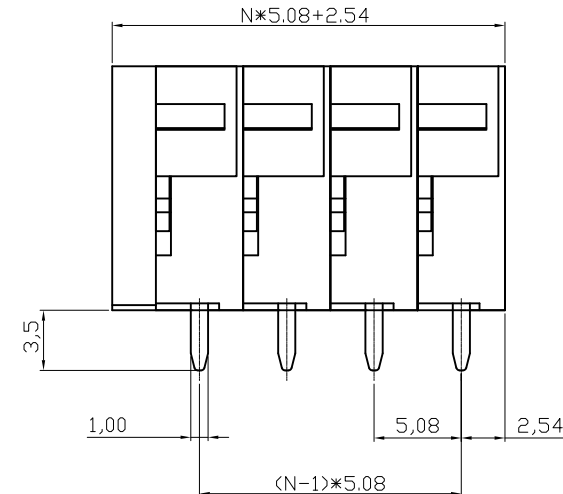


	1	2	3	4	5	6	7																																																																										
A	 P.C.B. LAYOUT  $\phi 1,30$ typ. $(5,1)$ $(N-1)*5,08$ $(2,5)$ $(1,5)$ $7,62$ $(13,3)$ $5,08$ N=Number of contacts  $13,3$ $10,45$ $1,3$ $7,62$ $0,50$ $14,2$  $N*5,08+2,54$ $3,5$ $1,00$ $5,08$ $2,54$ $(N-1)*5,08$ Material Terminal body (Contact pin): Brass Wire guard: Stainless steel Surface of solder tail: Tin plated Insulator (housing): Thermoplastic (UL94V-0),Green Electrical cULus/VDE Voltage rating: 300VAC/250VAC Current rating: 10A/10A Wire range: 0.75-1.5mm² Solid wire(AWG): 14-24 Stranded wire(AWG): 14-24 Pull force: Screw: Wire strip length: 6-7mm Withstanding Voltage: 1.6KV/2KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 							A																																																																									
B								B																																																																									
C								C																																																																									
D								D																																																																									
E								E																																																																									
F								F																																																																									
G	RoHS compliant <table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>N.Schulz</td><td colspan="2"></td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="6">28.06.2010</td><td rowspan="3">Hellwig</td><td rowspan="3">ASSMANN WSW-No. A-TB508 - HAxxV</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>②</td><td>Update</td><td>28.06.2010</td><td>Alex</td><td rowspan="3"></td><td colspan="2" rowspan="3">Drawing-No.</td><td rowspan="4">ASS 2466 CO rev02</td></tr><tr><td>X.°</td><td>±1°</td><td>①</td><td>Drawn</td><td>23.01.2008</td><td>N.Schulz</td></tr><tr><td>X.X°</td><td>±X°</td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2">Replace</td><td colspan="2">Sheet</td></tr></table>	Scale	1:1						Date	Name	Customer-No.		TOLERANCE							Drawn	N.Schulz			X.	±0.50						Approved	28.06.2010	Hellwig	ASSMANN WSW-No. A-TB508 - HAxxV	X.X	±0.30						X.XX	±0.10						DIM	TOL	②	Update	28.06.2010	Alex		Drawing-No.		ASS 2466 CO rev02	X.°	±1°	①	Drawn	23.01.2008	N.Schulz	X.X°	±X°					Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet		G
Scale	1:1						Date	Name	Customer-No.																																																																								
TOLERANCE							Drawn	N.Schulz																																																																									
X.	±0.50						Approved	28.06.2010	Hellwig	ASSMANN WSW-No. A-TB508 - HAxxV																																																																							
X.X	±0.30																																																																																
X.XX	±0.10																																																																																
DIM	TOL	②	Update	28.06.2010	Alex		Drawing-No.		ASS 2466 CO rev02																																																																								
X.°	±1°	①	Drawn	23.01.2008	N.Schulz																																																																												
X.X°	±X°																																																																																
Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet																																																																									
H									H																																																																								
	1	2	3	4	5	6	7																																																																										