



## UNIQUE SILICONE GEL OFFERS COMPLIANCY, THERMAL RESISTANCE

Tflex™ 300, at pressures of 50psi, will deflect to over 50% the original thickness. This high rate of compliancy allows the material to “totally blanket” the component, enhancing thermal transfer. The material has a very low compression set enabling the pad to be reused many times.

Tflex™ 300, in achieving its stellar compliancy, does not sacrifice thermal performance. With a thermal conductivity of 1.2 W/mK, low thermal resistances can be achieved at low pressures.

Tflex™ 300-H is offered with a hard, metallized liner option for easy handling and improved rework. The metallized liner's lower coefficient of friction also allows for easy assembly of parts that must slide together, such as a card into a chassis.

Tflex™ 300-TG is offered with a cut-through resistant Tgard™ silicone liner. The TG liner offers a guaranteed dielectric barrier, and easier part handling for mass production.

## FEATURES AND BENEFITS

- Extreme compliancy allows material to “totally blanket” component(s)
- Thermal conductivity of 1.2 W/mK
- Available in thicknesses from 0.020” - 0.200” (.5mm – 5.0mm)
- Low compression set enables the pad to be reused many times

## APPLICATIONS

- Notebook and desktop computers
- Telecommunication hardware
- Flat panel displays
- Memory modules
- Power conversion equipment
- Set top box
- Lighting ballast
- Automotive electronics
- LED lighting
- Handheld electronics
- Optical disk drives
- Vibration dampening



## global solutions: local support.™

Americas: +1.888.246.9050  
Europe: +49.(0).8031.2460.0  
Asia: +86.755.2714.1166

CLV-customerservice@lairdtech.com  
[www.lairdtech.com/thermal](http://www.lairdtech.com/thermal)

## TFLEX™ 300 TYPICAL PROPERTIES

	TFLEX™ 300	TEST METHOD
Construction	Filled silicone elastomer	NA
Color	Light green	Visual
Thermal Conductivity	1.2 W/mK	ASTM D5470
Hardness (Shore 00)	27 (at 3 second delay)	ASTM D2240
Density	1.78 g/cc	Helium Pycnometer
Thickness Range	0.020" - .200" (0.5 - 5.0mm)*	
Thickness Tolerance	±10%	
UL Flammability Rating	94 V0	UL
Temperature Range	-40°C to 160°C	NA
Volume Resistivity	10 <sup>13</sup> ohm-cm	ASTM D257
Outgassing TML	0.56%	ASTM E595
Outgassing CVCM	0.10%	ASTM E595
Coefficient Thermal Expansion (CTE)	600 ppm/C	IPC-TM-650 2.4.24

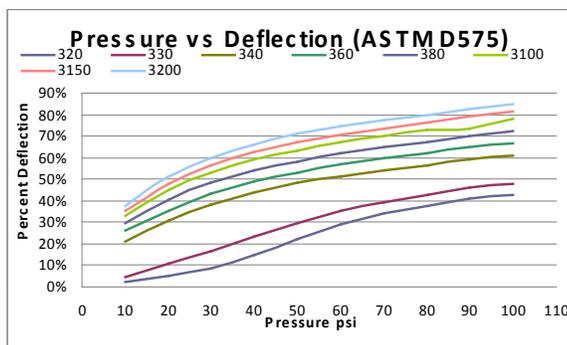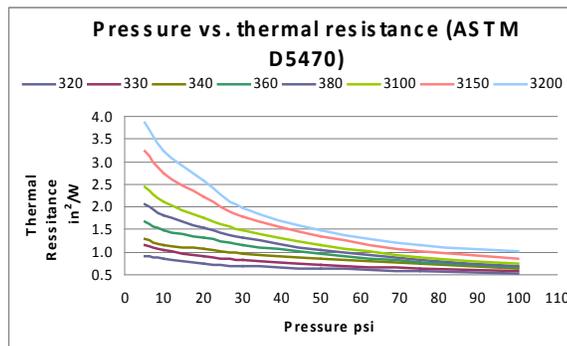

## STANDARD THICKNESSES

0.020 to 0.200-inch (0.5 to 5.0mm)\*  
 0.020 to 0.200-inch thick material available in 0.010-inch (0.25mm) increments  
 0.250-inch (6.4 mm) also available with TG liner option only.  
 \*Inquire about availability of material and options above 0.200-inches

## OPTIONS

Tgard™ "TG" dielectric barrier available to aid in handling and PET dielectric "H" liner available for applications where easy slide assembly is desirable

## MATERIAL NAME AND THICKNESS

Tflex™ indicates elastomeric gap filler product line  
 3xxx indicates high recovery '3 series' 1.2 W/mK material  
 -DC1 designates proprietary tack eliminated coating  
 -TG indicates Tgard™ liner option  
 -H indicates hard PET liner option

## EXAMPLES

Tflex™ 3120 = standard 0.120-inch thick Tflex™ 300 material  
 Tflex™ 3120DC1 = 0.120-inch thick material with DC1 coating  
 Tflex™ 3120TG = 0.120-inch thick material with Tgard™ liner  
 Tflex™ 3120H = 0.120-inch thick material with hard PET liner

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Laird Technologies:

[A15324-01](#) [A15328-01](#) [A15330-02](#) [A15330-01](#) [A15330-03](#) [A15973-10](#) [A15331-01](#) [A15332-03](#) [A15198](#) [A15333-01](#) [A15334-01](#) [A15334-03](#) [A15973-14](#) [A15335-01](#) [A15336-01](#) [A15336-03](#) [A15973-16](#) [A15337-01](#) [A15338-01](#) [A15748-01](#) [A15339-01](#) [A15322-02](#) [A15322-01](#) [A15340-01](#) [A15340-03](#) [A15973-20](#) [A15973-01](#) [A15323-02](#) [A15324-02](#) [A15324-03](#) [A15973-02](#) [A15973-05](#) [A15325-02](#) [A15325-04](#) [A15326-02](#) [A15326-03](#) [A15327-02](#) [A15327-01](#) [A15327-03](#) [A15328-02](#) [A15328-03](#) [A15973-03](#) [A15973-08](#) [A15329-02](#) [A15329-01](#) [A15326-01](#) [A15332-01](#) [A15329-03](#) [A15331-03](#) [A15333-03](#) [A15335-03](#) [A15344-02](#) [A15345-02](#) [A15780-00](#) [A15348-02](#) [A15342-01](#) [A15343-01](#) [A15344-01](#) [A15345-01](#) [A15346-01](#) [A15347-01](#) [A15348-01](#) [A15349-01](#) [A15350-01](#) [A15356-01](#) [A15358-01](#) [A15360-01](#) [A15973-04](#) [A15973-22](#) [A15973-23](#) [A15323-01](#) [A15325-01](#) [A15710-18](#) [A17156-20](#) [A17156-04](#) [A17157-14](#) [A17157-20](#) [A17157-06](#) [A17157-04](#) [A17156-10](#) [A17156-18](#) [A17157-16](#) [A17156-16](#) [A17156-06](#) [A17157-12](#) [A17156-08](#) [A17156-14](#) [A17157-10](#) [A17156-12](#) [A17157-08](#) [A17157-18](#)