


A177


- 1 Assumes a heatsink thermal resistance of less than 2.0°C/watt.
2 Non-repetitive voltage and current ratings, as contrasted to repetitive ratings, apply for occasional or unpredictable overloads. For example, the forward surge current ratings are non-repetitive ratings that are used in fault coordination work.
3 Assumes a heatsink thermal resistance of less than 1.0°C/watt.
4 "Pic-Pac" is an acronym for Pressure Internal Contact Package. 577

DEVICE SPECIFICATIONS


A177

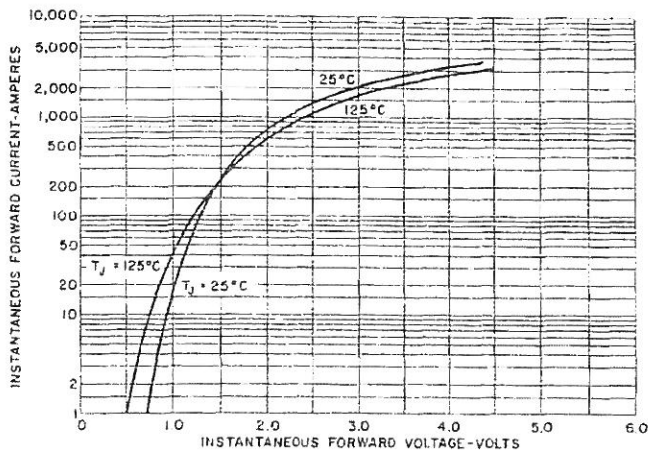


1. MAXIMUM FORWARD CHARACTERISTICS

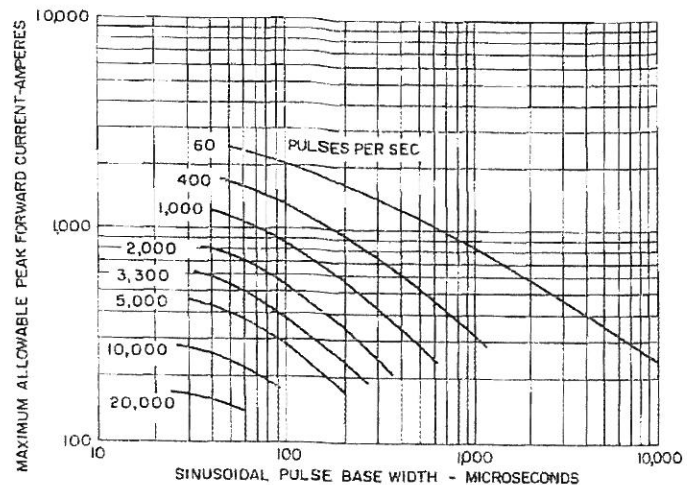


2. MAXIMUM ALLOWABLE PEAK FORWARD CURRENT
SINUSOIDAL WAVEFORM ($T_C = 65^\circ\text{C}$)

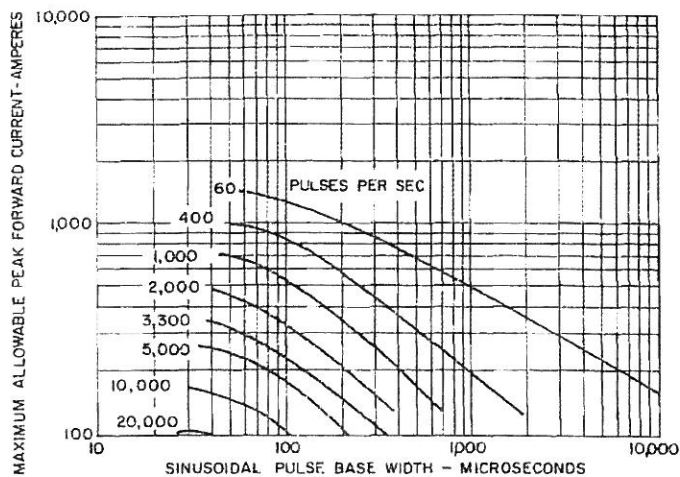


3. MAXIMUM ALLOWABLE PEAK FORWARD CURRENT
SINUSOIDAL WAVEFORM ($T_C = 90^\circ\text{C}$)

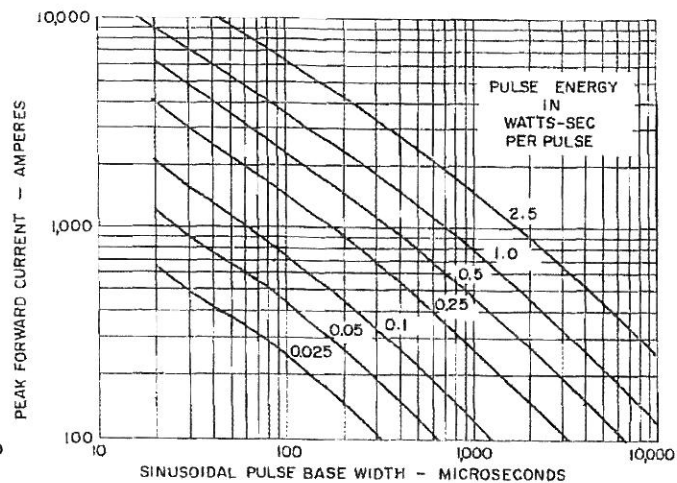

4. SINUSOIDAL PULSE ENERGY ($T_C = 125^\circ\text{C}$)

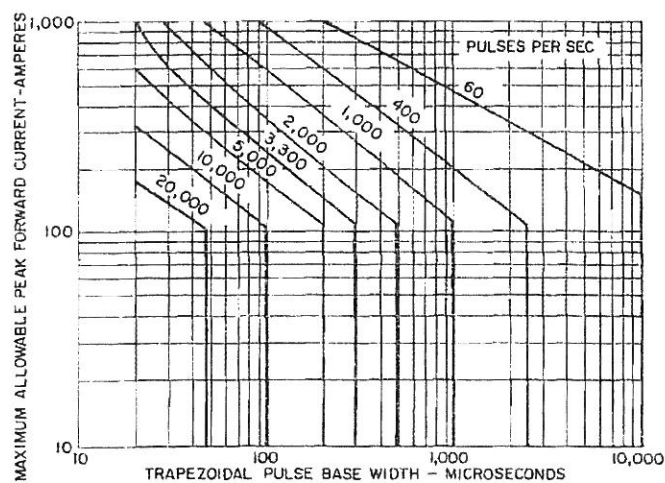


5. MAXIMUM ALLOWABLE PEAK FORWARD CURRENT, TRAPEZOIDAL WAVEFORM
($T_C = 65^\circ\text{C}$), DI/DT
(RISING & FALLING) = 100 A/ μS

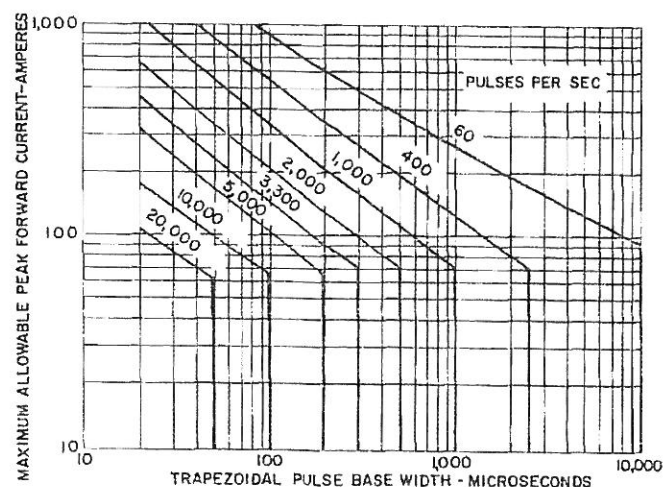


6. MAXIMUM ALLOWABLE PEAK FORWARD CURRENT, TRAPEZOIDAL WAVEFORM
($T_C = 90^\circ\text{C}$), DI/DT
(RISING & FALLING) = 100 A/ μS

DEVICE SPECIFICATIONS


A177

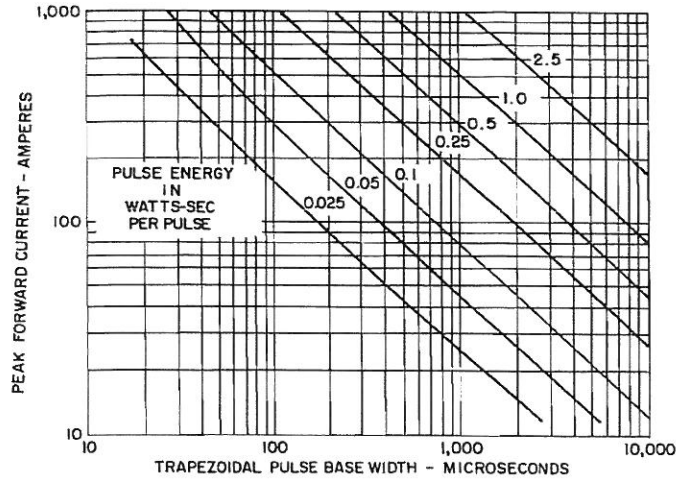


7. TRAPEZOIDAL PULSE ENERGY
DI/DT (RISING & FALLING) = 100 A/ μ S

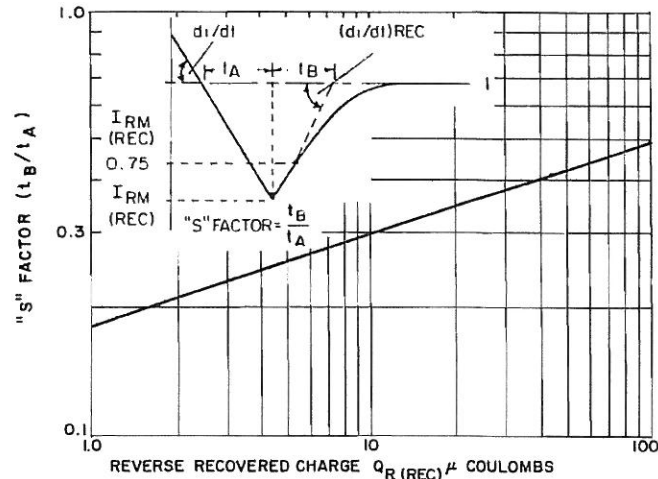


9. TYPICAL "S" FACTOR VERSUS REVERSE RECOVERED CHARGE ($T_J = 125^\circ\text{C}$)

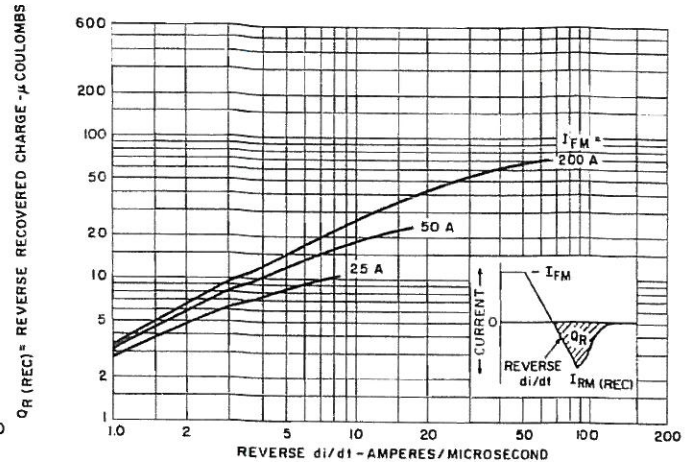

8. RECOVERED CHARGE ($T_J = 125^\circ\text{C}$)
(Maximum Recovered Charge Group 12)
If maximum recovered charge group 12 is required, request A177 X9, e.g. A177BX9, A177RBX9, etc.

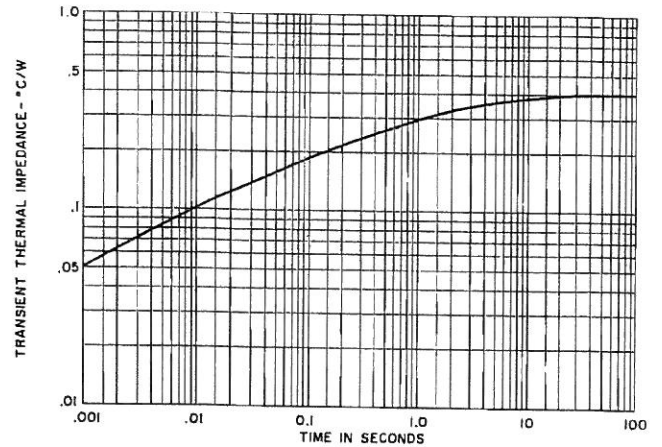


10. TRANSIENT THERMAL IMPEDANCE - JUNCTION-TO-CASE

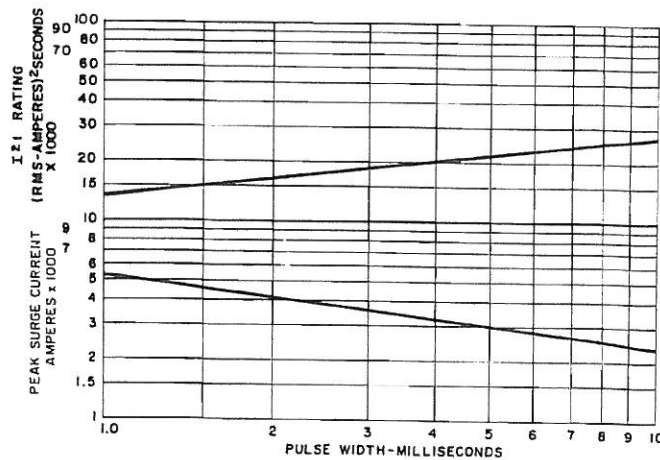

11. SUB-CYCLE SURGE FORWARD CURRENT AND I^2t RATING VERSUS PULSE TIME FOLLOWING RATED LOAD CONDITIONS

OUTLINE DRAWING

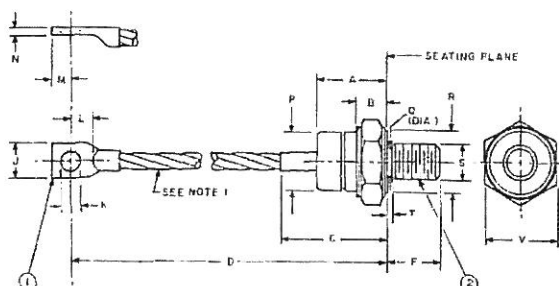

MODEL	TERMINAL 1	TERMINAL 2	S THREAD SIZE	F THREAD LENGTH	Q RELIEF DIAMETER
A177 FORWARD POLARITY	ANODE	CATHODE	3/8 - 24	.640 .610 IN.	.373 .344 IN.
A177R REVERSE POLARITY	CATHODE	ANODE	UNF - 2A	16.26 15.49 MM	9.47 8.74 MM

TABLE OF DIMENSIONS
Conversion Table

SYM.	DECIMAL INCHES		METRIC MM.		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	1.020	1.140	25.90	28.96	
B	.390	.500	9.90	12.70	
C	1.570	1.750	39.87	44.45	
D	4.345	4.745	110.36	120.52	
J	.500	.625	12.70	15.20	
K	.259	.261	6.57	7.14	
L	.320	—	8.12	—	
M	.280	.320	7.11	8.13	
N	.060	.090	1.52	2.29	
P	.840	.910	21.33	23.11	
R	.920	—	23.36	—	3
T	—	.060	—	1.52	4
V	1.052	1.063	26.72	27.00	

NOTES:


1. Flexible Copper Lead, 3/16 Inch Nominal Diameter.
2. One Nut and One Lockwasher Supplied With Each Unit. Material of Hardware is Steel Cad Plated.
3. "R" Dimension is Diameter of Effective Seating Area.
4. "T" Dimension is Area of Unthreaded Portion. Complete Threads are Within 2.5 Threads of Seating Plane.
5. Angular Orientation of Terminals is Undefined.
6. Approximate Weight: 105 Grams.

MOUNTING INSTRUCTIONS

Following these installation instructions will result in a rectifier diode-to-heatsink contact thermal resistance of 0.10°C/watt or less.


1. Be sure mounting surface is clean and flat within .001 inch/inch.
2. Mounting hole diameter should not exceed the outside diameter of the rectifier diode stud by more than 1/16 inch, and should be deburred.
3. Use Dow Corning's DC3, 4, 340 or 640 or GE G322L or equivalent, on mounting surfaces that come in contact with the heatsink.
4. Use only hardware furnished with each rectifier diode.
5. Tighten with a torque wrench, from nut side, to 100 lb-in max.

5.2 Condensed Electrical and Thermal Characteristics and Ratings

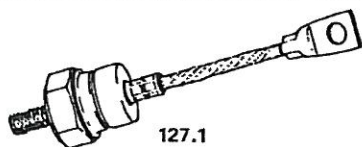

127.1

RECTIFIERS 20 TO 100 AMPERES



123



128

JEDEC TYPE	—	—	1N3289-96	1N3289A-96A	—
GE TYPE	A44	A139	—	A170	A177

SPECIFICATIONS

I _{FM(AV)}	Max. average forward (1 phase operation)		20	25	100	100	100
	T _C = (°C)		110	75	130	130	65
V _{RM} (Rep)	Max. repetitive peak reverse voltage (V)		50-600	50-1000	200-1200	100-1500	100-1500
I _{FM} (Surge)	Max. peak one cycle, non-recurrent surge current (1 phase operation) 50 Hz.		270	360	1440	2250	2250
	@ max. rated load conditions (A) 60 Hz.		300	400	1600	2500	2500
I ² _t	Max. non-repetitive for 1.5 msec (A ² sec)		100	500	4000	5500	15000
T _J	Operation junction temperature range (°C)		-65 to 175	-40 to 125	-40 to 200	-40 to 200	-40 to 125
R _{θJC}	Max. thermal resistance, junction-to-case (°C/W)		1.5 TYPICAL	1.0	.4	.4	.4
V _{FM}	Max. peak forward voltage drop @ rated I _{F(AV)} (1 phase operation)		1.0 TYPICAL	1.0	1.4	1.3	1.3
	@ T _C = (°C)		25	75	25	130	25
Q _{R(REC)}	Reverse recovered charge @ rated T _J (μc)		—	—	—	—	50
t _{rr}	Reverse recovery time @ rated T _J (μs)		—	0.5	—	—	2.3
V _F	Max. forward ⁽¹⁾ voltage drop for the current range:	I _{MIN} (A)	.2	.8	2	1	3
		I _{MAX} (A)	200	800	2000	1000	3000
		A	.38	.6702	.4283	.4290	.4405
		B	.0352	-.0094	-.0099	.1008	.1163
		C	.0082	-.0008	.0002	.0011	.0007
		D	.0559	.1434	-.0553	-.0008	.0172
R _{θJC}	Transient thermal ⁽²⁾ resistance for time:	T _{MIN} (S)	—	—	.001	.001	.001
		T _{MAX} (S)	—	—	.01	.01	.01
		F	—	—	.4	.4	.4
		G	—	—	.3	.3	.3
Package Outline No.			126	123	127.1	127.1	127.1
Maximum Stud Torque (In-Lbs/N-M)			—	30/3.39	100/11.3	100/11.3	100/11.3
Expanded Electrical Characterization, see page:			N.A.	N.A.	N.A.	N.A.	N.A.

⁽¹⁾Voltage Drop Model: $V_F = A + B \cdot L_N(I) + CI + D\sqrt{I}$

⁽²⁾Transient Thermal Resistance Model: $R_{\theta JC} = F \cdot t^G$

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com