




Sealed Rotary DIP Switch A6C/A6CV

Highly Reliable Subminiature DIP Switch

- A precise rotary cam and contact driving mechanism achieve compactness for high-precision mounting.
- Top-actuated and side-actuated models included in series.
- Insert-molded terminals and an O-ring sealed rotor combine to form a sealed construction equivalent to IP64 (IEC 60529) that prevents flux penetration and provides high contact reliability even in dusty locations and locations where water is used.
- Offset between terminal pins and side of case allows simple circuit inspection
- RoHS Compliant

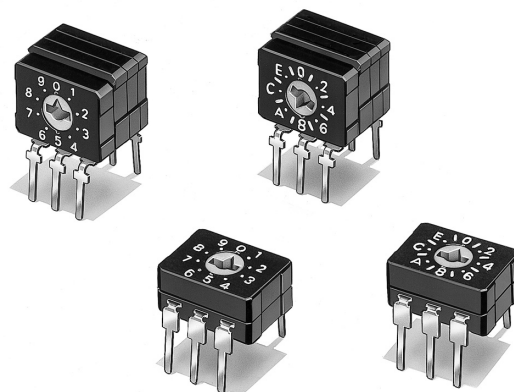

Ordering Information

		Part numbers	
		Top actuated	Side actuated
			
Output code	No. of positions		
BCD 1-2-4-8	10	A6C-10R(N)	A6CV-10R
BCD Hexadecimal 1-2-4-8	16	A6C-16R(N)	A6CV-16R

Important Note: Switches cannot be water-washed.

Specifications


■ Characteristics

Switching capacity		100 mA at 30 VDC
Minimum Permissible load		10 μ A at 3.5 VDC min.
Contact resistance		200 M Ω max.
Insulation resistance		100 M Ω min. (at 250 VDC)
Dielectric strength		250 VAC for 1 minute between terminals
Operating torque		100 g·cm (0.98 x 10 ⁻² N·m) max.
Vibration resistance	Malfunction durability	10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Malfunction durability	300 m/s ² (30 G) min.
Ambient operating temperature		-20° to 70°C at 60% RH max. (with no icing or condensation)
Ambient operating humidity		35% to 95% RH (at 5 to 35°C)
Service life	Mechanical	10,000 detent operations min.
	Electrical	2,000 detent operations min.
Weight		Top-actuated: Approx. 0.4 g Side-actuated: Approx. 0.8 g

Note: Data shown are of initial value.

Construction

The movable contactor is moved as the rotor rotates. The terminals are insert molded into the base. The rotor is secured by an O-ring and the case and the cover are made of plastic resin. Therefore, the internal mechanism is effectively sealed.

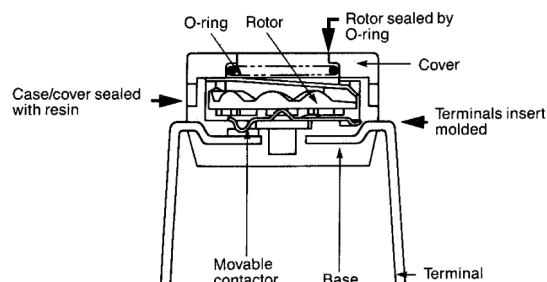

Output Codes

10-position Models

Type Terminal No. Position	BCD 1-2-4-8			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

16-position Models

Type Terminal No. Position	BCD/hexadecimal 1-2-4-8			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●
A		●		●
B	●	●		●
C			●	●
D	●		●	●
E		●	●	●
F	●	●	●	●


Note: "●" indicates that the internal switch is ON.

Dimensions

- Note: 1. All units are in millimeters unless otherwise indicated.
2. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.


Top Actuated, 10 Positions

A6C-10R (N)

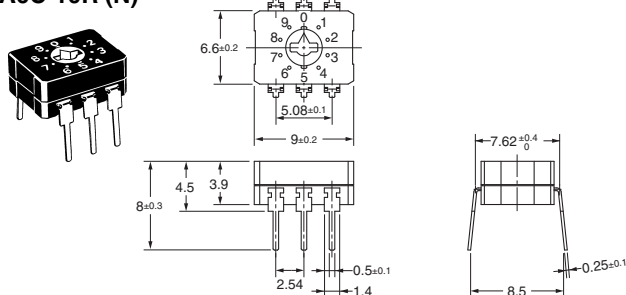


Top Actuated, 16 Positions

A6C-16R (N)

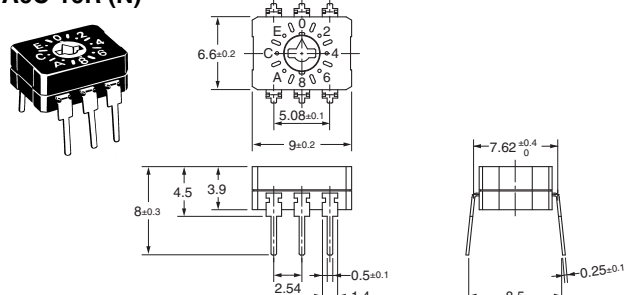


Side Actuated, 10 Positions

A6CV-10R

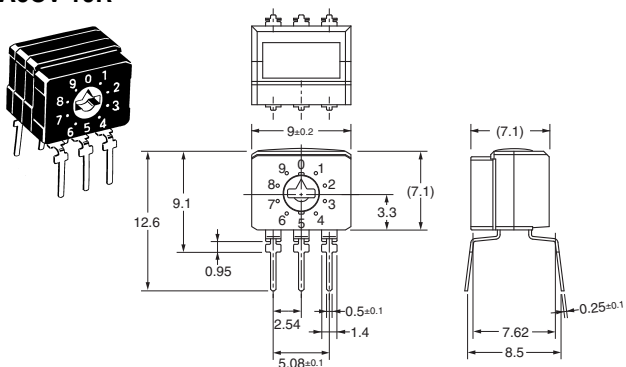


Side Actuated, 16 Positions


A6CV-16R

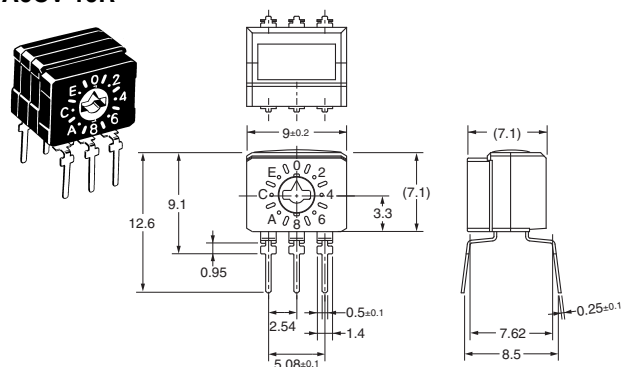


Terminal arrangement
(bottom view)



Mounting holes
(Top view)

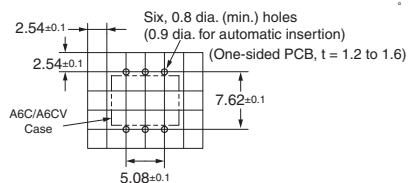

Internal connections
(top view)



All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[A6C-16R\(N\)](#) [A6C-10R\(N\)](#) [A6CV-16R](#) [A6CV-10R](#)