


- 1.0 MATERIALS:
- 1.1 HOUSING: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B194.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
- 2.0 PLATING:
- 2.1 HOUSING: PASSIVATED PER MIL-F-14072
 - AND QQ-P-35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.
- 2.3 7MM NUT: ELECTROPOLISH (BRIGHT POLISH)
- 3.0 ELECTRICAL SPECIFICATION:
- 3.1 FREQUENCY RANGE: DC to 18.0 GHz
- 3.2 VSWR (MAXIMUM): 1.025+0.0025f(GHz)
- 4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS

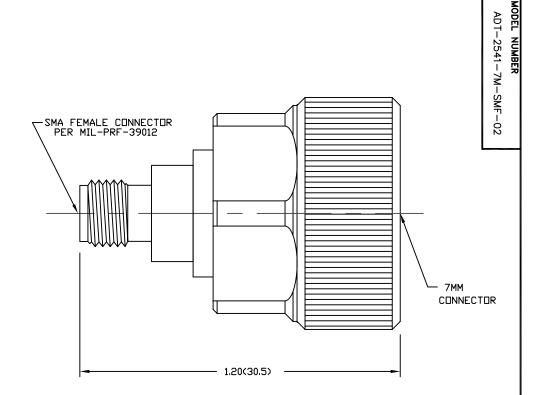

DWG NO. WAS: 02383-01-00

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. _ CONCENTRICITY: T.I.R.

ANGLES AND PERPENDICULARITY: ±1

MIDWEST MICROWAVE TITLE



A.BEATTY 3/30/92 ENG./DATE A.OSGA 4/15/92 CHECKED/DATE

ADAPTER OUTLINE DRAWING

SCALE:

DRAWING NUMBER REV. ADT-2541-7M-SMF-02-01

SHEET 1

5=1

D1

of 1

DESCRIPTION REDRAW ON ECR 5483 ECR 6545 ECN 16123 RELEASED ပ 리 œ

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions:

ADT-2541-7M-SMF-02