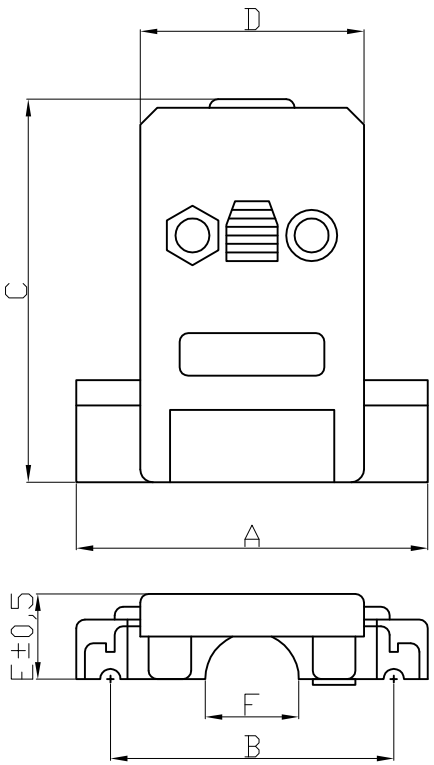

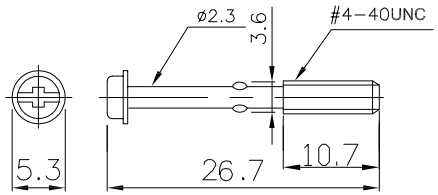

⑤ **09,15,25,37,50 Pin**

SPECIFICATION
MATERIAL
Features

The hood consists of two pieces with straight cable entry.The strain relief is inside.After assembly the screws with UNC4-40 thread are secured.

Instead of the short screws, long thumb screws are separately svailable.

Order Code

AGP - XX - G
1

No. of contacts
09, 15, 25, 37,50

Suitable knurled screws
AGP-RS/G
1Set=2pieces

Dimensions						
No.of contacts	A	B	C	D	E	F
09	33.0	25.0	45.0	18.0	10.0	7
15	41.3	33.3	45.0	26.3	10.5	10
25	55.0	47.0	45.0	40.0	10.4	10
37	72.5	63.5	45.0	56.5	10.5	14
50	69.5	61.4	44.7	54.3	9.6	14

④ **Material**
ABS
Delivery includes
2 half-sheels
2 fixing screws
4 screws
2 strain relief bow
2 nuts

RoHS compliant

Scale	1:1
TOLERANCE	
X.X	±X
X.XX	±X
X.XXX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name		Date	Name
⑤	Add the screw dimension	17.09.2013	Winnie	Drawn	12.01.2005	Ken
④	Corrected material	14.12.2010	Dean	Approved	17.09.2013	Winnie
③	Added 50 poles	28.12.2009	Dean			
②	Zeichnung überarbeitet	09.07.2007	N.Schulz			
①	Drawn	12.01.2005	Ken			

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AGP xx G

Drawing-No.
ASS 0293 CO

rev05

Replace

Sheet