



SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	3 ~ 20	Vdc
RATED CURRENT (MAX)	10	mA
MINIMUM SPL @ 10 cm.	98	dBa
RESONANT FREQUENCY	2,800±500	Hz
TONE OR PULSE RATE	SLOW PULSE	1.5 PULSE PER SECOND
OPERATING TEMPERATURE	-30 ~ +85	°C
STORAGE TEMPERATURE	-40 ~ +95	°C
HOUSING MATERIAL	ABS	—
TERMINAL MATERIAL	LEAD WIRE	—
WEIGHT	14.2	grams

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	6/10/03	
A	REVISED TO NEW TEMPLATE	5/7/04	R. W.
B	REVISED SOUND EMISSION HOLE DIA.	10/14/05	E. P.

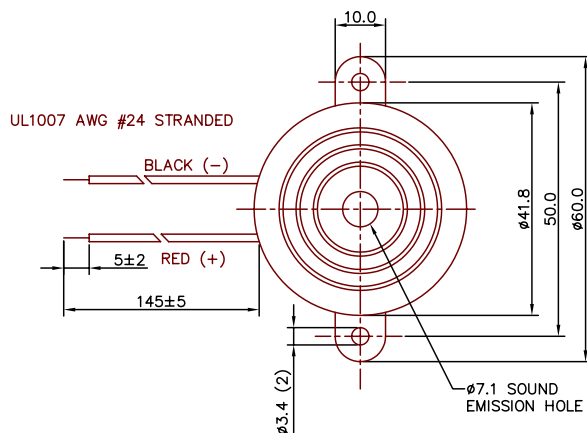

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE
OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AI-435.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ± 0.5 AND
ANGLES ARE $\pm 3^\circ$.

APPROVALS	DATE
DRAWN <i>T.P.I.</i>	6/03
APPROVED <i>S.J.</i>	6/03
<i>E.P.</i>	10/05



projects®
unlimited

Dayton , Ohio

AUDIO INDICATOR
AI-435

SIZE	A
------	---

DRAWING NO.
AI-435

DO NOT SCALE DRAWING

SCALE: N.T.S.

SHEET 1 OF 1