

AIQ02R300-L

65 Watts

Data Sheet

Total Power: 65 Watts
(28 V @ 2.32 A)
Input Voltage: 390 V
of Outputs: Single

SPECIAL FEATURES

- 65 W Continuous power at 100°C baseplate temperature
- High efficiency: up to 90%
- Low output ripple and noise
- Positive Enable function
- Excellent transient response
- Safety isolated low voltage control and monitoring
- High reliability
- Wide input voltage range
- Adjustable output voltage
- Regulation to zero load
- EU Directive 2002/95/EC compliant for RoHS

SAFETY

- UL cUL 60950 Recognized
- TUV EN60950 Licensed
- CE CE Mark



Electrical Specifications

Input	
Input Range:	250 - 420 VDC
Input Surge:	500 V / 100 ms
Efficiency:	90% @ 28.0 V 65 W (typical)
Isolation Voltage:	2500 VDC
Output	
Line Regulation:	0.2 % typical
Load Regulation:	0.2 % typical
Noise / ripple:	3% Vo,
Transient response:	5% Vo deviation with 100% to 80% full load @ 0.1 A / μ S
Overvoltage protection:	30 - 31.5 V
Current limit:	130% Io maximum
Control	
Output Voltage Adjust:	90% - 105% (via external trim resistor)
Enable:	TTL compatible (positive enable logic)


Environmental Specifications

Operating ambient temperature range:	-40 °C to +100 °C (baseplate temperature)
Storage temperature:	-55 °C to +125 °C (environment temperature)
Overtemperature protection:	120 °C max
Demonstrated MTTF (Telcordia SR-332)	4.15Mhrs

Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
390 V	28 V @ 2.32 A	89% typ	AIQ02R300-L

Mechanical Drawings

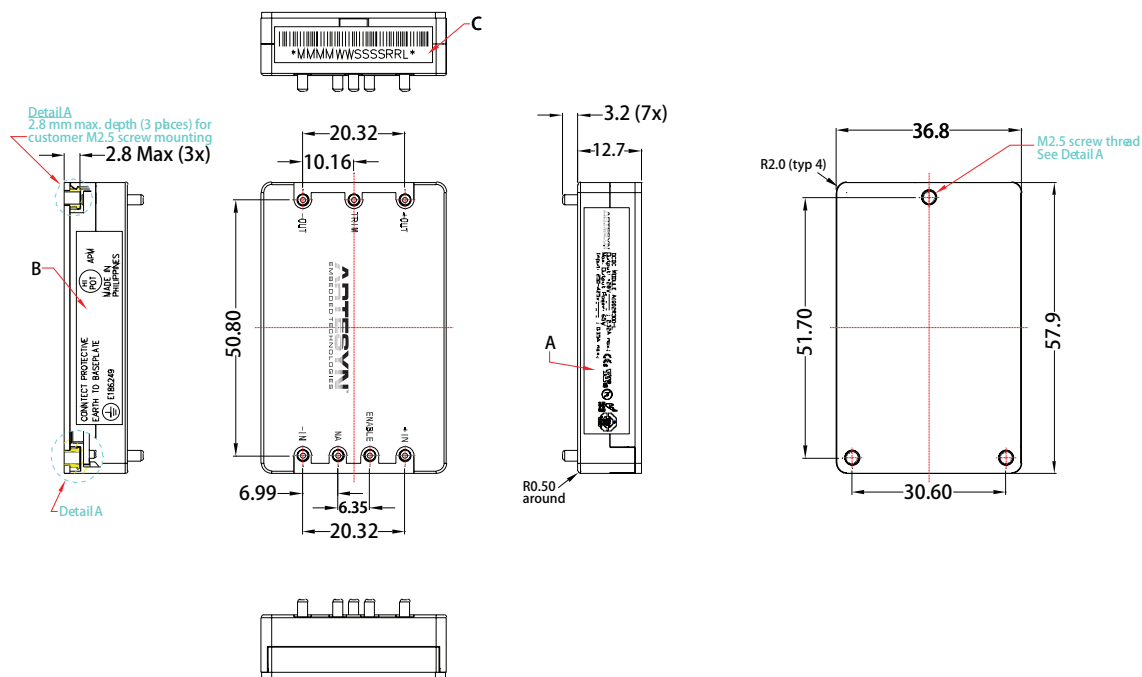

Converter Pins

No.	Label
1	+In
2	Enable
3	NA
4	-In
5	-Out
6	Trim
7	+Out

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com