
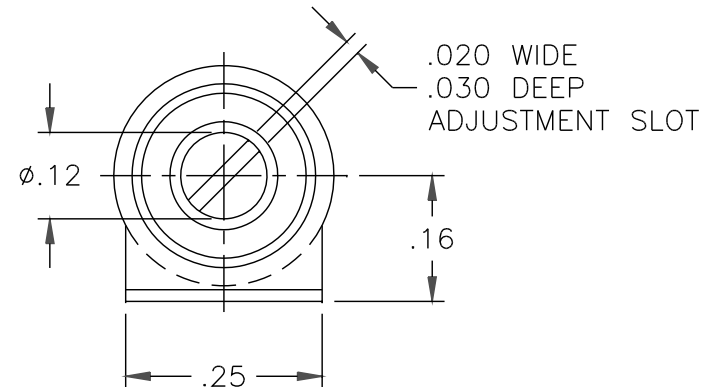


DATE	SYM	REVISION	RECORD	AUTH	DR	CK

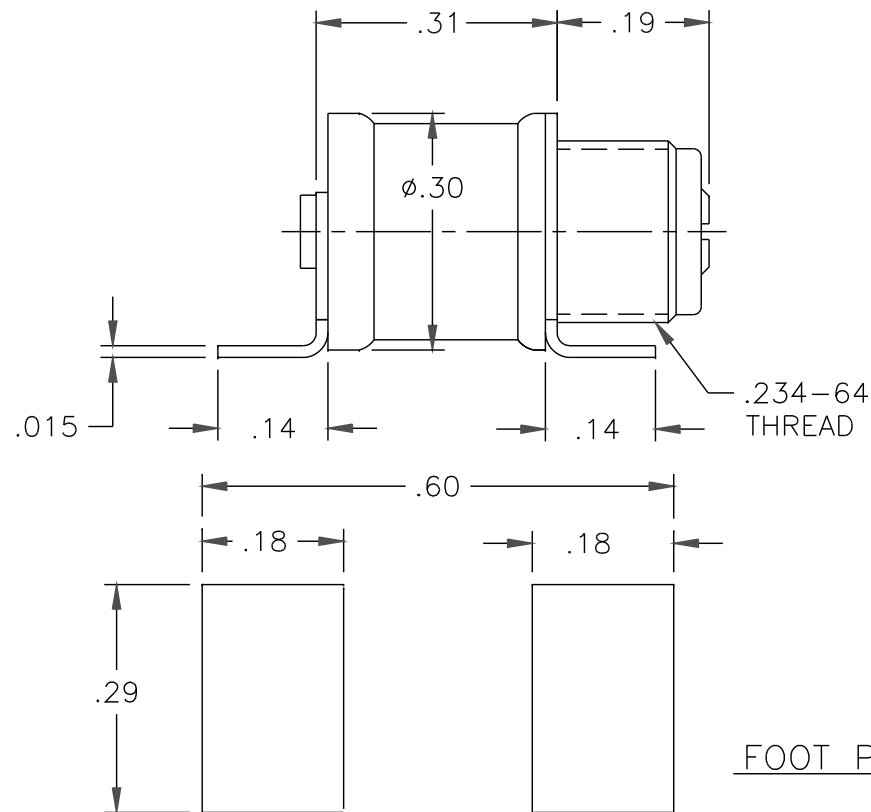

FOOT PRINT

NOTES:

1. CAPACITANCE RANGE, pF: 1.0 TO 16.0
2. DC WORKING VOLTAGE AT 16.0 pF: 1000 VDC.
3. DC WITHSTANDING VOLTAGE AT 16.0 pF: 2000 VDC.
4. Q FACTOR AT 100 MHz AND 16.0 pF: 2000
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TEMPERATURE COEFFICIENT: 50 ± 50 PPM/°C.
7. OPERATING TEMPERATURE: -65°C TO +125°C
8. TUNING TORQUE: 0.5 TO 5.0 IN-OZ
9. ROTATIONAL LIFE: 600 TURNS
10. VIBRATION: 50g AT 10-2000 Hz
11. SHOCK: 1500g, 0.5 MILLISECS.
12. SEAL: 40 PSI

TOLERANCES (EXCEPT AS NOTED)		VOLTRONICS CORPORATION 100 FORD RD. DENVILLE N.J.	
DECIMAL XXX ±.005 XX ±.016		SCALE 4 : 1	DRAWN BY A.SHTABNAYA
			APPROVED BY A.GOLDBERG
FRACTIONAL —	TITLE OUTLINE DWG. AJ15HV		
ANGULAR —	DATE 3/26/10	DRAWING NUMBER 70,910	