


Thick Film, Rectangular Chip Resistors for Conductive Gluing



FEATURES

- AgPd-Terminations for conductive gluing
- Stability $\Delta R/R = 1\%$ for 1000 h at 70 °C
- Metal glaze on high quality ceramic
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition

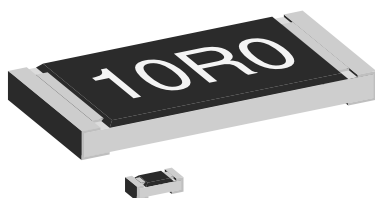

RoHS
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE		RATED DISSIPATION P_{70} W	LIMITING ELEMENT VOLTAGE $U_{max. AC/DC}$	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	SERIES
	INCH	METRIC						
D10 AP	0402	RR 1005M	0.063	50	± 100 ± 200	± 1 ± 5	100R to 10M 10R to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 0.5\text{ A}$					
D11 AP	0603	RR 1608M	0.10	75	± 100 ± 200	± 1 ± 5	18R to 10M 3R6 to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 0.7\text{ A}$					
D12 AP	0805	RR 2012M	0.125	150	± 100 ± 200	± 1 ± 5	18R to 10M 3R6 to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 0.8\text{ A}$					
D25 AP	1206	RR 3216M	0.25	200	± 100 ± 200	± 1 ± 5	18R to 10M 3R6 to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 1.0\text{ A}$					
CRCW1210-AP	1210	RR 3225M	0.50	200	± 100 ± 200	± 1 ± 5	18R to 10M 3R6 to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 1.5\text{ A}$					
CRCW1218-AP	1218	RR 3246M	1.0	200	± 100 ± 200	± 1 ± 5	18R to 2M2 3R6 to 2M2	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 2.0\text{ A}$					
CRCW2010-AP	2010	RR 5025M	0.75	400	± 100 ± 200	± 1 ± 5	18R to 10M 3R6 to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 1.8\text{ A}$					
CRCW2512-AP	2512	RR 6332M	1.0	500	± 100 ± 200	± 1 ± 5	18R to 10M 3R6 to 10M	E24; E96 E24
			Zero-Ohm-Resistor: $R_{max.} < 200\text{ m}\Omega$, $I_{max.} = 2.0\text{ A}$					

Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional time.
- Marking and packaging: See datasheet "Surface Mount Resistor Marking" (document number 20020)
- Power rating depends on the max. temperature at the joint point, the component placement density and the substrate material.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	D10 AP	D11 AP	D12 AP	D25 AP	CRCW1210-AP	CRCW1218-AP	CRCW2010-AP	CRCW2512-AP
Rated dissipation P_{70} ⁽¹⁾	W	0.063	0.1	0.125	0.25	0.5	1.0	0.75	1.0
Limiting element voltage $U_{max. AC/DC}$	V	50	75	150	200	200	200	400	500
Insulation voltage $U_{ins. (1\text{ min})}$	V	> 75	> 100	> 200	> 300	> 300	> 300	> 300	> 300
Insulation resistance	Ω	$> 10^9$							
Category temperature range	°C	- 55 to + 155							
Failure rate	h^{-1}	$< 0.1 \times 10^{-9}$							
Weight	mg	0.65	2	5.5	10	16	29.5	25.5	40.5

Note

- ⁽¹⁾ The power dissipation on the resistors generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceed.

PART NUMBER AND PRODUCT DESCRIPTION (Equal to or smaller than 1206 case size)

Part Numbering: D1208058B5620FP5⁽¹⁾

D	1	2	0	8	0	5	8	B	5	6	2	0	F	P	5		
MODEL/SIZE	SPECIAL CHARACTER				TCR		VALUE				TOLERANCE		PACKAGING		SPECIAL		
D100402 D110603 D120805 D251206	8 = AgPd terminations for conductive glueing				B = ± 100 ppm/K A = ± 200 ppm/K 0 = Jumper		3 digit value 1 digit multiplier MULTIPLIER 7 = $\times 10^{-3}$ 8 = $\times 10^{-2}$ 9 = $\times 10^{-1}$ 0 = $\times 10^0$ 1 = $\times 10^1$ 2 = $\times 10^2$ 3 = $\times 10^3$ 4 = $\times 10^4$ 5 = $\times 10^5$ 6 = $\times 10^6$ 0000 = Jumper				F = $\pm 1\%$ J = $\pm 5\%$ 0 = Jumper		P0 P5 PN PZ B5 BN		Up to 2 digits		

Product Description: D12 AP 100 562R 1 % P5

D12 AP	100	562R	1 %	P5	BVxxxxx
MODEL	TCR	RESISTANCE VALUE	TOLERANCE	PACKAGING	SPECIAL ⁽²⁾
D10 AP D11 AP D12 AP D25 AP	± 100 ppm/K ± 200 ppm/K	49K9 = 49.9 Ω 5R1 = 5.1 k Ω 0R0 = Jumper	$\pm 1\%$ $\pm 5\%$	P0 P5 PN PZ B2 B4 B5 BN	Customized part number is available on request

PART NUMBER AND PRODUCT DESCRIPTION (Equal to or larger than 1210 case size)

Part Numbering: CRCW2010562RFKB4AP⁽¹⁾

C	R	C	W	2	0	1	0	5	6	2	R	F	K	B	4	A	P
MODEL/SIZE	SPECIAL CHARACTER				TOLERANCE		TCR		PACKAGING		SPECIAL						
CRCW1210 CRCW1218 CRCW2010 CRCW2512	R = Decimal K = Thousand M = Million 0000 = Jumper				F = $\pm 1.0\%$ J = $\pm 5.0\%$ Z = Jumper		K = ± 100 ppm/K N = ± 200 ppm/K 0 = Jumper		B2 B4		Up to 2 digits AP = Conductive glueing						

Product Description: CRCW2010-AP 100 562R 1 % B4

CRCW2010-AP	200	562R	5 %	B4	BVxxxxx
MODEL	TCR	RESISTANCE VALUE	TOLERANCE	PACKAGING	SPECIAL ⁽²⁾
CRCW1210-AP CRCW1218-AP CRCW2010-AP CRCW2512-AP	± 100 ppm/K ± 200 ppm/K	10R = 10 Ω 562R = 562 Ω 10K = 10 k Ω 1M = 1 M Ω 0R0 = Jumper	$\pm 1\%$ $\pm 5\%$	B2 B4	Customized part number is available on request

Notes

⁽¹⁾ Preferred way for ordering products is by use of the PART NUMBER.

⁽²⁾ Detailed BV number will appear on the packaging label.


PACKAGING

MODEL	UNIT	PAPER TAPE ACC. IEC 60286-3, TYPE I ⁽⁴⁾		BLISTER TAPE ACC. IEC 60286-3, TYPE II	
		QUANTITY	CODE	QUANTITY	CODE
D10 AP	180 mm/7" 330 mm/13"	10 000 50 000	P0 PZ		
D11 AP	180 mm/7" 285 mm/11.25" 330 mm/13"	5000 10 000 20 000	P5 P0 PN	5000 20 000	B5 BN
D12 AP	180 mm/7" 285 mm/11.25" 330 mm/13"	5000 10 000 20 000	P5 P0 PN	5000 20 000	B5 BN
D25 AP	180 mm/7" 285 mm/11.25" 330 mm/13"	5000 10 000 20 000	P5 P0 PN	5000 15 000	B5 BN
CRCW1210-AP	180 mm/7" 285 mm/11.25" 330 mm/13"	5000 10 000 20 000	P5 P0 PN		
CRCW1218-AP	180 mm/7"			4000	B4
CRCW2010-AP	180 mm/7"			4000	B4
CRCW2512-AP	180 mm/7"			2000 4000	B2 B4

Note

(4) Flame treated paper for sizes D10 and D11. Regular paper for sizes D12 and D25.


DIMENSIONS

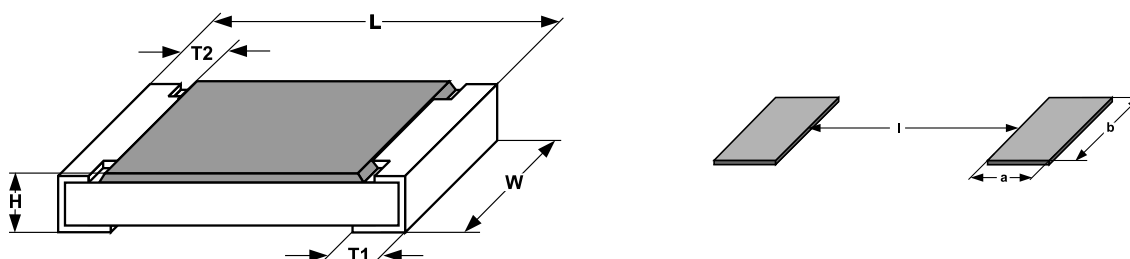


SIZE		DIMENSIONS in millimeters					GLUING PADS DIMENSIONS in millimeters		
INCH	METRIC	L	W	H	T1	T2	a	b	l
0402	1005	1.0 ± 0.05	0.5 ± 0.05	0.35 ± 0.05	0.25 ± 0.05	0.2 ^{+0.10} _{-0.15}	0.4	0.6	0.5
0603	1608	1.55 ^{+0.10} _{-0.05}	0.85 ± 0.1	0.45 ± 0.05	0.3 ± 0.2	0.3 ± 0.2	0.9	0.9	1.0
0805	2012	2.0 ^{+0.20} _{-0.10}	1.25 ± 0.15	0.45 ± 0.05	0.3 ^{+0.20} _{-0.10}	0.3 ± 0.2	0.9	1.3	1.3
1206	3216	3.2 ^{+0.10} _{-0.20}	1.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	1.1	1.7	2.3
1210	3225	3.2 ± 0.2	2.5 ± 0.2	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	0.9	2.5	2.0
1218	3246	3.2 ^{+0.10} _{-0.20}	4.6 ± 0.15	0.55 ± 0.05	0.45 ± 0.2	0.4 ± 0.2	1.05	4.9	1.9
2010	5025	5.0 ± 0.15	2.5 ± 0.15	0.6 ± 0.1	0.6 ± 0.2	0.6 ± 0.2	1.0	2.5	3.9
2512	6332	6.3 ± 0.2	3.15 ± 0.15	0.6 ± 0.1	0.6 ± 0.2	0.6 ± 0.2	1.0	3.2	5.2

FUNCTIONAL PERFORMANCE


Single Pulse

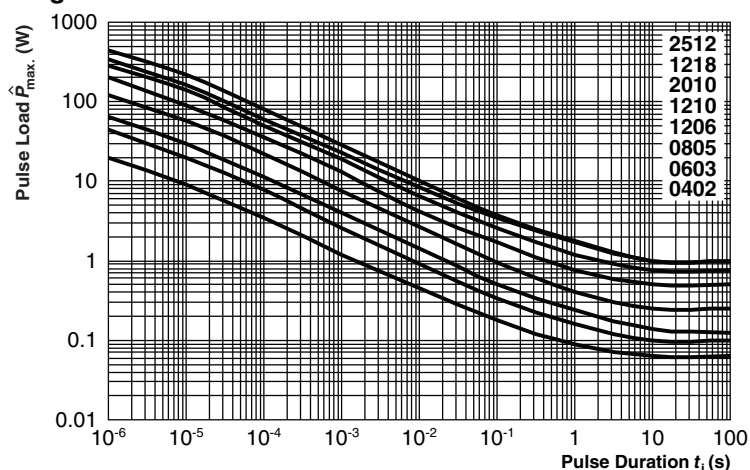


Continuous Pulse

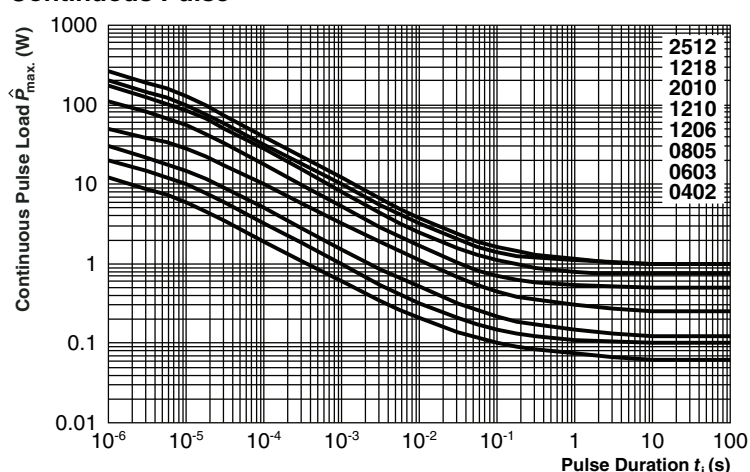


Pulse Voltage

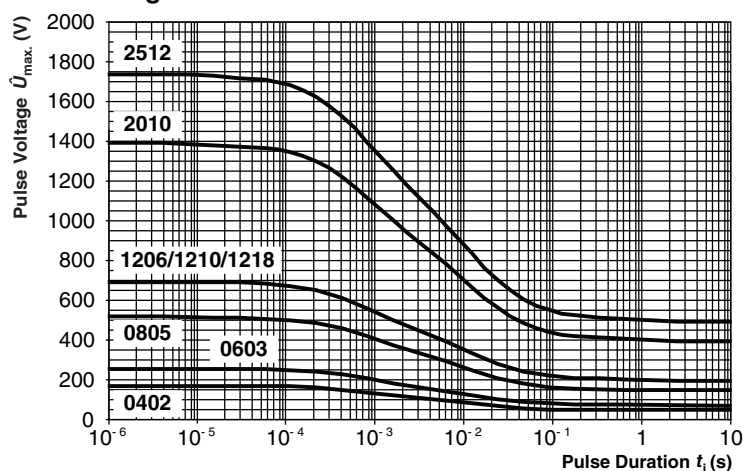


Derating

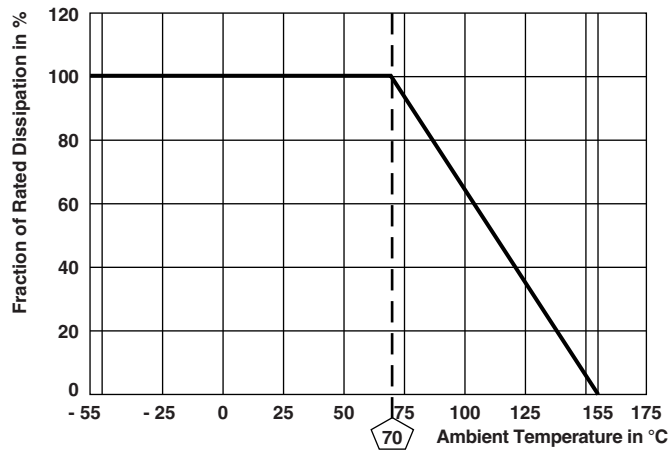

Non-Linearity

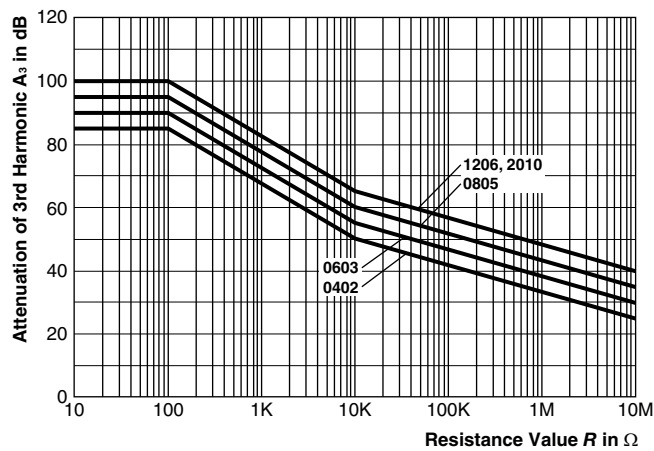

Current Noise

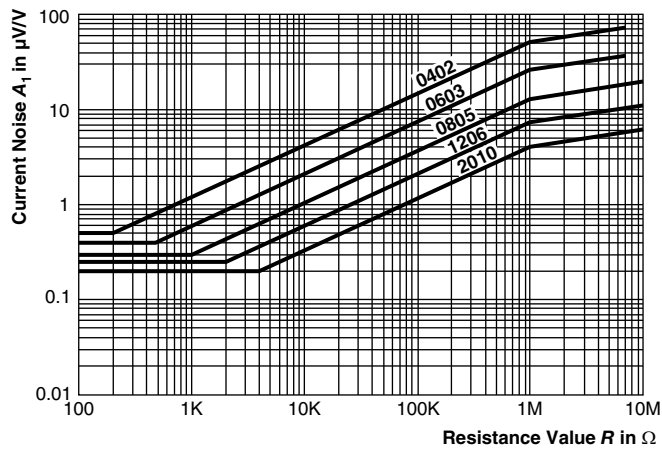

TEST PROCEDURES AND REQUIREMENTS					
EN 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)	
				STABILITY CLASS 2 OR BETTER	
			Stability for product types:	18 Ω to 10 M Ω	3.6 Ω to 10 M Ω
			D AP, CRCW-AP		
4.5	-	Resistance	-	$\pm 1 \%$	$\pm 5 \%$
4.13	-	Short time overload	$U = 2.5 \times \sqrt{P_{70}} \times R$ $\leq 2 \times U_{\max.}$; duration: Acc. to style	$\pm (0.25 \% R + 0.05 \Omega)$	
4.8.4.2	-	Temperature coefficient	(20/- 55/20) °C and (20/125/20) °C	± 100 ppm/K	± 200 ppm/K
4.19	14 (Na)	Rapid change of temperature	30 min. at - 55 °C; 30 min. at 125 °C 5 cycles 1000 cycles	$\pm (0.25 \% R + 0.05 \Omega)$ $\pm (1 \% R + 0.05 \Omega)$	
4.25.1	-	Endurance at 70 °C	$U = \sqrt{P_{70}} \times R \leq U_{\max.}$; 1.5 h on; 0.5 h off; 70 °C; 1000 h 70 °C; 8000 h	$\pm (1 \% R + 0.05 \Omega)$ $\pm (2 \% R + 0.1 \Omega)$	$\pm (2 \% R + 0.1 \Omega)$ $\pm (4 \% R + 0.1 \Omega)$
4.24	78 (Cab)	Damp heat, steady state	(40 $\pm$ 2) °C; (93 $\pm$ 3) % RH; 56 days	$\pm (1 \% R + 0.05 \Omega)$	
4.25.3	-	Endurance at upper category temperature	155 °C, 1000 h	$\pm (1 \% R + 0.05 \Omega)$	

All tests are carried out in accordance with the following specifications:

- EN 60115-1, generic specification
- EN 140400, sectional specification
- EN 140401-802, detail specification
- IEC 60068-2, environmental test procedures

Packaging of components is done in paper or blister tapes according to IEC 60286-3.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.