## NOTES:

1. MATERIALS AND FINISHES:

BODY - BRASS (ASTM-B16 HO2, C36000), NICKEL PLATING CONTACT PIN - PHOSPHOR BRONZE, GOLD PLATING INSULATOR - PTFE PER ASTM D 1710 OR EQUIV.

2. ELECTRICAL:

A. IMPEDANCE:


50 OHM DC - 300 MHz B. FREQUENCY RANGE:


3. MECHANICAL:

A. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, APH-BNCP-UHFJ, AND DATE CODE



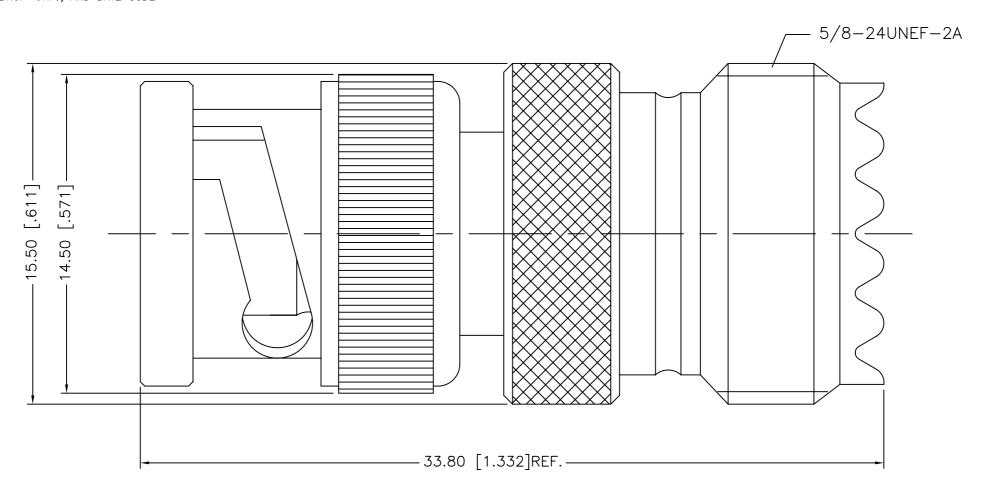

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

MATERIAL	DRAWN	DATE
	C. McGRATH	4/28/05
	ENGINEER	DATE
	O. BARTHELMES	4/28/05
REFERENCE	APPROVED	DATE
	O. BARTHELMES	9/8/06
		-

H:\DEPT611\ASSY\APH\BNCP-UHFJ

CAD FILE

BNC MALE TO UHF FEMALE **ADAPTER** 

В

Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A. 06810

SCALE: 2:1 SHEET

DWG SIZE CODE ID 74868

ISSUE DRAWING NO. APH-BNCP-UHFJ Α

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

APH-BNCP-UHFJ