

RoHS Compliant

Commercial USB *Flash Drive*

AH162-A Product Specification

October 13, 2015

Version 1.3



Apacer
Access the best

Apacer Technology Inc.

1F, No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City, Taiwan, R.O.C

Tel: +886-2-2267-8000 Fax: +886-2-2267-2261

www.apacer.com

Table of Contents

1. General Descriptions	2
2. Features	2
3. Performance.....	3
4. Power consumption	3
5. Operating Range	4
6. Dimensions.....	4
7. Product Ordering Information	5
7.1 Product Code Designations	5
7.2 Valid Combinations	6

1. General Descriptions

Apacer AH162-A is a removable flash disk drive with USB interface and capabilities of supporting various storage capacities. Compatible with both USB 1.1 and 2.0 specifications with its plug-and-play nature, AH162-A is can be easily adopted in any computing system with an available USB port. The device can be automatically detected by the host computer so that users can access data to read, write, copy, or move data between host system drive and AH162-A. No battery, cable, or software driver is required, AH162-A is widely compatible with mainstream computer platforms, no matter desktop or laptops, as long as there is an available USB port. AH162-A makes data transfer easy, fast and handy.

2. Features

- Compatible with USB 1.1 and 2.0 specifications
- Capacity: SLC – 2, 4 GB
 MLC – 8, 16, 32 GB
- Operating system support:
 - Windows: 2000 SP4, XP, Vista, and 7. (note: no device driver is necessary for Windows starting from XP).
 - Mac OS 8.1 or later (for USB 1.1 interface speed)
 - Mac OS X 10.2.8 or later (for USB 2.0 interface speed)
 - Linux Kernel: version 2.4.0 or above (for USB 1.1 interface speed)
 - Linux Kernel: version 2.4.10 or above (for USB 2.0 interface speed)
- Plug & Play
- Data retention up to 10 years
- Operating voltage: DC 4.5 ~ 5.5V from USB port (no external power is required)
- Interface transfer rate:
 - High speed: up to 480Mbps/sec for USB 2.0
 - Full speed: up to 12Mbps/sec for USB 1.1
- Low power consumption
- Altitude: 80,000 feet (relative to sea level)
- Acoustic noise: 0 dB (at one meter)
- Vibration: 15G peak to peak (max)
- Operating temperature: 0-70°C
- Humidity: 20% to 90%

3. Performance

Table 3-1 Performance (SLC)

Capacity Performance	2 GB	4 GB
Sustained read (MB/s)	22	24
Sustained write (MB/s)	19	21

Table 3-2 Performance (MLC)

Capacity Performance	8 GB	16 GB	32 GB
Sustained read (MB/s)	26	26	25
Sustained write (MB/s)	11	11	12

Note: Results may differ from various flash configurations or host system setting

4. Power consumption

Table 4-1: Typical power consumption (SLC)

Capacity Modes	2 GB	4 GB
Active (mA)	75	70
Idle (mA)	40	40

Table4-2: Typical power consumption (MLC)


Capacity Modes	8 GB	16 GB	32 GB
Active (mA)	100	100	100
Idle (mA)	40	40	40

Note: Results may differ from various flash configurations or host system setting

5. Operating Range


Items	Range
Supply Voltage	5.0V±10% (4.5-5.5V)
Operating temperature	0°C to 70°C
Storage temperature	-25°C to 85°C

6. Dimensions

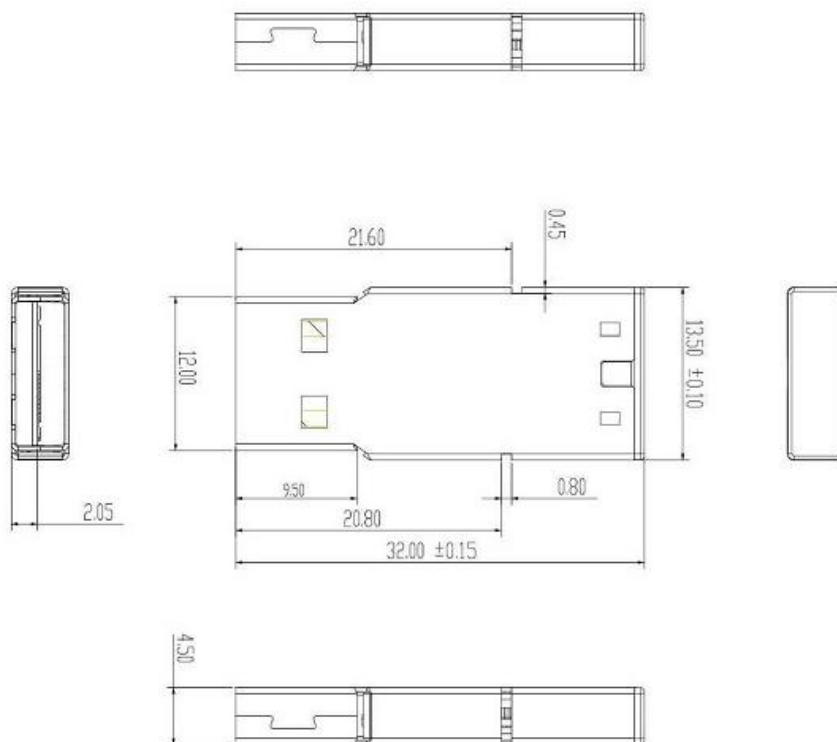


Unit: mm

Tolerance: ± 0.2

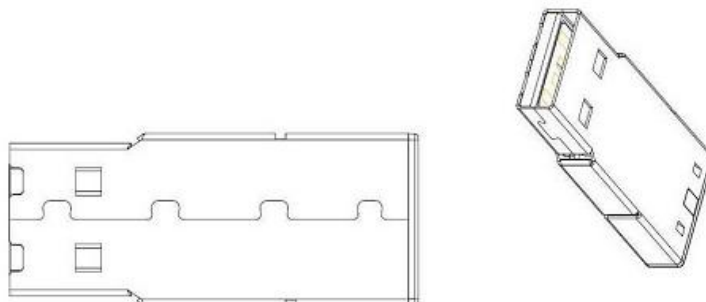

7. Product Ordering Information

7.1 Product Code Designations

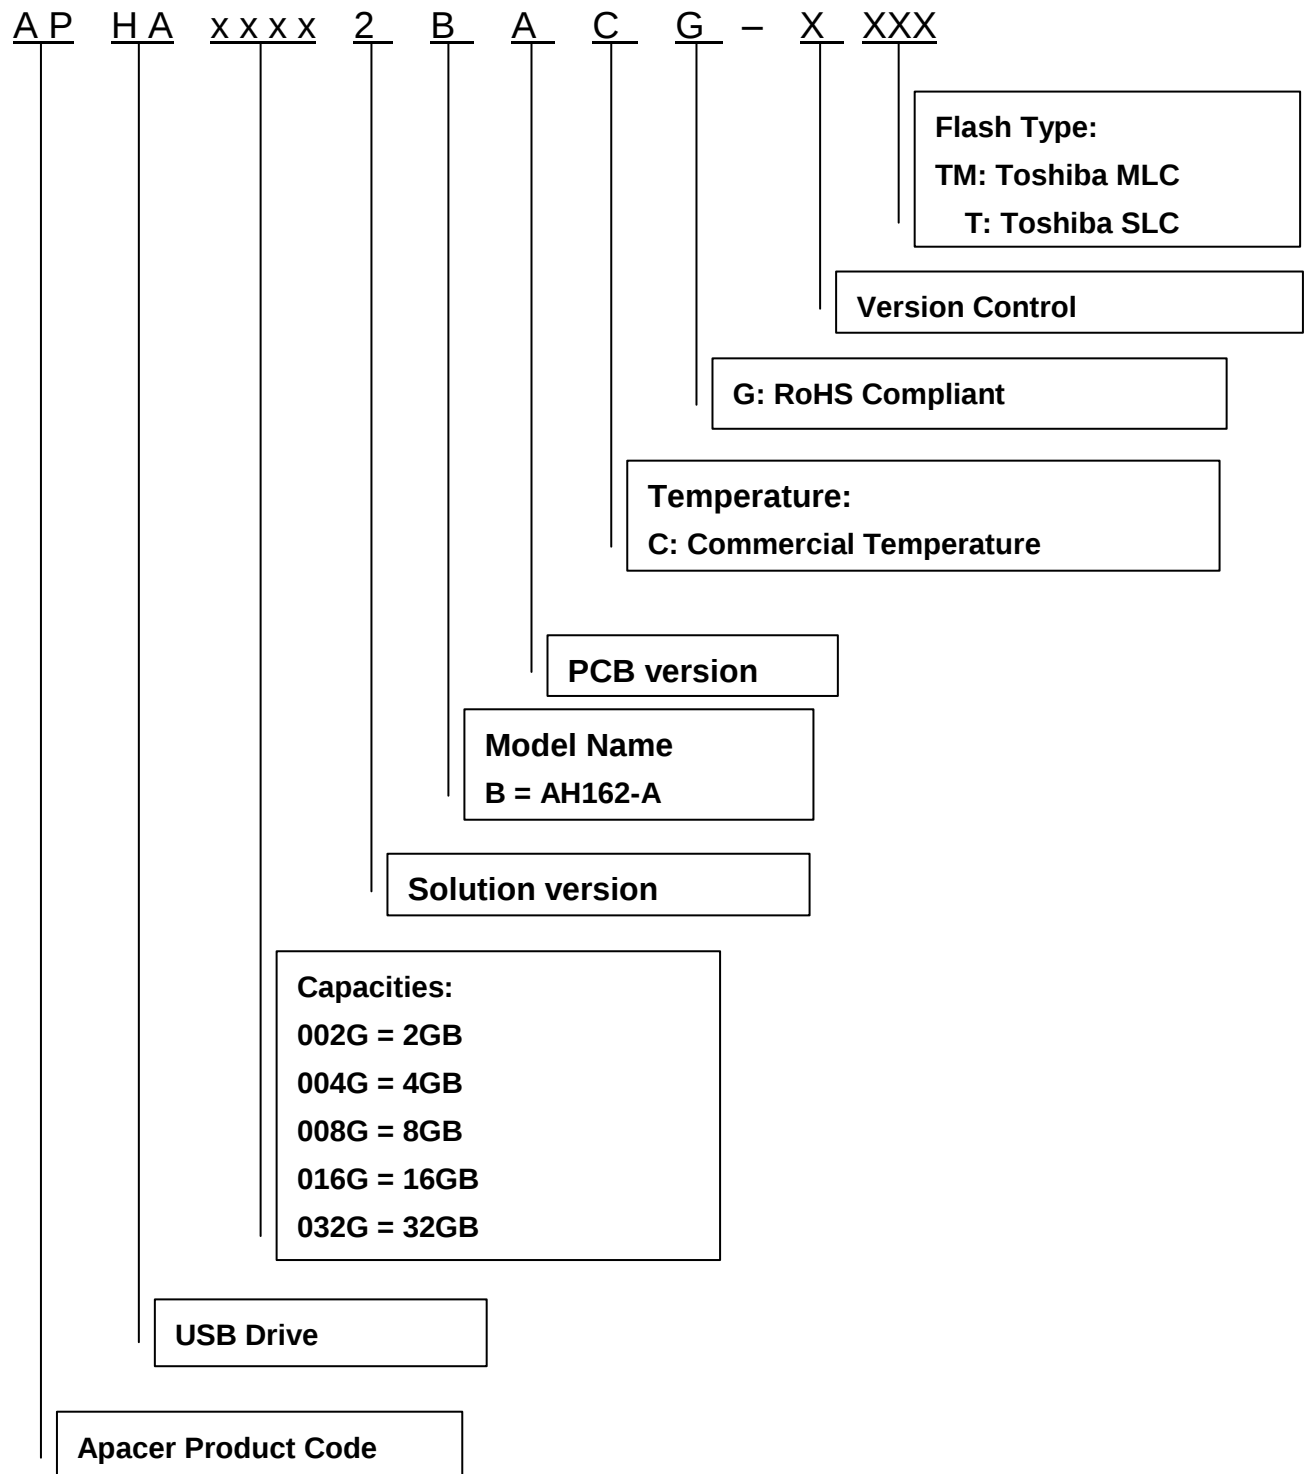

7.2 Valid Combinations

7.2.1 AH162-A (SLC)

Capacity	Standard
2GB	APHA002G2BACG-CT
4GB	APHA004G2BACG-CT

7.2.2 AH162-A (MLC)

Capacity	Standard
8GB	APHA008G2BACG-DTM
16GB	APHA016G2BACG-DTM
32GB	APHA032G2BACG-DPTM

Revision History

Revision	Date	Description	Remark
1.0	11/04/2014	Official release	
1.1	11/06/2014	Revised the label photo of cover page	
1.2	02/11/2015	Added 4 GB SLG information	
1.3	10/13/2015	Revised based on the 15nm flash spec	

Global Presence

Taiwan (Headquarters)	Apacer Technology Inc. Apacer Technology Inc. 1F., No.32, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan R.O.C. Tel: 886-2-2267-8000 Fax: 886-2-2267-2261 amtsales@apacer.com
U.S.A.	Apacer Memory America, Inc. 46732 Lakeview Blvd., Fremont, CA 94538 Tel: 1-408-518-8699 Fax: 1-510-249-9568 sa@apacerus.com
Japan	Apacer Technology Corp. 5F, Matsura Bldg., Shiba, Minato-Ku Tokyo, 105-0014, Japan Tel: 81-3-5419-2668 Fax: 81-3-5419-0018 ipservices@apacer.com
Europe	Apacer Technology B.V. Science Park Eindhoven 5051 5692 EB Son, The Netherlands Tel: 31-40-267-0000 Fax: 31-40-267-0000#6199 sales@apacer.nl
China	Apacer Electronic (Shanghai) Co., Ltd Room D, 22/FL, No.2, Lane 600, JieyunPlaza, Tianshan RD, Shanghai, 200051, China Tel: 86-21-6228-9939 Fax: 86-21-6228-9936 sales@apacer.com.cn

USB Flash Drive
APHxxxxx2BACG-XXXX



India

Apacer Technologies Pvt Ltd,
Unit No.201, "Brigade Corner", 7th Block Jayanagar,
Yediyur Circle, Bangalore – 560082, India
Tel: 91-80-4152-9061
Fax: 91-80-4170-0215
sales_india@apacer.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Apacer:

[APHA016G2BACG-DTM](#) [APHA032G2BACG-DPTM](#) [APHA008G2BACG-DTM](#)