


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	7 ~ 24	Vdc
RATED CURRENT (MAX)	350	mA
MINIMUM SPL @ 10 CM (1KHz)	100	dBa
RESONANT FREQUENCY	100 ~ 6000	Hz
TONE OR PULSE RATE	REPEATING	0 pulse/sec
OPERATING TEMPERATURE	-20 ~ +60	°C
STORAGE TEMPERATURE	-30 ~ +70	°C
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	LEAD WIRE	-
WEIGHT	30	grams


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.


REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	1/6/2011	
A	UPDATED NOTE 4 DUE TO MEMORY INCREASE	3/15/2016	B.R.

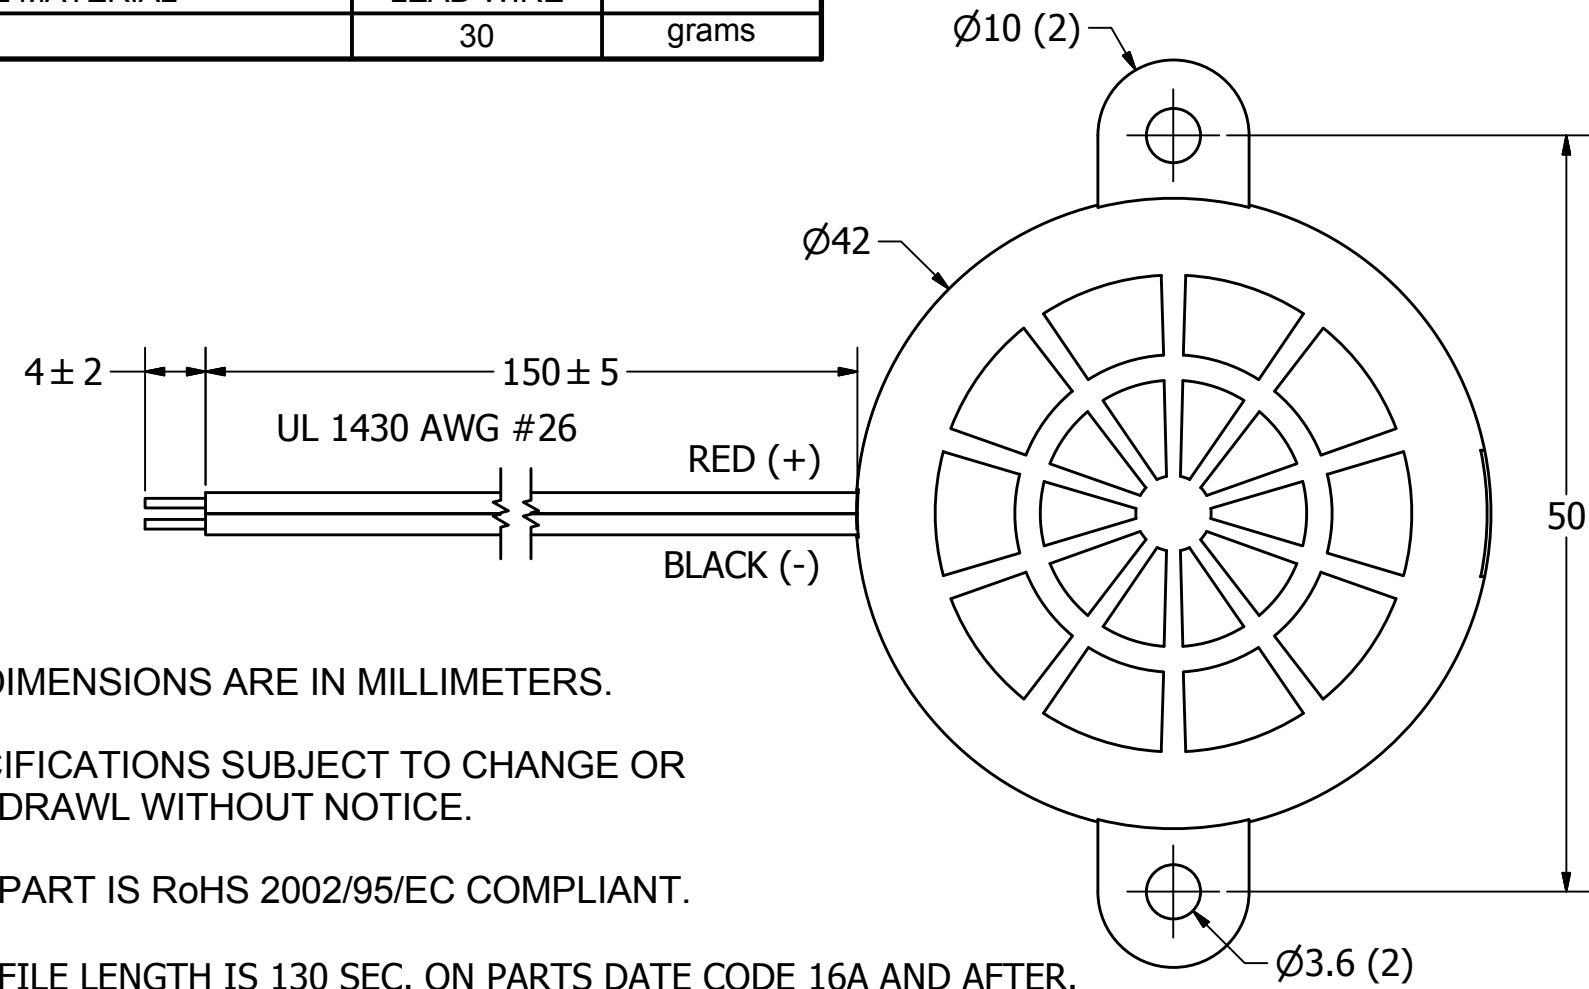

- NOTES:**
1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
 4. MAX. FILE LENGTH IS 130 SEC. ON PARTS DATE CODE 16A AND AFTER. PARTS DATE CODE 15L AND EARLIER HAVE 33 SEC. MAX FILE LENGTH
 5. SAMPLING RATE: 12 KHz
 6. CONTINUOUS TONES OF 2KHz AND ABOVE MAY SOUND DISTORTED DUE TO SAMPLING RATE.
 7. WORKS WITH WINDOWS 2000, XP, VISTA, WINDOWS 7, 8, AND 10.
 8. OPTIONAL USB TO MINI USB CABLE: PUI PART# API-CABLE.
 9. PATENT PENDING.

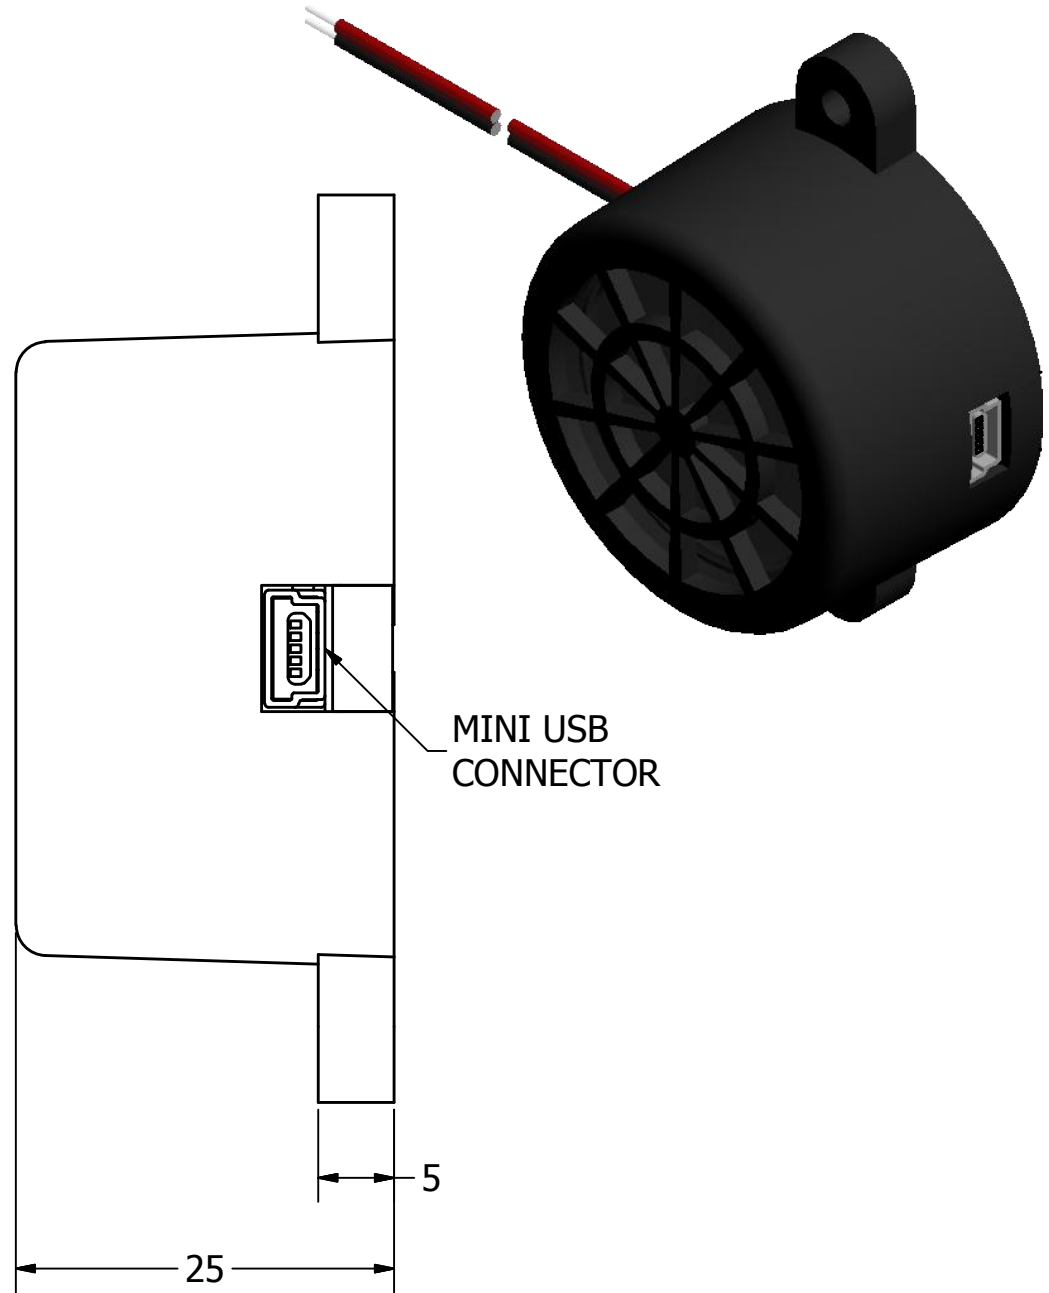

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date	
		J.D.	1/6/2011	M.L.	3/29/2011	B.R.	3/29/2011	1/6/2011	
	A3	 pui audio [™] inc a projects unlimited company			API-4260-LW150-R				
					Indicator				
API-4260-LW150-R.idw								-	1 / 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[API-4260-LW150-R](#)