


NOTES:
1. ELECTRICAL SPECIFICATIONS:
CENTER FREQUENCY = 868 ±4 MHz
POLARIZATION: LHCP
3d VSWR B.W. = 30 MHz
GAIN SHALL BE 3dBIC MIN @ CF AT BORE SIGHT
A/R SHALL BE 6dB MAX @ CF AT BORE SIGHT
ZIN = 50 OHMS
2. 100% ELECTRICAL TEST PRIOR TO DELIVERY.
3. FOOTPRINT AND ELECTRICAL SPECIFICATIONS
ARE SUBJECT TO CHANGE

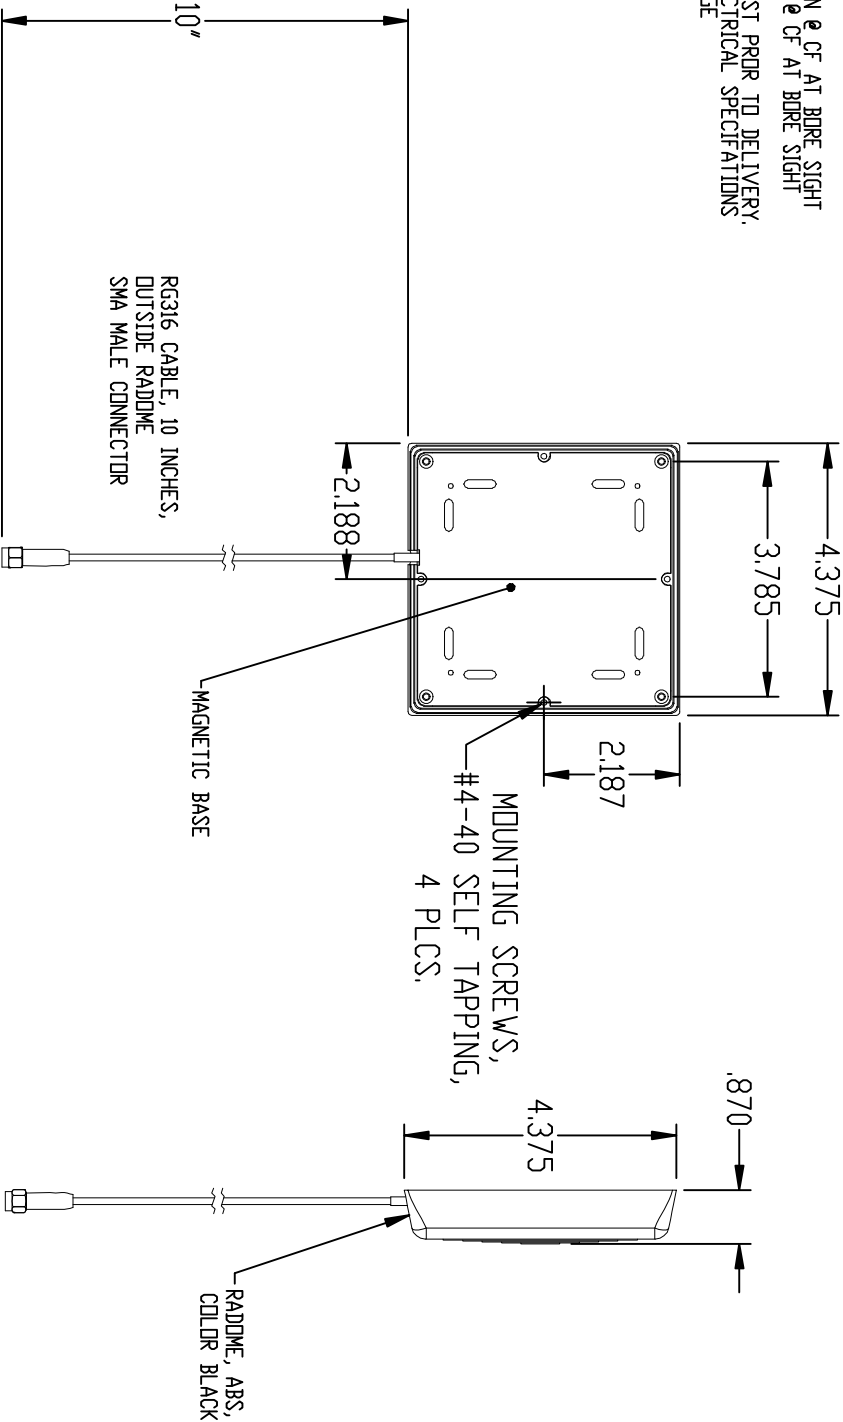

										8	REV. 02
										CN 54907-ENG	
										CHANGE NOTICE	
										UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
										TOLERANCES UNLESS OTHERWISE SPECIFIED	
										Dim. A ± .010	
										Dim. B ± .005	
										Angles ± .07°	
										DO NOT SCALE	
										THIRD ANGLE PROJECTION	
										CODE IDENT. NO.	
										01872	
										FAIRVIEW	
										PENNYSYLVANIA	
										ASSEMBLY, 100GFSMA	
										SW316	
										AR780868030CCLF	
										Sheet 1 of 1	

Quality Products From The Specialists In Electro-Magnetic Compatibility