


ARV CONNECTOR

Wire-to-wire

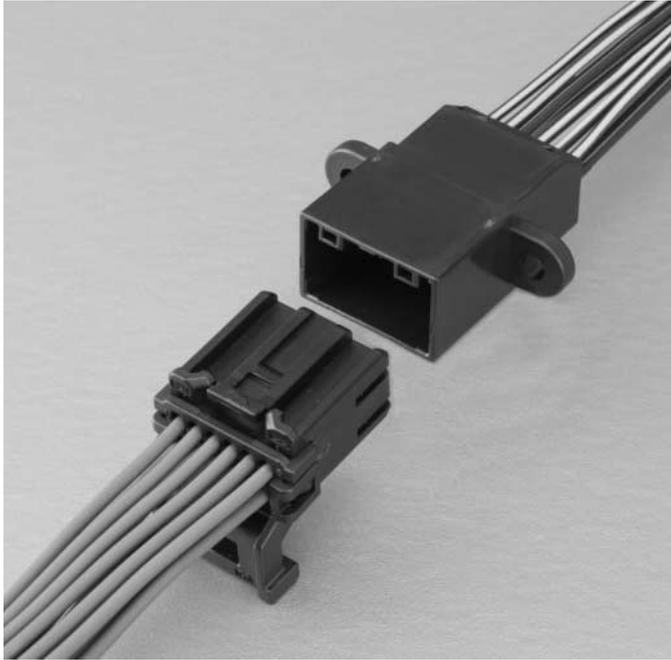


0.64 Unsealed wire-to-wire connection system for unsealed applications, requiring Automotive durability.

Features


- 12 Circuits, 18 Circuits and 22 Circuits Wire-to-Wire Connection
- Optional Wire Routing Attachment (to optimize packaging space)
- Versatile Mounting Options
- Latch Overstress Feature
- Both Female and Male Connectors utilize Independent Secondary Lock for Terminal retention

Screw hole type

- Normal type

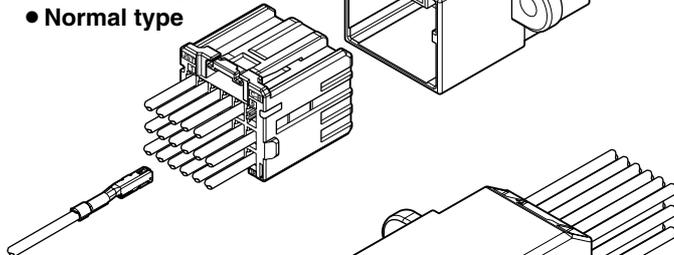


- With back cover type

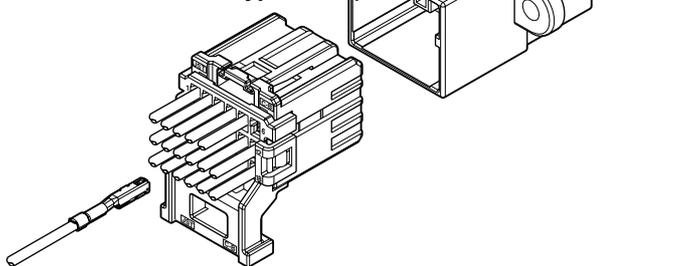


Clip mountable type

- Normal type

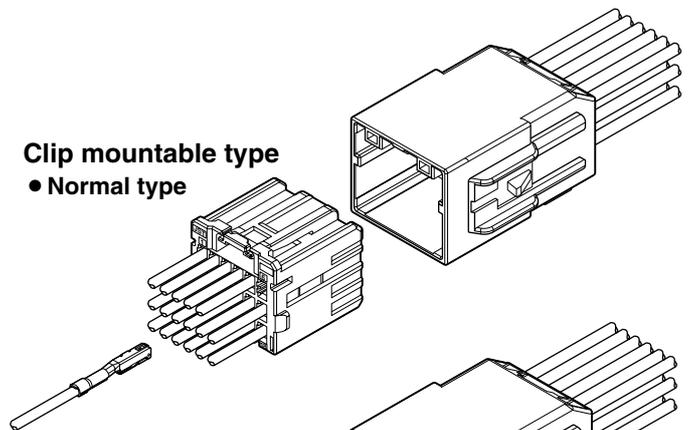

- With back cover type

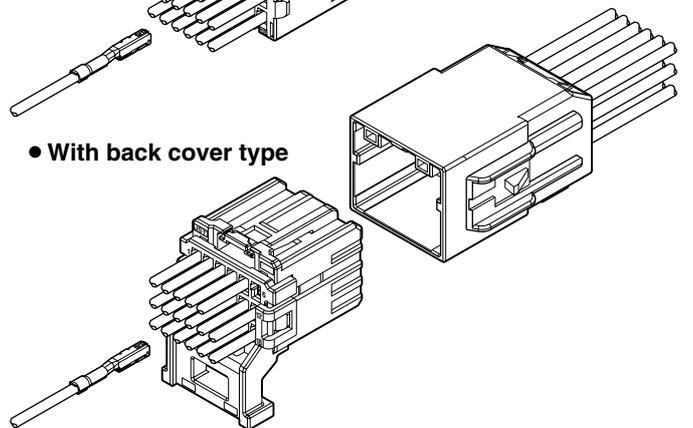


Specifications

- Current rating: 5 A DC max.
- Voltage rating: 14 V DC
- Temperature range: -40°C to +125°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 15 mΩ max.
After environmental tests/ 15 mΩ max.
- Insulation resistance: 100 MΩ min.
- Applicable Wire: TXL/ ISO 0.35 mm² to 0.75 mm²
O.D. ≤ 1.9 mm (AWG #22 to #18)
(Female Terminal)
ISO 0.35 mm² to 0.5 mm²
O.D. ≤ 1.7 mm (AWG #22 to #20)
(Male Terminal)

* Compliant with ELV/RoHS.

* Contact JST for details.


Female terminal

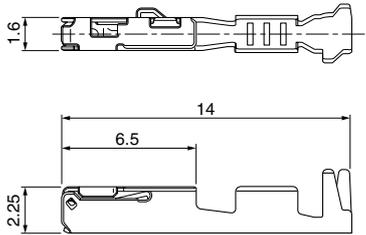


Model No.	Applicable wire range		Q'ty/reel
	Conductor (mm ²)	Insulation O.D. (mm)	
SAIT-A03T-M064	0.35 to 0.5	≤1.9	6,500
SAIT-A02T-M064	0.75	≤1.9	6,500
Material and Finish			
Copper alloy, tin-plated (reflow treatment)			

Female connector


• 12 circuits

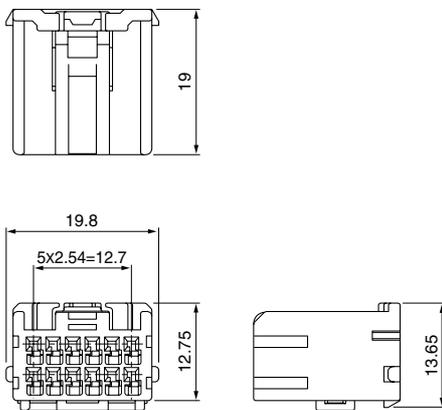


• 12 circuits (With back cover)

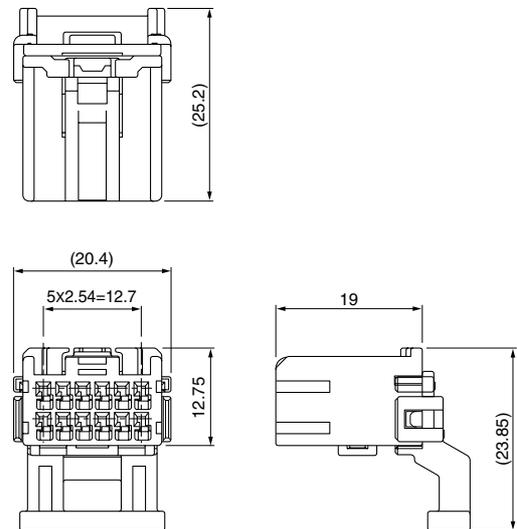

• 18 circuits

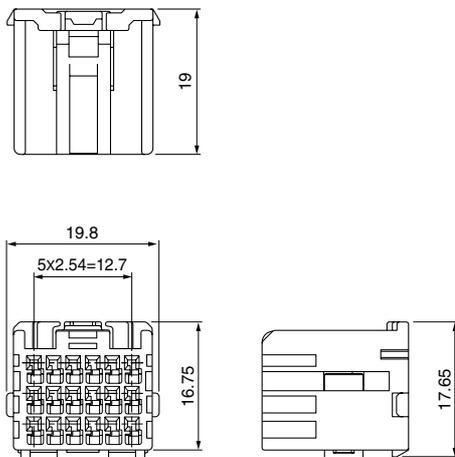


• 18 circuits (With back cover)

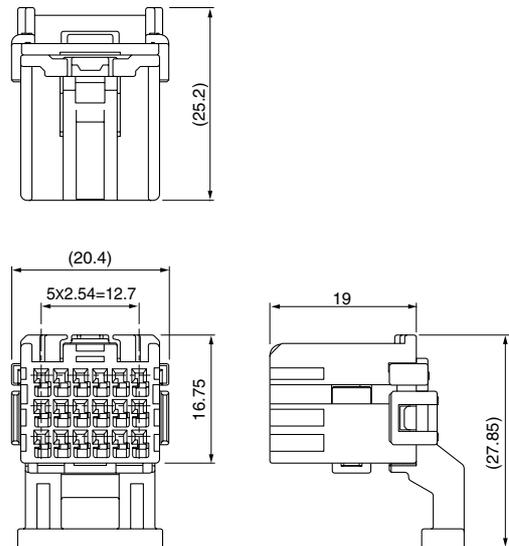


ARV CONNECTOR

Female connector

• 22 circuits

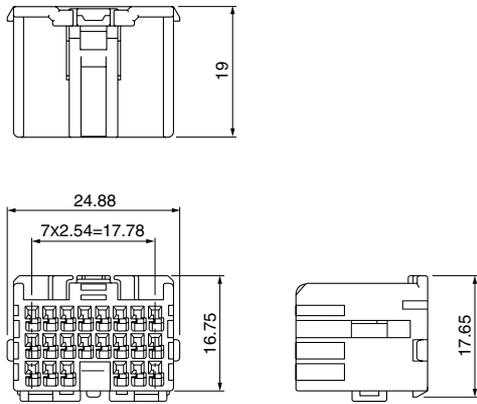

• 22 circuits (With back cover)

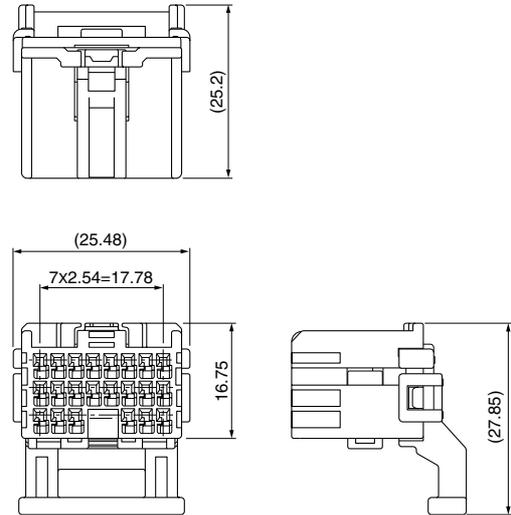


Circuits	Model No.	Back Cover	Q'ty/box
12	ARVPB-12-2AK	No	1,500
	ARVPB-12C12-2AK	Yes	1,500
18	ARVPB-18-3AK	No	1,000
	ARVPB-18C18-3AK	Yes	1,000
22	ARVPB-22-3AK	No	600
	ARVPB-22C22-3AK	Yes	500

Material and Finish

Housing: PBT, Black
 TPA: Glass-filled PBT, Natural (White)
 Back cover: Glass-filled PBT, Black

Male terminal

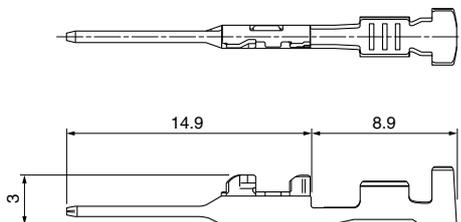


Model No.	Applicable wire range		Q'ty/reel
	Conductor (mm ²)	Insulation O.D. (mm)	
SNAC3W-A021T-0.64	0.35 to 0.5	≤1.7	7,000

Material and Finish


Brass, tin-plated (reflow treatment)

Male connector


● 12 circuits (Screw hole Mountable Type)

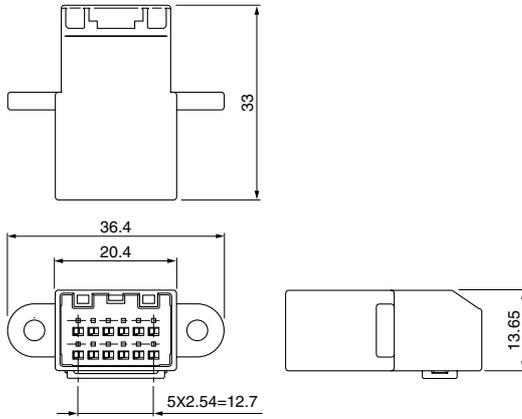


● 12 circuits (Clip Mountable Type)

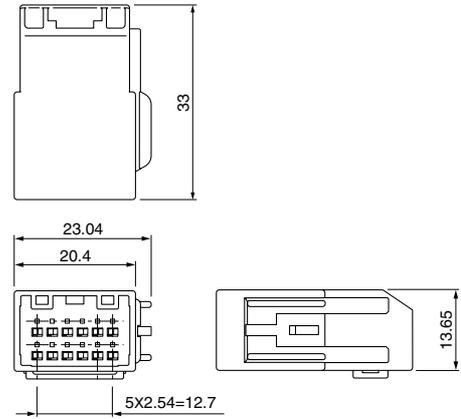


● 18 circuits (Screw hole Mountable Type)

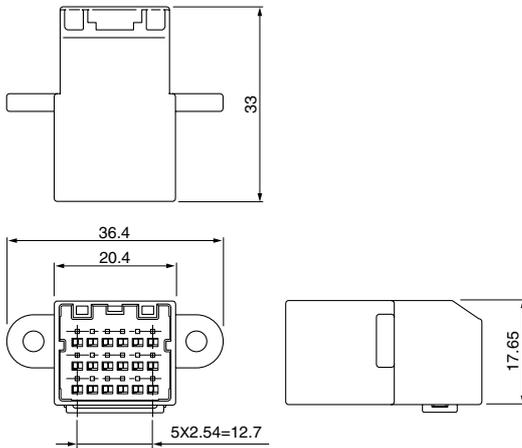


● 18 circuits (Clip Mountable Type)

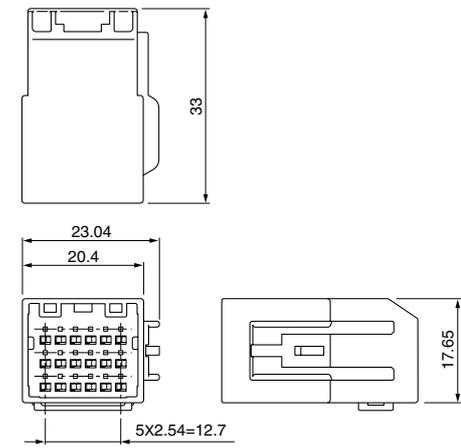

● 22 circuits (Screw hole Mountable Type)

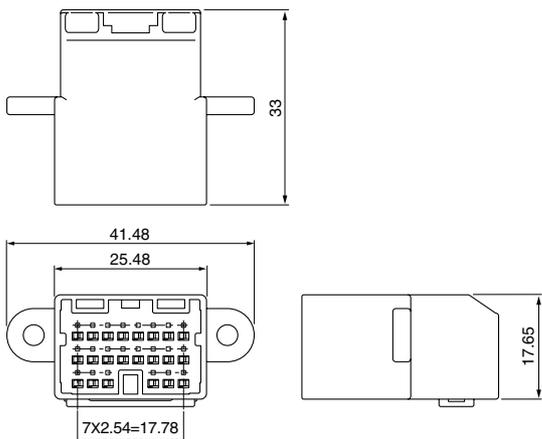

● 22 circuits (Clip Mountable Type)

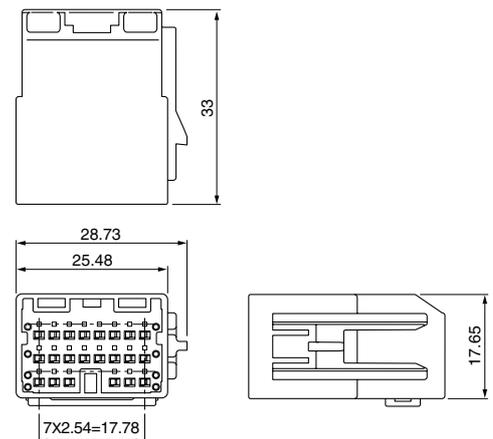

Circuits	Model No.	Mountable Style	Q'ty/box
12	ARVWSB-12B-2AK	Screw hole	1,000
	ARVWSB-12BC-2AK	Clip	1,000
18	ARVWSB-18-3AK	Screw hole	750
	ARVWSB-18C-3AK	Clip	750
22	ARVWSB-22-3AK	Screw hole	450
	ARVWSB-22C-3AK	Clip	450

Material and Finish


Housing: Glass-filled PBT, Black
PBT, Black (22P only)

TPA: Glass-filled PBT, Natural (White)


ARV CONNECTOR

Assembly layout


• 12 circuits

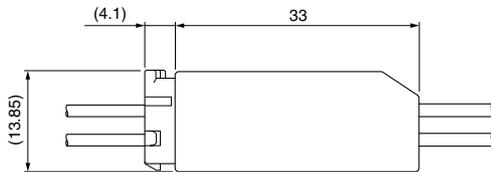


• 18, 22 circuits

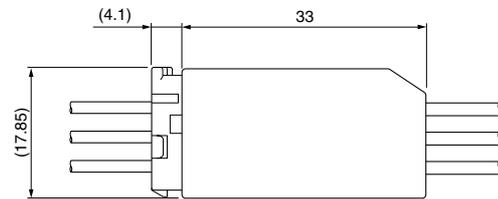

• 12 circuits (With back cover)

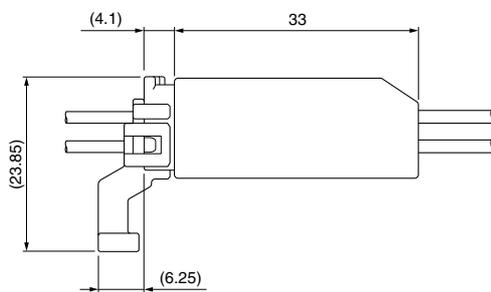

• 18, 22 circuits (With back cover)

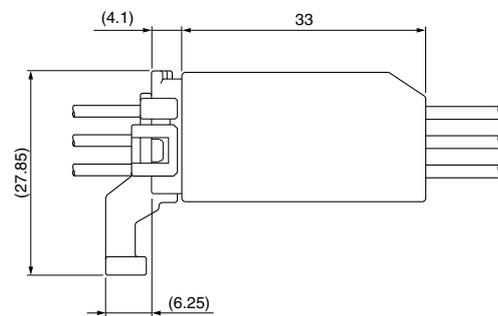

Crimping machine, Applicator

Strip terminal	Crimping machine	Crimp applicator MKS-L	
		Dies	Crimp applicator with dies
SAIT-A03()-M064	AP-K2N	MK/SAIT-A03-064	APLMK SAIT-A03-064
SAIT-A02()-M064		MK/SAIT-A02-064	APLMK SAIT-A02-064
SNAC3W-A021()-0.64		MK/SNAC3W-A021-064	APLMK SNAC3W-A021-064

Note: When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JST:

[SNAC3W-A021T-0.64](#) [ARVPB-12-2AK](#) [ARVWSB-12C-2AK](#) [ARVWSB-18C-3AK](#) [ARVPB-18C18-3AK](#) [ARVPB-18-3AK](#) [ARVPB-12C12-2AK](#) [ARVWSB-12-2AK](#) [ARVWSB-18-3AK](#) [ARVWSB-22-3AK](#) [ARVPB-22C22-3AK](#) [ARVPB-22-3AK](#) [ARVWSB-12BC-2AK](#) [ARVWSB-12B-2AK](#)