


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
© 2003, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	1.5	W
MAX INPUT POWER	3	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 1W/1M (AT 1.0, 1.2, 1.5, 2.0 kHz)	83±3	dBA
DISTORTION	5%	—
RESONANT FREQUENCY	800±20%	Hz
FREQUENCY RANGE	800 ~ 5,000	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	MYLAR	—
MAGNET MATERIAL	N35	—
OPERATING TEMPERATURE	-20 ~ +55	°C
WEIGHT	13	grams

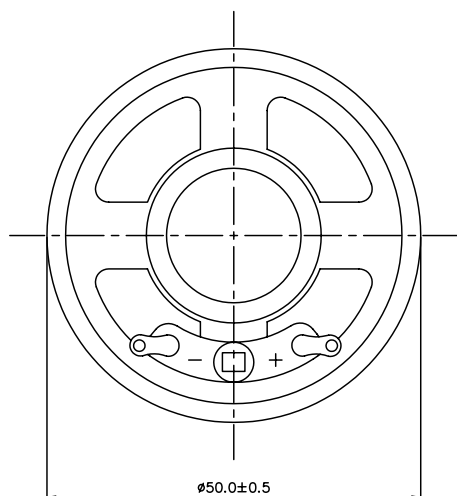


NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AS05008MR-3.DWG

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	8/27/04	

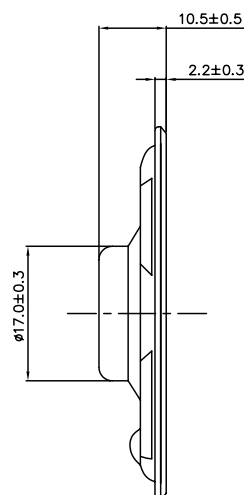

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS.TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.



projects®
unlimited

Dayton , Ohio

DYNAMIC SPEAKER
AS05008MR-3

APPROVALS	DATE
DRAWN <i>R.A.C.</i>	8/04
CHECKED <i>E.P.</i>	8/04
APPROVED <i>R.W.</i>	8/04
DO NOT SCALE DRAWING	

SIZE
A

DRAWING NO.
AS05008MR-3

SCALE: N.T.S.

SHEET 1 OF 1