



Wide input voltage ranges from 8 to 385 V DC
1 or 2 isolated outputs up to 48 V DC
Class I equipment



- Rugged electrical and mechanical design
- Fully isolated outputs
- Operating ambient temperature range
-40 - 71°C with convection cooling

Model Selection

Output 1		Output 2		Type	Type	Type	Options
$V_{o\ nom}$ [V DC]	$I_{o\ nom}$ [A]	$V_{o\ nom}$ [V DC]	$I_{o\ nom}$ [A]	Input Voltage 8 - 35 V DC	Input Voltage 14 - 70 V DC	Input Voltage 20 - 100 V DC	
5.1	16	-	-	AS 1001-7R	BS 1001-7R	FS 1001-7R	-9, E, D, V, P, T, B1
12	8	-	-	AS 1301-7R	BS 1301-7R	FS 1301-7R	-9, E, D, P, T, B1
15	6.5	-	-	AS 1501-7R	BS 1501-7R	FS 1501-7R	-9, E, D, P, T, B1
24	4.2	-	-	AS 1601-7R	BS 1601-7R	FS 1601-7R	-9, E, D, P, T, B1
24	4	-	-	AS 2320-7R	BS 2320-7R	FS 2320-7R	-9, E, D, P, T, B1
30	3.2	-	-	AS 2540-7R	BS 2540-7R	FS 2540-7R	-9, E, D, P, T, B1
48	2	-	-	AS 2660-7R	BS 2660-7R	FS 2660-7R	-9, E, D, P, T, B1
12	4	12	4	AS 2320-7R	BS 2320-7R	FS 2320-7R	-9, E, D, P, T, B1
15	3.2	15	3.2	AS 2540-7R	BS 2540-7R	FS 2540-7R	-9, E, D, P, T, B1
24	2	24	2	AS 2660-7R	BS 2660-7R	FS 2660-7R	-9, E, D, P, T, B1

Output 1		Output 2		Type	Type	Type	Options
$V_{o\ nom}$ [V DC]	$I_{o\ nom}$ [A]	$V_{o\ nom}$ [V DC]	$I_{o\ nom}$ [A]	Input Voltage 28 - 140 V DC	Input Voltage 44 - 220 V DC	Input Voltage 67 - 385 V DC	
5.1	16	-	-	CS 1001-7R	DS 1001-7R	ES 1001-7R	-9, E, D, V, P, T, B1
12	8	-	-	CS 1301-7R	DS 1301-7R	ES 1301-7R	-9, E, D, P, T, B1
15	6.5	-	-	CS 1501-7R	DS 1501-7R	ES 1501-7R	-9, E, D, P, T, B1
24	4.2	-	-	CS 1601-7R	DS 1601-7R	ES 1601-7R	-9, E, D, P, T, B1
24	4	-	-	CS 2320-7R	DS 2320-7R	ES 2320-7R	-9, E, D, P, T, B1
30	3.2	-	-	CS 2540-7R	DS 2540-7R	ES 2540-7R	-9, E, D, P, T, B1
48	2	-	-	CS 2660-7R	DS 2660-7R	ES 2660-7R	-9, E, D, P, T, B1
12	4	12	4	CS 2320-7R	DS 2320-7R	ES 2320-7R	-9, E, D, P, T, B1
15	3.2	15	3.2	CS 2540-7R	DS 2540-7R	ES 2540-7R	-9, E, D, P, T, B1
24	2	24	2	CS 2660-7R	DS 2660-7R	ES 2660-7R	-9, E, D, P, T, B1

Input

Input voltage	6 wide-input ranges (1:5)	refer to selection chart
Inrush current limitation	FS, CS, DS, ES by thermistor	

Output

Efficiency	$V_{i\text{ nom}}, I_{o\text{ nom}}$	up to 86%
Output voltage setting accuracy	$V_{i\text{ nom}}, I_{o\text{ nom}}$	$\pm 0.6\% V_{o\text{ nom}}$
Output voltage switching noise	IEC/EN 61204, total	typ. 100 mV _{pp}
Line regulation	$V_{i\text{ min}} - V_{i\text{ max}}, I_{o\text{ nom}}$	typ. $\pm 0.3\% V_{o\text{ nom}}$
Load regulation	$V_{i\text{ nom}}, 10 - 100\% I_{o\text{ nom}}$, symmetrical output load	typ. $0.4\% V_{o\text{ nom}}$
Minimum load	not required	0 A
Current limitation	rectangular U/I characteristic	typ. $110\% I_{o\text{ nom}}$
Operation in parallel	by current limitation	
Hold-up time	$V_{i\text{ nom}}, I_{o\text{ nom}}$, CS/DS/ES/FS with ext. diode in input line	12 - 40 ms
	$V_{i\text{ nom}}, I_{o\text{ nom}}$, AS/BS with ext. diode in input line	typ. 1.8 ms

Control and protection

Input reverse polarity	built-in fuse not user accessible	
Input undervoltage lockout		typ. $80\% V_{i\text{ min}}$
Input overvoltage lockout		typ. $108\% V_{i\text{ max}}$
Input transient protection	varistor or suppressor diode	
Output	no-load, overload and short circuit proof	
Output overvoltage	suppressor diode in each output	typ. $130\% V_{o\text{ nom}}$
Overtemperature	switch-off with auto restart	T_C typ. 100°C
Output voltage adjustment		0 - $110\% V_{o\text{ nom}}$
Inhibit	TTL input, output(s) disabled if open circuit	
Status indication	LEDs: OK, inhibit, overload	

Safety

Approvals	EN 60950, UL 1950, CSA 22.2 No. 950	
Class of equipment		class I
Protection degree		IP 30
Electric strength test voltage	I/case	2 kV AC
	I/O	4 kV AC
	O/case	1 kV AC
	O/O	0.1 kV AC

EMC

Electrostatic discharge	IEC/EN 61000-4-2, level 4 (8/15 kV)	criterion A
Electromagnetic field	IEC/EN 61000-4-3, level x (20 V/m)	criterion A
Electr. fast transients/bursts	IEC/EN 61000-4-4, level 4 (2/4 kV)	criterion A
Surge	IEC/EN 61000-4-5, level 3 (2 kV)	criterion A
Conducted disturbances	IEC/EN 61000-4-6, level 3 (10 V)	criterion A
Electromagnetic emissions	CISPR 22/EN 55022, conducted	class B

Environmental


Operating ambient temperature	$V_{i\ nom}, I_{o\ nom}$, convection cooled	-25 to 71 °C
Operating case temperature T_C	$V_{i\ nom}, I_{o\ nom}$	-25 to 95 °C
Storage temperature	non operational	-40 to 100 °C
Damp heat	IEC/EN 60068-2-3, 93 %, 40 °C	56 days
Vibration, sinusoidal	IEC/EN 60068-2-6, 10 - 60/60 - 2000 Hz	0.35 mm/5 g_n
Shock	IEC/EN 60068-2-27, 6 ms	100 g_n
Bump	IEC/EN 60068-2-29, 6 ms	40 g_n
Random vibration	IEC/EN 60068-2-64, 20 - 500 Hz	4.9 $g_{n\ rms}$
MTBF	MIL-HDBK-217F, G_B , 40 °C	500'000 h

Options

Extended temperature range	-40 - 71 °C, ambient, operating	-9
Electronic inrush current limitation		E
Output voltage adjustment	40 - 110% $V_{o\ nom}$, excludes feature R and vice versa	P
Input and/or output undervoltage monitoring, excludes option V		D0 - D9
Input and/or output undervoltage monitoring (VME), excludes option D		V0, V2, V3
Current sharing		T
Cooling plate		B1


Pin allocation

Pin	AS - ES 1000		AS - ES 2000	
	Signal	Description	Signal	Description
4	Vo1+	Output 1	Vo2+	Output 2
6	Vo1+		Vo2+	
8	Vo1-	Output 1	Vo2-	Output 2
10	Vo1-		Vo2-	
12	S+	Sense	Vo1+	Output 1
14	S-	Sense	Vo1-	
16	R	Control of V_{o1}	R	Control of V_{o1}
18	i	Inhibit	i	Inhibit
20	D	Save data	D	Save data
	V	ACFAIL		
22	T	Current sharing	T	Current sharing
24	⊕	Protective earth	⊕	Protective earth
26	Vi+	Input	Vi+	Input
28	Vi+		Vi+	
30	Vi-	Input	Vi-	Input
32	Vi-		Vi-	

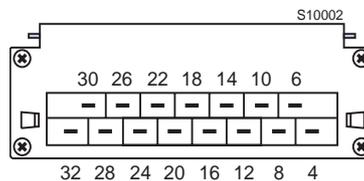

Mechanical data

Tolerances ± 0.3 mm (0.012") unless otherwise indicated.

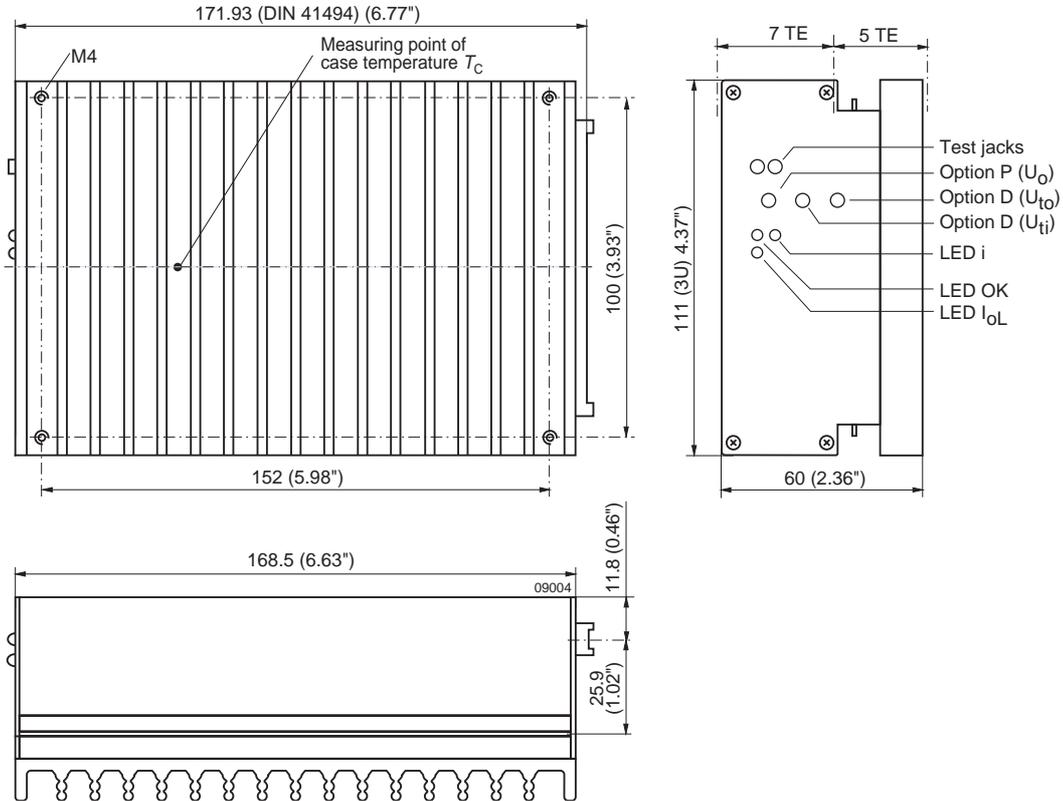

Accessories

- Front panels 19" (Schroff/Intermas)
- Mating H15 connectors with screw, solder, fast-on or press-fit terminals
- Connector retention facilities and code key system for connector coding
- Chassis or wall mounting plates for frontal access
- Universal mounting brackets for chassis or DIN-rail mounting

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.