

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size



5.0 x 3.2 x 0.85mm

ASFLMB

Moisture Sensitivity Level – MSL 1  RoHS/RoHS II CompliantMEMS  
TECHNOLOGY

## FEATURES:

- Pure Silicon™ Clock Oscillator
- 2nd Generation MEMS Technology with reduced jitter by Discera
- Low Power Consumption <10mA
- Exceptional Stability +/- 10ppm Over Temp. at -40 to +105°C
- Compact QFN Plastic Packaging

## APPLICATIONS:

- CCD Clock for VTR Camera
- Equipment Connected to PCs
- Low Profile Equipment
- Computers and Peripherals
- Lower Cost Crystal Oscillator Replacement
- Portable Electronics (MP3 Players, Games)
- Consumer Electronics such as TV's, DVR's, etc.
- Vibrant, Shock-Prone & Humid Environments for Industrial Equipment
- Demanding Military & Automotive Electronics

## STANDARD SPECIFICATIONS:

### Common Key Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range:	1.0		150	MHz	
Operating Temperature:	0		+70	°C	See options
Storage Temperature:	-55		+150	°C	
Overall Frequency Stability*:	-50		+50	ppm	See options
Supply Voltage (Vdd):	+1.8 ~ +3.3			V	
Output Load:			15, 25, or 40	pF kΩ	See options
Symmetry:	45		55	%	@1/2Vdd
Startup Time:		1.5	3.0	ms	
Disable Time:		20	100	ns	
Disable Stand-by Current:			15	uA	
Tri-state Function (Stand-by) :	"1" (VIH≥0.75*Vdd) or Open: Oscillation "0" (VIL<0.25*Vdd) : Hi Z			V	
Aging:	-5.0	-----	+5.0	ppm	First year

### Key Electrical Specifications V<sub>dd</sub>= 1.8V

Parameters	Minimum	Typical	Maximum	Units	Notes
Supply Current (no load):	1.0 to 39.9999MHz	5	15	mA	CL=0p
	40.0 to 79.9999MHz	6	15	mA	RL=∞
	80.0 to 124.9999MHz	7	15	mA	T=25°C
	125.0 to 150MHz	8	15	mA	(Standard CL: 15pF)
	1.0 to 39.9999MHz	6	15	mA	CL=0p
	40.0 to 79.9999MHz	7	15	mA	RL=∞
	80.0 to 124.9999MHz	8	15	mA	T=25°C
	125.0 to 150MHz	9	15	mA	(CL option: 25pF)
	1.0 to 39.9999MHz	7	15	mA	CL=0p
	40.0 to 79.9999MHz	8	15	mA	RL=∞
	80.0 to 124.9999MHz	9	15	mA	T=25°C
	125.0 to 150MHz	10	15	mA	(CL option: 40pF)
Output Voltage:	V <sub>OH</sub>	0.8*V <sub>dd</sub>		V	
	V <sub>OL</sub>		0.2*V <sub>dd</sub>	V	CL=15, 25, 40pF
Rise Time: Fall Time:	T <sub>r</sub>	1.8	3.0	ns	CL=15pF; T=25°C
	T <sub>f</sub>	1.0	3.0	ns	20%/80%*VDD
	T <sub>r</sub>	1.5	3.0	ns	CL=25pF; T=25°C
	T <sub>f</sub>	1.2	3.0	ns	20%/80%*VDD
	T <sub>r</sub>	1.4	3.0	ns	CL=40pF; T=25°C
	T <sub>f</sub>	1.1	3.0	ns	20%/80%*VDD
Cycle to Cycle Jitter:		60		ps	F=100MHz
Period Jitter RMS:		10		ps	F=100MHz

ABRACON IS  
ISO9001:2008  
CERTIFIED

 **ABRACON** LLC  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 11.02.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size



5.0 x 3.2 x 0.85mm

ASFLMB



RoHS/RoHS II Compliant

## Key Electrical Specifications – $V_{dd}=2.5V$

Parameters		Minimum	Typical	Maximum	Units	Notes
Supply Current (no load):	1.0 to 39.9999MHz		6	15	mA	CL=0p RL=∞ T=25°C (Standard CL: 15pF)
	40.0 to 79.9999MHz		7	15	mA	
	80.0 to 124.9999MHz		8	15	mA	
	125.0 to 150MHz		9	15	mA	
	1.0 to 39.9999MHz		7	15	mA	CL=0p RL=∞ T=25°C (CL option: 25pF)
	40.0 to 79.9999MHz		8	15	mA	
	80.0 to 124.9999MHz		9	15	mA	
	125.0 to 150MHz		10	15	mA	
	1.0 to 39.9999MHz		8	16	mA	CL=0p RL=∞ T=25°C (CL option: 40pF)
	40.0 to 79.9999MHz		9	16	mA	
	80.0 to 124.9999MHz		10	16	mA	
	125.0 to 150MHz		11	16	mA	
Output Voltage:	$V_{OH}$	$0.8 \cdot V_{dd}$			V	CL=15, 25pF
	$V_{OL}$			$0.2 \cdot V_{dd}$	V	
	$V_{OH}$	$0.9 \cdot V_{dd}$			V	
	$V_{OL}$			$0.1 \cdot V_{dd}$	V	
Rise Time: Fall Time:	$T_r$		1.0	2.0	ns	CL=15pF; T=25°C 20%/80%*VDD
	$T_f$		0.9	2.0	ns	
	$T_r$		1.1	2.0	ns	CL=25pF; T=25°C 20%/80%*VDD
	$T_f$		0.9	2.0	ns	
	$T_r$		1.0	2.0	ns	CL=40pF; T=25°C 20%/80%*VDD
	$T_f$		0.9	2.0	ns	
Cycle to Cycle Jitter:			50		ps	F=100MHz
Period Jitter RMS:			5		ps	F=100MHz

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size



5.0 x 3.2 x 0.85mm

ASFLMB



RoHS/RoHS II Compliant

## Key Electrical Specifications – $V_{dd}=3.3V$

Parameters		Minimum	Typical	Maximum	Units	Notes
Supply Current (no load):	1.0 to 39.9999MHz		7	15	mA	CL=0p RL=∞ T=25°C (Standard CL: 15pF)
	40.0 to 79.9999MHz		8	15	mA	
	80.0 to 124.9999MHz		9	15	mA	
	125.0 to 150MHz		10	15	mA	
	1.0 to 39.9999MHz		8	16	mA	CL=0p RL=∞ T=25°C (CL option: 25pF)
	40.0 to 79.9999MHz		9	16	mA	
	80.0 to 124.9999MHz		10	16	mA	
	125.0 to 150MHz		11	16	mA	
	1.0 to 39.9999MHz		8	16	mA	CL=0p RL=∞ T=25°C (CL option: 40pF)
	40.0 to 79.9999MHz		9	16	mA	
	80.0 to 124.9999MHz		10	16	mA	
	125.0 to 150MHz		11	16	mA	
Output Voltage:	$V_{OH}$	$0.8 \cdot V_{dd}$			V	CL=15pF
	$V_{OL}$			$0.2 \cdot V_{dd}$	V	
	$V_{OH}$	$0.9 \cdot V_{dd}$			V	
	$V_{OL}$			$0.1 \cdot V_{dd}$	V	
Rise Time: Fall Time:	Tr		1.0	2.0	ns	CL=15pF; T=25°C 20%/80%*VDD
	Tf		0.9	2.0	ns	
	Tr		1.0	2.0	ns	CL=25pF; T=25°C 20%/80%*VDD
	Tf		0.9	2.0	ns	
	Tr		0.8	2.0	ns	CL=40pF; T=25°C 20%/80%*VDD
	Tf		0.8	2.0	ns	
Cycle to Cycle Jitter:			50		ps	F=100MHz
Period Jitter RMS:			5		ps	F=100MHz

## Absolute Maximum Ratings

Item	Minimum	Maximum	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	Vdd+0.3	V	
Junction Temp.		+150	°C	
Storage Temp.	-55	+150	°C	
Soldering Temp.		+260	°C	40sec max
ESD			V	
HBM		4,000		
MM		200		
CDM		1,500		

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size



5.0 x 3.2 x 0.85mm

ASFLMB



RoHS/RoHS II Compliant

## OPTIONS AND PART IDENTIFICATION: (Left Blank if Standard)

### Programmed Orders (Quantity > 1,000pcs)

ASFLMB - [ ] MHz - [ ] - [ ] - [ ]

Frequency in MHz
e.g. 14.3181 MHz (Maximum 4 digits after decimal)

Operating Temp.
Blank: 0°C ~ +70°C
E: -20°C ~ +70°C
L: -40°C ~ +85°C
X: -40°C ~ +105°C

Overall Freq. Stability
C: ±50ppm (STD)
Y: ±10ppm
R: ±25 ppm

Output Load
Blank: 15pF
25: 25pF
40: 40pF

Packaging
Blank*: 72pcs / Tube
T: 1,000pcs / reel
T3: 3,000pcs / reel

\* For Quick turn-around programmable orders < 1000pcs: Due to the immediate availability of stock and the qty of the order, the parts may be delivered as BULK: Cut Tape, Loose parts in Antistatic Bag or in Tube(s). The MOQ per the series will still apply for Tube packaging.

### Un-Programmed Orders

Blank un-programmed oscillators and our low cost portable programmer are available for quick turn engineering requirements. Please call ABRACON or visit MEMSpeed Pro site <http://www.abracon.com/memspeedpro/memspeedpro.html> for more information.

ASFLMB - BLANK - [ ] - [ ] - [ ] - [ ]

Operating Temp.
Blank: 0°C ~ +70°C
E: -20°C ~ +70°C
L: -40°C ~ +85°C
X: -40°C ~ +105°C

Overall Freq. Stability
C: ±50ppm (STD)
Y: ±10ppm
R: ±25 ppm

Output Load
Blank: 15pF
25: 25pF
40: 40pF

Packaging
Blank: 72pcs / Tube
T: 1,000pcs / reel
T3: 3,000pcs / reel

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB


Life Size

5.0 x 3.2 x 0.85mm


ASFLMB

**Pb** RoHS/RoHS II Compliant

## OUTLINE DIMENSIONS:

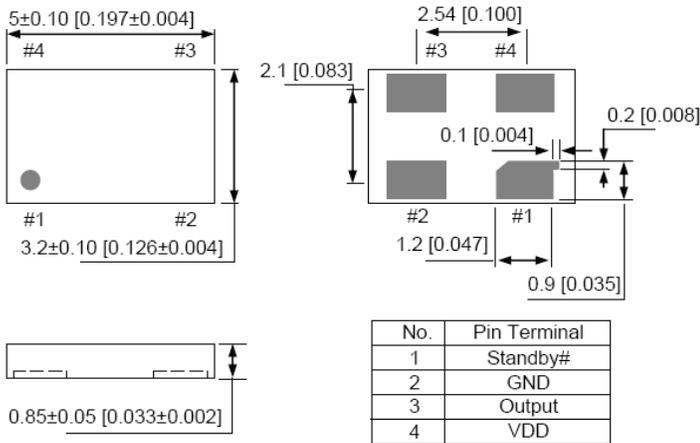


### Recommended Land Pattern

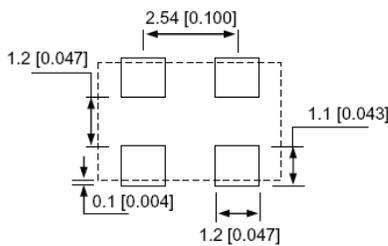

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

Dimensions: mm (inches)




## REFLOW PROFILE:

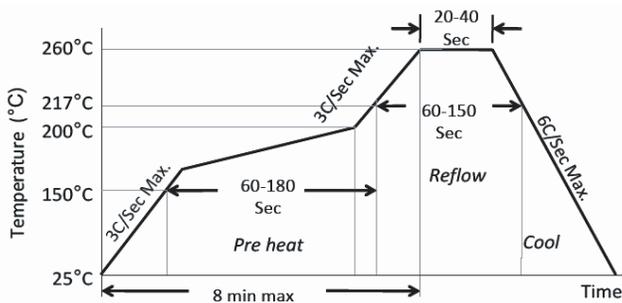


Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.
Preheat Time 150°C to 200°C	60-180 Sec
Time maintained above 217°C	60-150 Sec
Peak Temperature	255-260°C
Time within 5°C of actual Peak	20-40 Sec
Ramp-Down Rate	6°C/Sec Max.
Time 25°C to Peak Temperature	8 min Max.

## TAPE AND REEL:

T= 1,000pcs/reel (D=180mm)  
T3= 3,000pcs/reel (D=330mm)

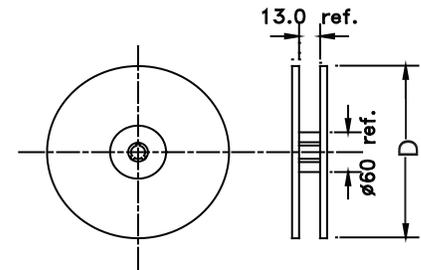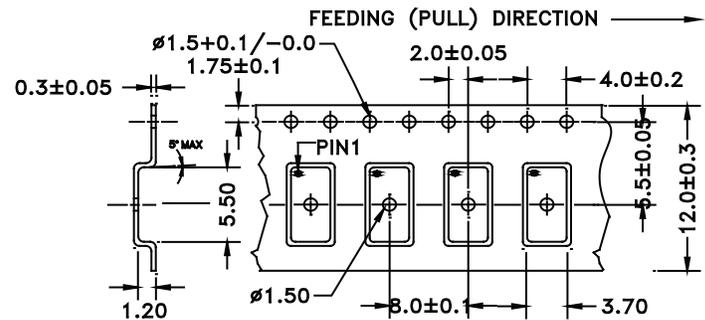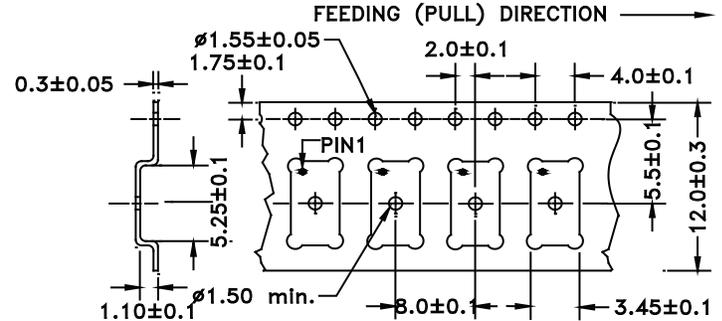

Tube: 72 pcs/tube

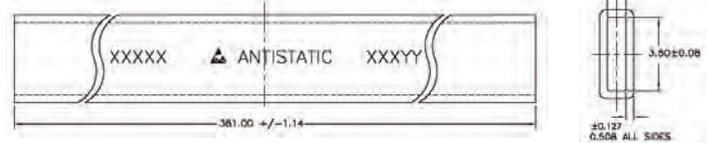

Unit orientation in tube:



Dimensions: mm



Need a test socket for the ASFLMB Series? To view compatible **PRECISION TEST SOCKETS** for these parts, [click here](#): PN: AXS-5032-04-07.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED

**ABRACON**  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 11.02.15

Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ABRACON:

[ASFLMB-BLANK-XY](#) [ASFLMB-BLANK-LY](#) [ASFLMB-BLANK-EY](#) [ASFLMB-BLANK-XR](#) [ASFLMB-BLANK-LR](#)  
[ASFLMB-BLANK-ER](#) [ASFLMB-BLANK-E](#) [ASFLMB-BLANK-L](#) [ASFLMB-BLANK-X](#) [ASFLMB-1.544MHZ-LR-T](#)  
[ASFLMB-1.8432MHZ-LR-T](#) [ASFLMB-10.000MHZ-LR-T](#) [ASFLMB-100.000MHZ-LR-T](#) [ASFLMB-106.250MHZ-LY-T](#)  
[ASFLMB-11.0592MHZ-LR-T](#) [ASFLMB-12.000MHZ-LR-T](#) [ASFLMB-12.288MHZ-LR-T](#) [ASFLMB-125.000MHZ-LY-T](#)  
[ASFLMB-133.333MHZ-LY-T](#) [ASFLMB-14.31818MHZ-LR-T](#) [ASFLMB-14.7456MHZ-LR-T](#) [ASFLMB-150.000MHZ-LY-T](#)  
[ASFLMB-16.000MHZ-LR-T](#) [ASFLMB-16.384MHZ-LR-T](#) [ASFLMB-18.432MHZ-LR-T](#) [ASFLMB-20.000MHZ-LR-T](#)  
[ASFLMB-24.000MHZ-LR-T](#) [ASFLMB-24.576MHZ-LR-T](#) [ASFLMB-25.000MHZ-LR-T](#) [ASFLMB-27.000MHZ-LR-T](#)  
[ASFLMB-29.4912MHZ-LR-T](#) [ASFLMB-3.6864MHZ-LR-T](#) [ASFLMB-30.000MHZ-LR-T](#) [ASFLMB-32.000MHZ-LR-T](#)  
[ASFLMB-33.000MHZ-LR-T](#) [ASFLMB-33.333MHZ-LR-T](#) [ASFLMB-4.000MHZ-LR-T](#) [ASFLMB-40.000MHZ-LR-T](#)  
[ASFLMB-44.000MHZ-LR-T](#) [ASFLMB-48.000MHZ-LR-T](#) [ASFLMB-50.000MHZ-LR-T](#) [ASFLMB-6.000MHZ-LR-T](#)  
[ASFLMB-60.000MHZ-LR-T](#) [ASFLMB-7.3728MHZ-LR-T](#) [ASFLMB-75.000MHZ-LR-T](#) [ASFLMB-8.000MHZ-LR-T](#)  
[ASFLMB-80.000MHZ-LR-T](#) [ASFLMB-1.8432MHZ-LY-T](#) [ASFLMB-1.8432MHZ-XY-T](#) [ASFLMB-10.000MHZ-LY-T](#)  
[ASFLMB-10.000MHZ-XY-T](#) [ASFLMB-100.000MHZ-LY-T](#) [ASFLMB-100.000MHZ-XY-T](#) [ASFLMB-106.250MHZ-XY-T](#)  
[ASFLMB-11.0592MHZ-LY-T](#) [ASFLMB-11.0592MHZ-XY-T](#) [ASFLMB-12.000MHZ-LY-T](#) [ASFLMB-12.000MHZ-XY-T](#)  
[ASFLMB-120.000MHZ-LY-T](#) [ASFLMB-120.000MHZ-XY-T](#) [ASFLMB-125.000MHZ-XY-T](#) [ASFLMB-133.333MHZ-XY-T](#)  
[ASFLMB-14.31818MHZ-LY-T](#) [ASFLMB-14.31818MHZ-XY-T](#) [ASFLMB-14.7456MHZ-LY-T](#) [ASFLMB-14.7456MHZ-XY-T](#)  
[ASFLMB-150.000MHZ-XY-T](#) [ASFLMB-16.000MHZ-LY-T](#) [ASFLMB-16.000MHZ-XY-T](#) [ASFLMB-18.432MHZ-LY-T](#)  
[ASFLMB-18.432MHZ-XY-T](#) [ASFLMB-20.000MHZ-LY-T](#) [ASFLMB-20.000MHZ-XY-T](#) [ASFLMB-24.000MHZ-LY-T](#)  
[ASFLMB-24.000MHZ-XY-T](#) [ASFLMB-24.576MHZ-LY-T](#) [ASFLMB-24.576MHZ-XY-T](#) [ASFLMB-25.000MHZ-LY-T](#)  
[ASFLMB-25.000MHZ-XY-T](#) [ASFLMB-27.000MHZ-LY-T](#) [ASFLMB-27.000MHZ-XY-T](#) [ASFLMB-3.6864MHZ-LY-T](#)  
[ASFLMB-3.6864MHZ-XY-T](#) [ASFLMB-30.000MHZ-LY-T](#) [ASFLMB-30.000MHZ-XY-T](#) [ASFLMB-32.000MHZ-LY-T](#)  
[ASFLMB-32.000MHZ-XY-T](#) [ASFLMB-33.000MHZ-LY-T](#) [ASFLMB-33.000MHZ-XY-T](#) [ASFLMB-33.333MHZ-LY-T](#)  
[ASFLMB-33.333MHZ-XY-T](#) [ASFLMB-4.000MHZ-LY-T](#) [ASFLMB-4.000MHZ-XY-T](#) [ASFLMB-40.000MHZ-LY-T](#)  
[ASFLMB-40.000MHZ-XY-T](#) [ASFLMB-48.000MHZ-LY-T](#) [ASFLMB-48.000MHZ-XY-T](#) [ASFLMB-50.000MHZ-LY-T](#)  
[ASFLMB-50.000MHZ-XY-T](#) [ASFLMB-66.000MHZ-LY-T](#)