




# SURFACE MOUNT TRIMMER CAPACITORS

SMD hermetic ceramic trimmers

## Characteristics

Capacitance range	See table
Voltage	Rated 250 VDC Test 500 VDC
Q at 100 MHz	See table
Operating temp.	-55° C to +125° C
Temp. coeff.	See table
Torque	See table
Insulation resistance	> 10 <sup>4</sup> MΩ at 500 VDC
Vibration	15 g 10-2000 Hz
Shock	100 g 6 ms
Setting drift	<1 %

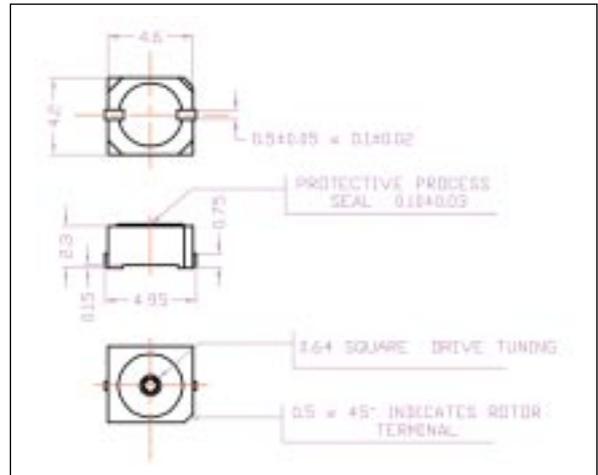

Solder finish terminals

## Technical data

Temex Part N°	Capacitance range (pF)	Temperature coefficient (ppm/°C)	Min Q at 100 MHz	Torque g.cm	Color Code
AT2320-0	0.6 - 2.5	100 ± 200	3000	4 - 70	Red
AT2320-1	1 - 5	100 ± 200	1000	4 - 70	Black
AT2320-2	2.5 - 10	100 ± 200	1000	4 - 70	Blue
AT2320-3	5 - 18	- 450 ± 300	500	4 - 70	Green
AT2320-4	6.5 - 25	- 1100 ± 300	300	4 - 70	Amber

## Packaging

- TAPE AND REEL:** TEMEX tape and reel packaging is in accordance with EIA-481 specification in 12 mm width carrier tape in quantities of 500 on 18 cm reel & 2500 on 33 cm reel
- BULK:** TEMEX standard bulk packaging in a sealed antistatic plastic bag with dessicant

## How to order?

- Standard ex: AT2320-2
- For tape and reel, add code after P/ Nb: R1 for 18 cm diameter reel, and R2 for 33 cm diameter reel

