

Interfacing AT93CXX Serial EEPROMs with Atmel AT89LP Microcontrollers

Features

- Example Read/Write Routines for Accessing Atmel AT93CXX Serial EEPROMs
- Assembly Source Provided
- Applicable to any AT89LP Microcontroller

1. Introduction

Serial memory devices offer significant advantages over parallel devices in applications where lower data transfer rates are acceptable. In addition to requiring less board space, serial devices allow microcontroller I/O pins to be conserved. This is especially valuable when adding external memory to low pin count microcontrollers such as the Atmel AT89LP2052 and AT89LP4052.

This application note presents a suite of software routines which may be incorporated into a user's application to allow AT89LP microcontrollers to read and write AT93CXX serial EEPROMs. All seven AT93CXX device functions are supported: read, write, write all, erase, erase all, erase/write enable and erase/write disable. The routines are general purpose, supporting both eight-bit and sixteen-bit accesses to all members of the 93CXX family. In addition, both 3-wire and 4-wire configurations are supported.

The AT93CXX may be connected to the AT89LP microcontroller in either a 3-wire (Figure 1) or 4-wire (Figure 2) configuration. In the 3-wire configuration, the EEPROM serial data in (DI) and serial data out (DO) pins are both connected to the same microcontroller I/O pin, thereby saving a pin. This is possible because the microcontroller I/O pins can be dynamically reprogrammed as input or output.

Note the strapping of the AT93CXX ORG pins shown in Figure 1 and Figure 2. The ORG (internal organization) pin selects 8-bit data when grounded and 16-bit data when floating or tied to V_{CC} . The ORG pin connections shown in the figures are for illustration only; 8-bit or 16-bit data may be selected in either the 3-wire or 4-wire configuration.

The software for this application may be obtained by downloading from the Atmel Web Site. Consult the comment block at the beginning of the source code file for detailed information on features and operation.



8051 Flash Microcontroller

Application Note

Figure 1-1. 3-Wire Configuration


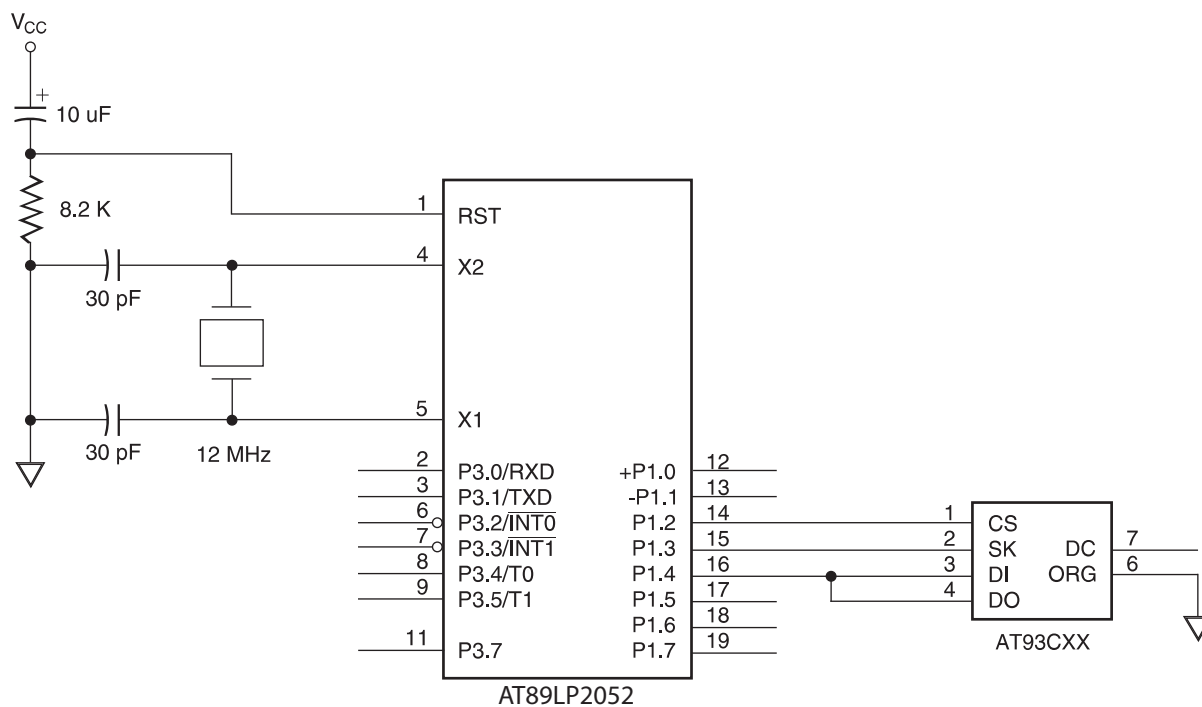


Figure 1-2. Typical Circuit Configuration

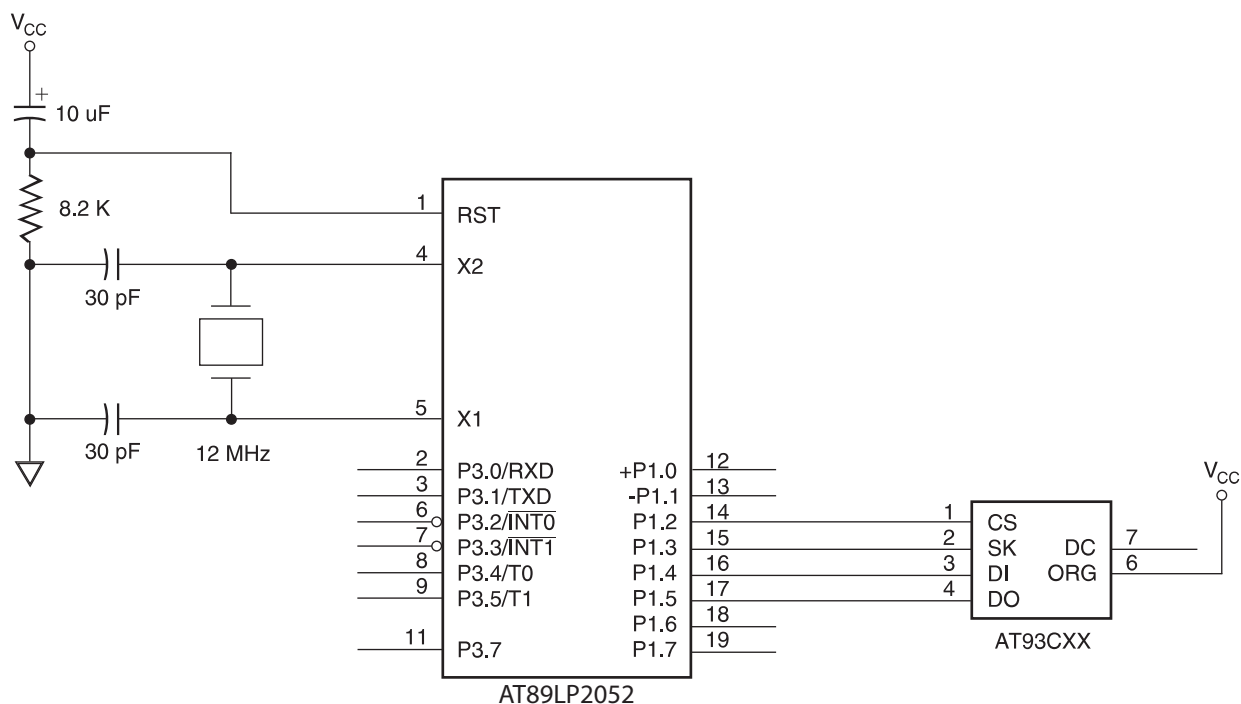

**Atmel Corporation**

2325 Orchard Parkway
San Jose, CA 95131
USA

Tel: (+1) (408) 441-0311

Fax: (+1) (408) 487-2600

www.atmel.com

8051@atmel.com

Atmel Asia Limited

Unit 01-5 & 16, 19F
BEA Tower, Millennium City 5
418 Kwun Tong Road
Kwun Tong, Kowloon
HONG KONG

Tel: (+852) 2245-6100

Fax: (+852) 2722-1369

Atmel Munich GmbH

Business Campus
Packring 4
D-85748 Garching b. Munich
GERMANY

Tel: (+49) 89-31970-0

Fax: (+49) 89-3194621

Atmel Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
JAPAN

Tel: (+81) (3) 3523-3551

Fax: (+81) (3) 3523-7581

© 2011 Atmel Corporation. All rights reserved.

Atmel®, Atmel logo and combinations thereof, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Atmel:](#)

[AT93C46C-10SI-2.5](#)