


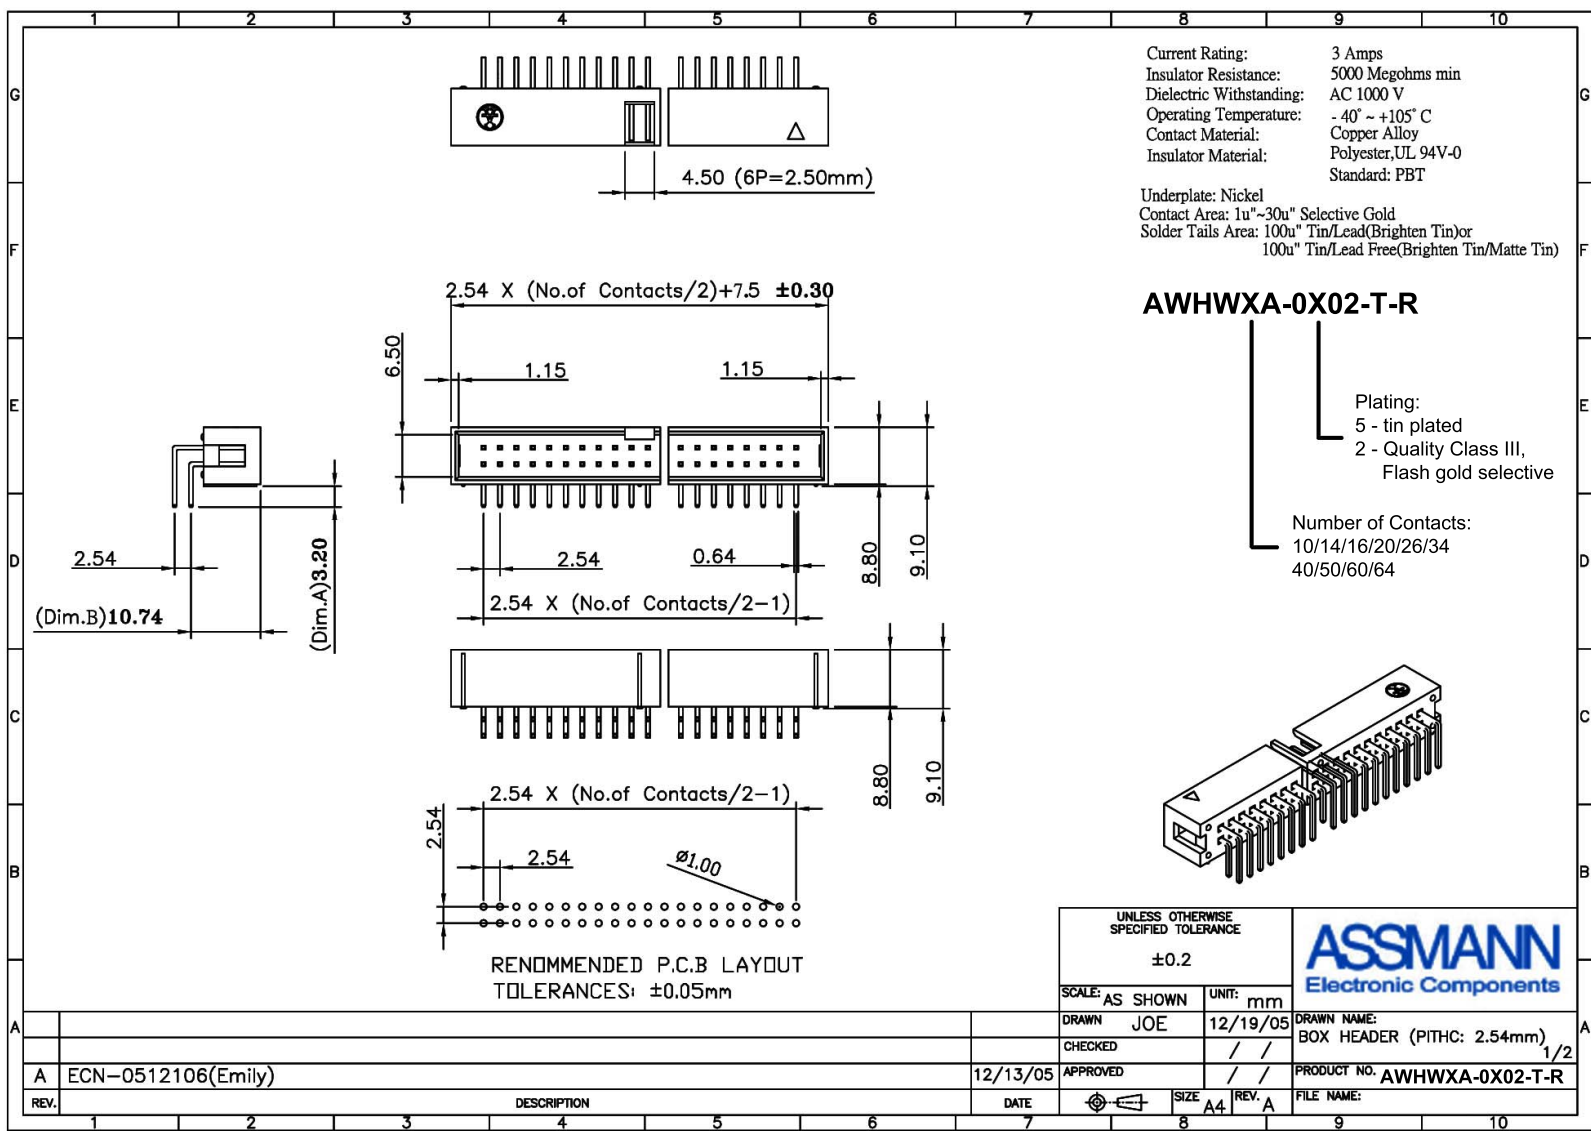


Current Rating: 3 Amps  
Insulator Resistance: 5000 Megohms min  
Dielectric Withstanding: AC 1000 V  
Operating Temperature: - 40° ~ +105° C  
Contact Material: Copper Alloy  
Insulator Material: Polyester, UL 94V-0  
Standard: PBT  
Underplate: Nickel  
Contact Area: 1u"-30u" Selective Gold  
Solder Tails Area: 100u" Tin/Lead (Brighten Tin) or  
100u" Tin/Lead Free (Brighten Tin/Matte Tin)

### AWHWXA-0X02-T-R

Plating:  
5 - tin plated  
2 - Quality Class III,  
Flash gold selective

Number of Contacts:  
10/14/16/20/26/34  
40/50/60/64



| UNLESS OTHERWISE SPECIFIED TOLERANCE |          | ±0.2                                                  |  |
|--------------------------------------|----------|-------------------------------------------------------|--|
| SCALE: AS SHOWN                      | UNIT: mm | <b>ASSMANN</b><br>Electronic Components               |  |
| DRAWN JOE                            | 12/19/05 |                                                       |  |
| CHECKED                              | / /      |                                                       |  |
| APPROVED                             | / /      | DRAWN NAME: BOX HEADER (PITHC: 2.54mm) <sub>1/2</sub> |  |
| DATE 12/13/05                        |          | PRODUCT NO. AWHWXA-0X02-T-R                           |  |
| REV. A                               |          | FILE NAME:                                            |  |

A ECN-0512106(Emily)

REV. DESCRIPTION

DATE

SIZE

REV. A

FILE NAME: