

AXA Series

25 Watts

Data Sheet

Total Power: 25 W
Input Voltage: 24 or 48 V
of Outputs: Single and Dual

SPECIAL FEATURES

- Package size 1.0" x 1.0" x 0.4"
- Ultra-wide 4:1 input range:
9 - 36 Vin, 18 - 75 Vin
- Very high efficiency up to 90%
- Operating temperature range:
-40 °C to +85 °C (with derating)
- Output voltage adjustable
- I/O isolation voltage 1500 Vdc
- Remote ON/OFF control
- Metal case with isolated baseplate
- CSA/UL/IEC/EN 60950-1 Safety Approval

SAFETY

- cUL/UL 60950-1
- IEC/EN 60950-1



Electrical Specifications


Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	90% @ 12 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.2%
Load regulation	±1.0%
Noise/ripple	150 mV
Overload protection	150% typ of Io max, hiccup
Short circuit protection	Hiccup mode
Switching frequency	285 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	2000 pF

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	444 Khrs calculated

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Max Out Cap	Power
AXA06F18-L	9 - 36 Vdc	3.3 V	6 A	87%	10300 µF	19.8 W
AXA05A18-L	9 - 36 Vdc	5 V	5 A	89%	6800 µF	25 W
AXA02B18-L	9 - 36 Vdc	12 V	2.09 A	89%	1200 µF	25 W
AXA02C18-L	9 - 36 Vdc	15 V	1.67 A	90%	750 µF	25 W
AXA01BB18-L	9 - 36 Vdc	±12 V	±1.04 A	89%	680 µF	25 W
AXA01CC18-L	9 - 36 Vdc	±15 V	±0.84 A	89%	380 µF	25 W
AXA06F36-L	18 - 75 Vdc	3.3 V	6 A	88%	10300 µF	19.8 W
AXA05A36-L	18 - 75 Vdc	5 V	5 A	90%	6800 µF	25 W
AXA02B36-L	18 - 75 Vdc	12 V	2.09 A	90%	1200 µF	25 W
AXA02C36-L	18 - 75 Vdc	15 V	1.67 A	90%	750 µF	25 W
AXA01BB36-L	18 - 75 Vdc	±12 V	±1.04 A	89%	680 µF	25 W
AXA01CC36-L	18 - 75 Vdc	±15 V	±0.84 A	89%	380 µF	25 W

Pin Connections		
Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

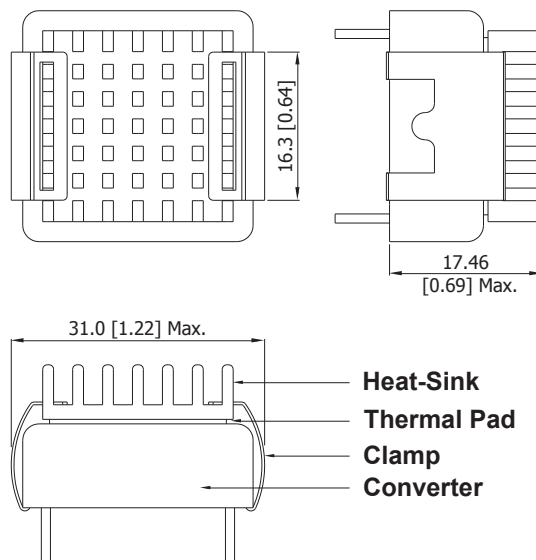

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- Pin diameter Ø 1.0 ±0.05 (0.04±0.002)

ARTESYN™
EMBEDDED TECHNOLOGIES

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Artesyn Embedded Technologies:

[AXA02B18-L](#) [AXA02C18-L](#) [AXA01CC36-L](#) [AXA05A18-L](#) [AXA02B36-L](#) [AXA06F18-L](#) [AXA05A36-L](#) [AXA01BB18-L](#)
[AXA01BB36-L](#) [AXA02C36-L](#) [AXA01CC18-L](#) [AXA06F36-L](#)