


1	2	3
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

1	2	3	4	5	6	7	8
REVISIONS							
DESCRIPTION\PER REQUEST\DATE							

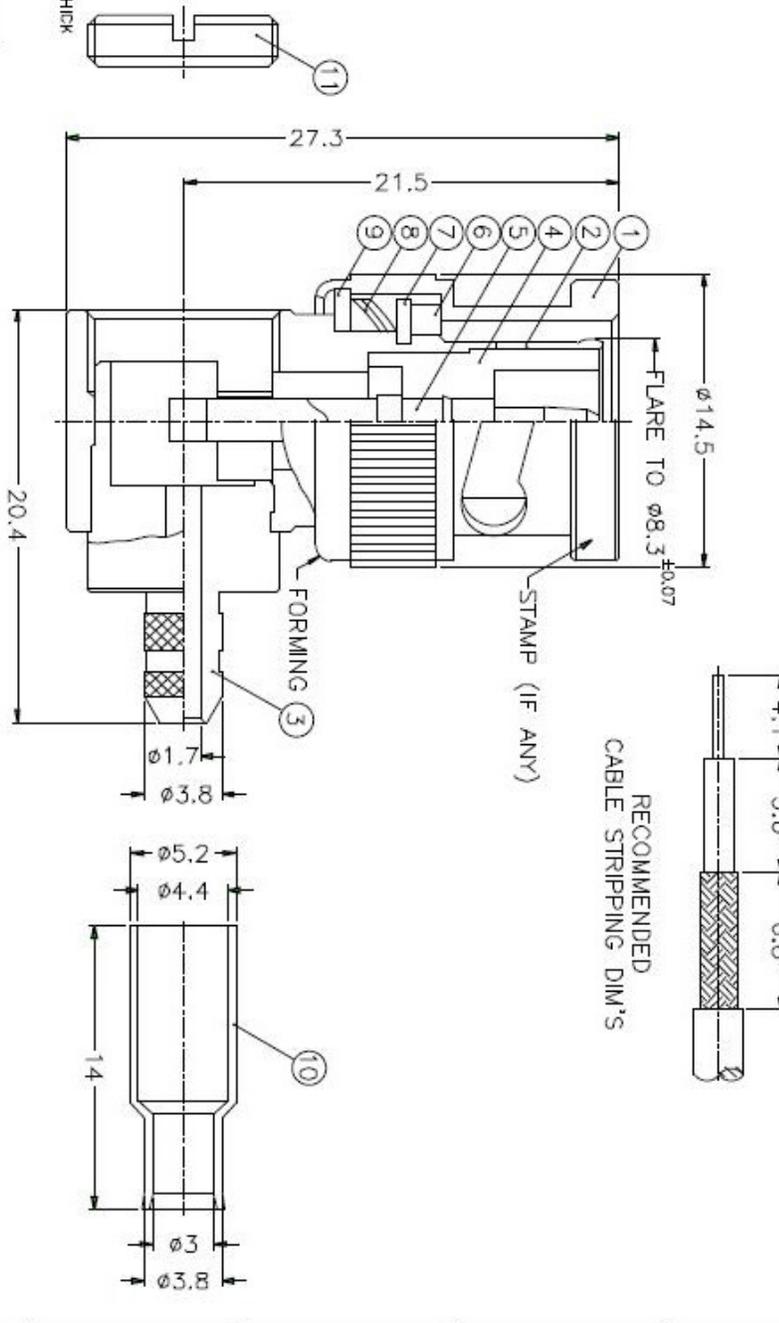

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER 00-B-626
2. BRASS PER 00-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. PTFE . MIL-P-19468
7. JIS H 3250, C 3501

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
11	NUT	NOTE 1	NOTE 3	1	B5291-14
10	FERRULE	NOTE 7	NOTE 3	1	FR-52/44-38/3 X14
9	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
8	SPRING	SK5	NOTE 4	2	B50000-6
7	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	CONTACT PIN	NOTE 1	NOTE 5	1	B5091-6-50
4	INSULATOR	NOTE 6	NATURAL	1	ATC B-3000-3T-50
3	BARREL	NOTE 1	NOTE 3	1	B5091-3-38/17
2	HOUSING	NOTE 1	NOTE 3	1	B5091-2
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED

TOLERANCES

0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE	3/1	ISSUE	A
FILE NO.	B1112E1-NT3G-5-50		
APPROVED	DATE	10-11-01'	
CHECKED	DATE	10-11-01'	
DRAWN	DATE	10-11-01'	

PART NO. B1112E1-NT3G-5-50

TITLE BNC R/A CRIMP PLUG
(FOR RG-174/U,188A/U,316/U)

Amphenol

DRAWING NO. KJ-B1112E1-NT3G-316U-50

ITEM NO.

1. CRIMPED FERRULE
2. HEX CRIMP SIZE .178"
3. CONTACT PIN TO SOLDER

1 2 3 4 5 6 7 8