



SAW multimedia filters

Series/Type: X6964D

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39438X6964N201		2011-01-14	2011-09-30	2012-09-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



SAW Components

X 6964 D

Bandpass Filter

43,75 MHz

Data Sheet


Duroplast package **SIP5D**

Features

- IF filter for digital cable TV
- Standard IC package

Terminals


- Tinned CuFe alloy

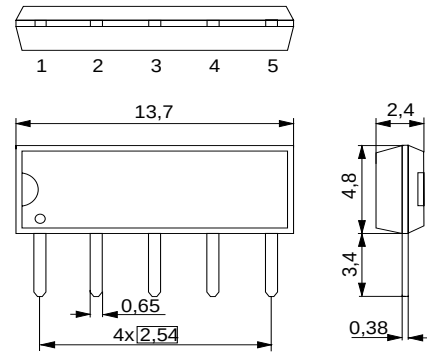

Dimensions in mm, approx. weight 0,5 g

Pin configuration

- | | |
|---|-----------------------|
| 1 | Input |
| 2 | Input - ground |
| 3 | Chip carrier - ground |
| 4 | Output |
| 5 | Output |



Type	Ordering code	Marking and package according to	Packing according to
X 6964 D	B39438-X6964-N201	C61157-A1-A21	F61074-V8049-Z000

Maximum ratings

Operable temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components	X 6964 D
Bandpass Filter	43,75 MHz

Data Sheet

Characteristics

Reference temperature: $T_A = 25 \text{ (45) } ^\circ\text{C}$
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF}$

		min.	typ.	max.	
Center frequency	f_C	(43,68)	(43,75)	(43,82)	MHz
(center between 10 dB points)					
Insertion attenuation	α				
Reference level for the following data	43,81 (43,75) MHz	13,3	14,8	16,3	dB
Pass bandwidth					
$\alpha_{\text{rel}} \leq 3\text{dB}$	$B_{3\text{dB}}$	—	6,0	—	MHz
$\alpha_{\text{rel}} \leq 30\text{dB}$	$B_{30\text{dB}}$	—	7,6	—	MHz
Relative attenuation	α_{rel}				
	41,28 (41,22) MHz	—	0,3	—	dB
	46,34 (46,28) MHz	-0,8	0,2	1,2	dB
	40,81 (40,75) MHz	1,5	2,7	3,9	dB
	46,81 (46,75) MHz	1,5	2,7	3,9	dB
	39,81 (39,75) MHz	38,0	53,0	—	dB
	47,81 (47,75) MHz	37,0	48,0	—	dB
Lower sidelobe					
	35,06 ... 39,06 (35,00 ... 39,00) MHz	42,0	48,0	—	dB
	39,06 ... 39,81 (39,00 ... 39,75) MHz	37,0	46,0	—	dB
Upper sidelobe					
	47,81 ... 50,06 (47,75 ... 50,00) MHz	36,0	41,0	—	dB
	50,06 ... 55,06 (50,00 ... 55,00) MHz	42,0	48,0	—	dB
Reflected wave signal suppression					
1,3 μs ... 6,0 μs after main pulse (test pulse 250 ns, carrier frequency 43,81 MHz)		42,0	52,0	—	dB
Feedthrough signal suppression					
1,3 μs ... 1,2 μs before main pulse (test pulse 250 ns, carrier frequency 43,81 MHz)		50,0	56,0	—	dB
Group delay ripple (p-p)	$\Delta\tau$				
40,81 ... 46,81 (40,75 ... 46,75) MHz		—	40	—	ns
Impedance at 43,81 MHz					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,1 $\parallel$ 16,4	—	k Ω $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,1 $\parallel$ 5,0	—	k Ω $\parallel$ pF
Temperature coefficient of frequency	TC_f	—	-72	—	ppm/K



SAW Components



X 6964 D

Bandpass Filter

43,75 MHz

Data Sheet

Frequency response

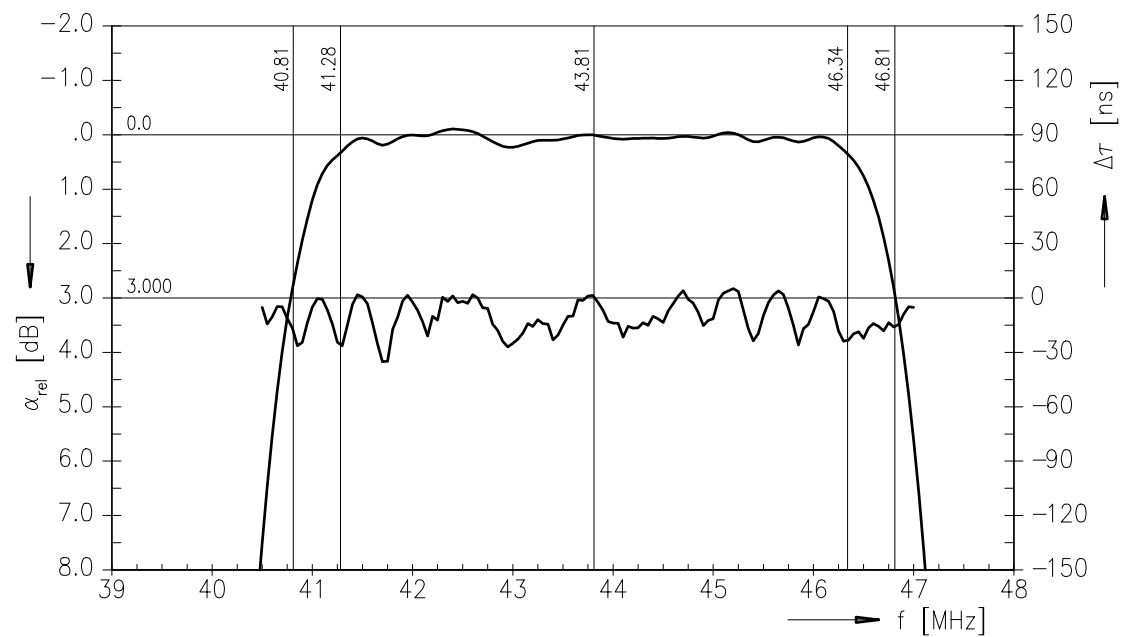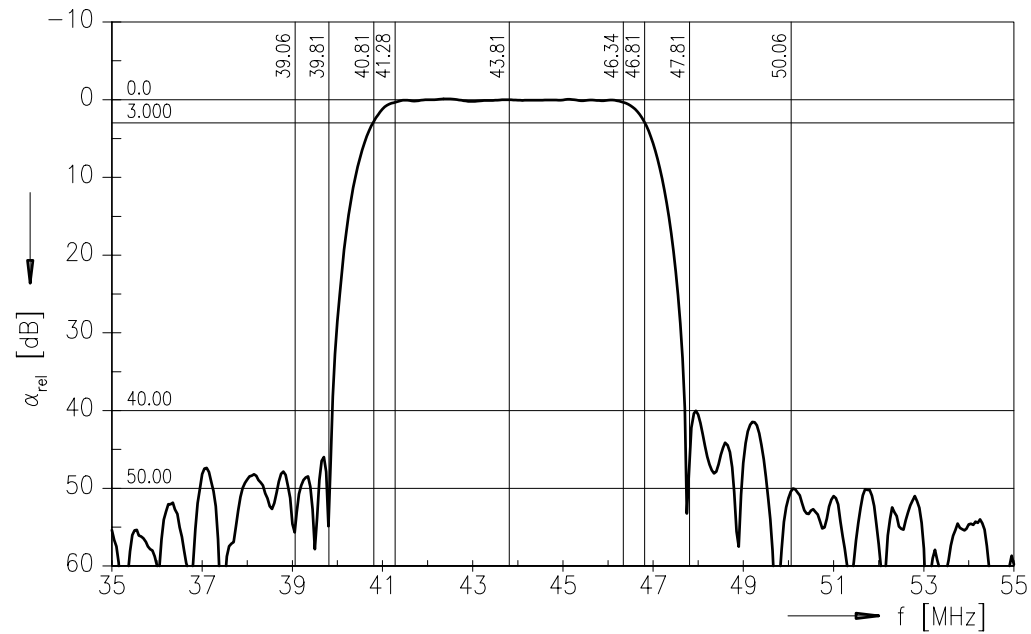



SAW Components


X 6964 D

Bandpass Filter


43,75 MHz

Data Sheet

Frequency response

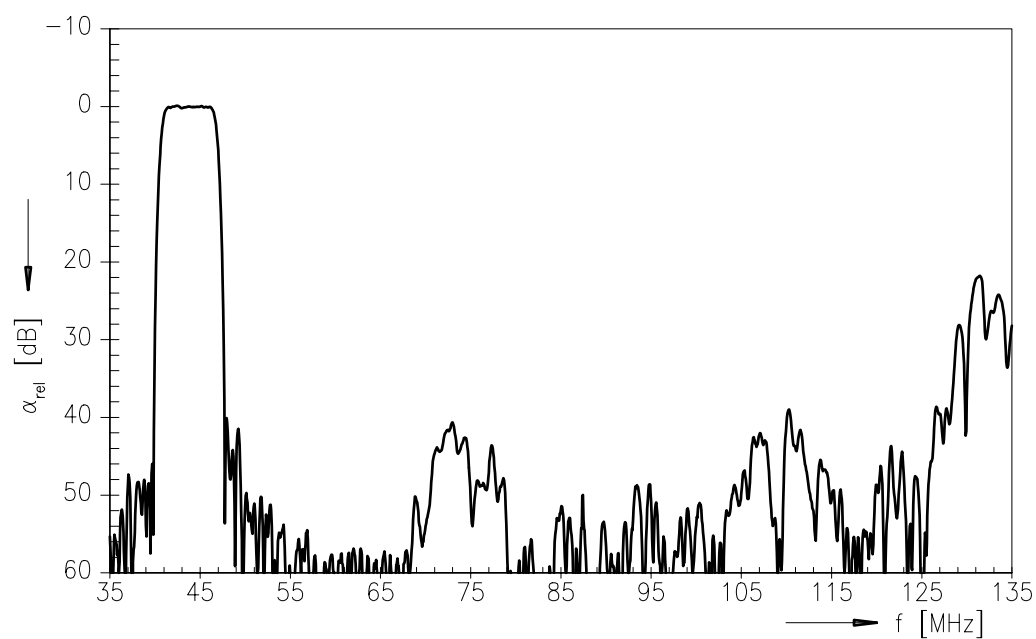

Time domain response

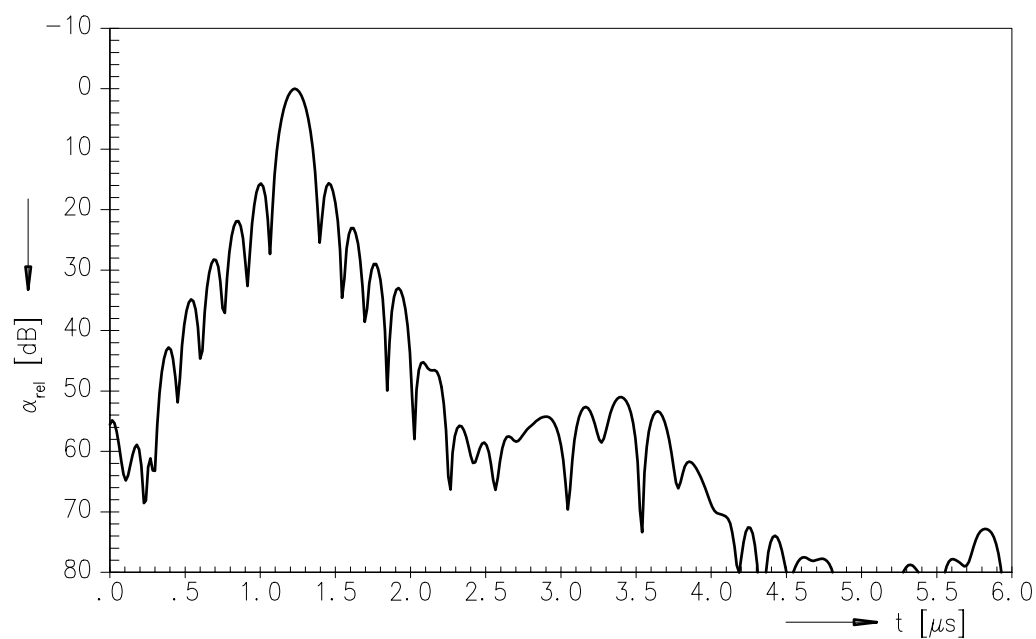



SAW Components	X 6964 D
Bandpass Filter	43,75 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EPCOS:](#)

[B39438X6964N201](#)