
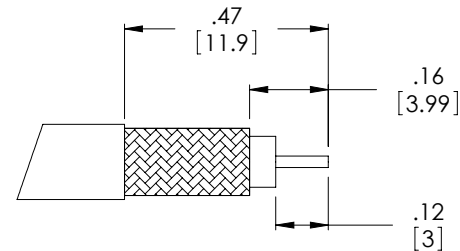
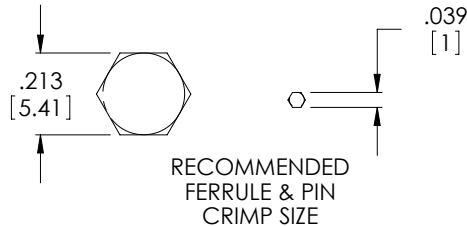





8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3139: UPDATE DWG FORMAT	1/07/08	D.GRIFFIN
F	ECN5321: UPDATED FORMAT AND PHYSICAL APPEARANCE	02/17/11	DFP

DESCRIPTION	MATERIAL	FINISH
MAIN BODY	BRASS	GOLD
CENTER CONTACT	BRASS	GOLD
OUTER CONTACT	BRASS	GOLD
RETAINING RING	BRASS	GOLD
FERRULE	BRASS	GOLD
GASKET	RUBBER	-----
INSULATOR	TEFLON	-----



NOTES:

ELECTRICAL:


IMPEDANCE: 50 OHMS
DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms
FREQUENCY RANGE: DC~6 GHz
VOLTAGE RATING: 500V PEAK
DURABILITY: ≥ 500 CYCLES
CABLE RETENTION: 30 POUNDS PULL

MISCELLANEOUS:

CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY T.CLARK	05/20/2002		
	CHECKED BY D.PARHAM	05/20/2002	CATEGORY COAXIAL	
	APPROVED BY R.CARRICK	05/20/2002	PRODUCT DESCRIPTION CONN SMA M RG58 CRIMP GOLD	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	FSCM NO. 43321	DWG. NO. BAC03-G
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: BAC03-G.SLDDRW	REV. F
		SHEET 1 OF 1		