



BAT54STB-TB6

SURFACE MOUNT SCHOTTKY DIODE ARRAYS

VOLTAGE 30 Volts **POWER** 200mWatts


SOT-563 Unit: inch (mm)

FEATURES

- Isolated diode arrays for significant board space savings
- Surface mount package ideally suited for automatic insertion
- Extremely Fast Switching Speed
- Very Low VF: 0.347V (Typ) at IF = 10mA
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case : SOT-563 plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx Weight : 0.003 gram
- Marking : TK

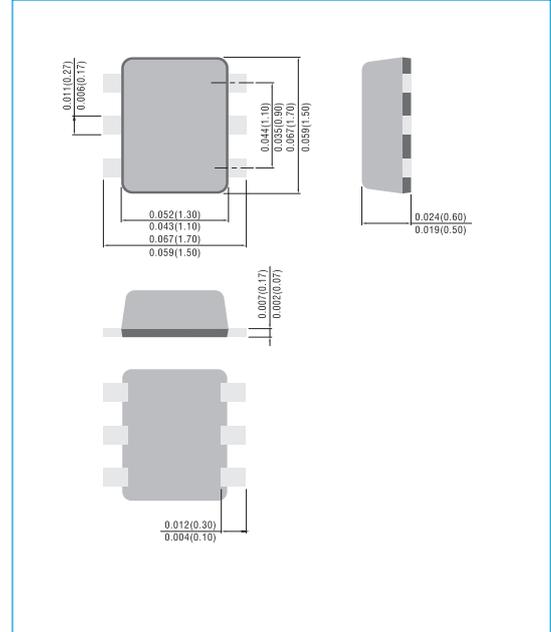

ABSOLUTE RATINGS (each diode)


| Parameter | Symbol | Value | Units |
|----------------------------|-----------|-------|-------|
| Maximum Reverse Voltage | V_R | 30 | V |
| Peak Reverse Voltage | V_{RRM} | 30 | V |
| Continuous Forward Current | I_O | 0.2 | A |

THERMAL CHARACTERISTICS

| Parameter | Symbol | Value | Units |
|--|-----------------|------------|---------------|
| Power Dissipation (Note 1) | P_{TOT} | 200 | mW |
| Thermal Resistance, Junction to Ambient (Note 1) | $R_{\theta JA}$ | 625 | $^{\circ}C/W$ |
| Junction Temperature | T_J | -55 to 125 | $^{\circ}C$ |
| Storage Temperature | T_{STG} | -55 to 150 | $^{\circ}C$ |

NOTE:

- 1. FR-4 Board = 70 x 60 x 1mm.

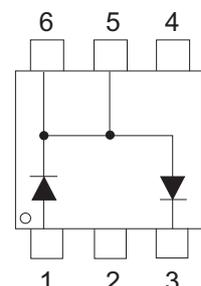






BAT54STB-TB6

ELECTRICAL CHARACTERISTICS (each diode) (TA=25°C, unless otherwise noted)

| Parameter | Symbol | Test Condition | MIN. | TYP. | MAX. | Units |
|---------------------------|------------|--------------------|------|-------|------|---------|
| Reverse Breakdown Voltage | $V_{(BR)}$ | $I_R=100 \mu A$ | 30 | - | - | V |
| Reverse Current | I_R | $V_R=25 V$ | - | - | 2.0 | μA |
| Forward Voltage | V_F | $I_F=0.1mA$ | - | - | 0.24 | V |
| | | $I_F=1.0mA$ | - | - | 0.32 | |
| | | $I_F=10mA$ | - | 0.347 | 0.40 | |
| | | $I_F=30mA$ | - | - | 0.50 | |
| | | $I_F=100mA$ | - | - | 1.00 | |
| Total Capacitance | C_T | $V_R=1V, f=1.0MHz$ | - | - | 10 | pF |


ELECTRICAL CHARACTERISTICS CURVES

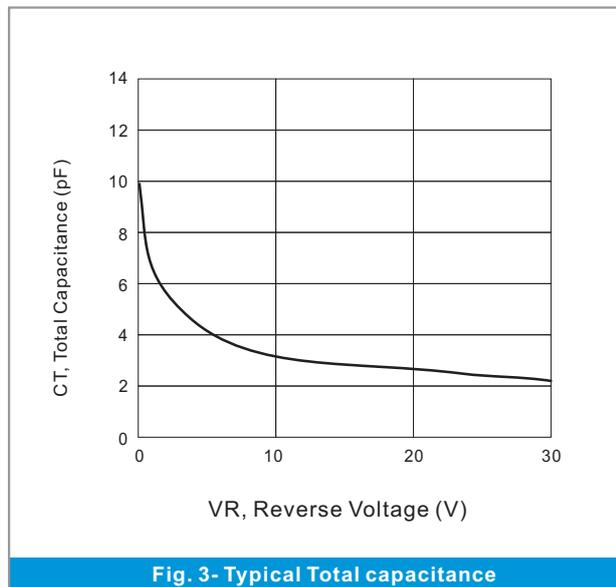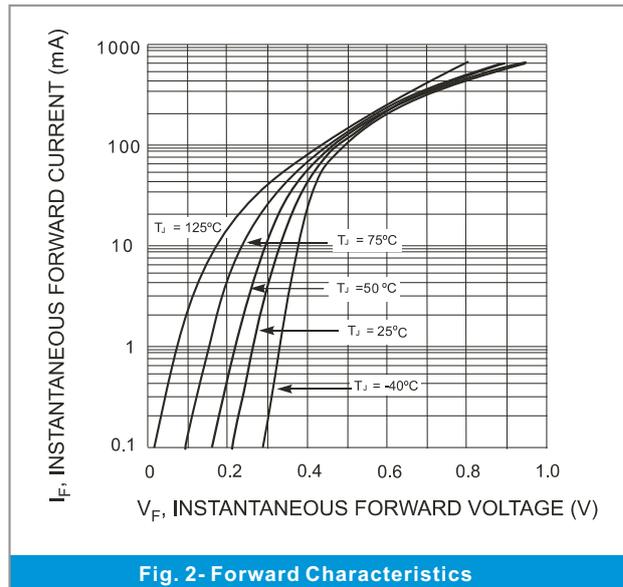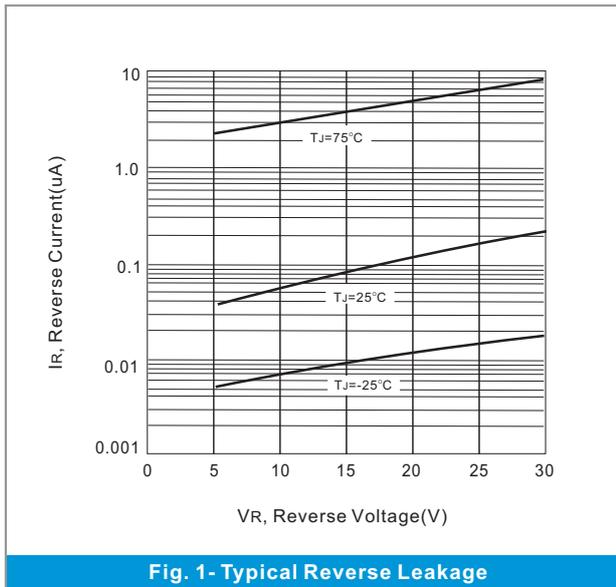



BAT54STB-TB6

MOUNTING PAD LAYOUT

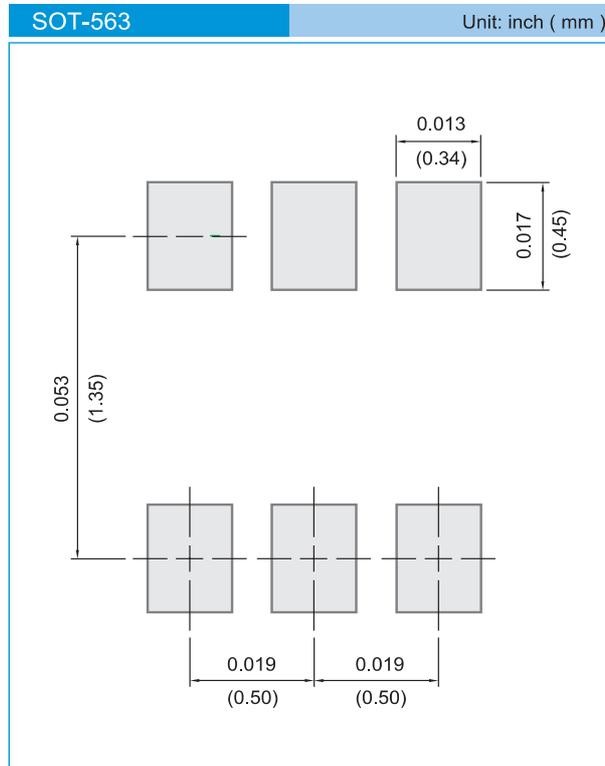

ORDER INFORMATION

- Packing information

T/R - 4K per 7" plastic Reel

T/R - 10K per 13" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.