

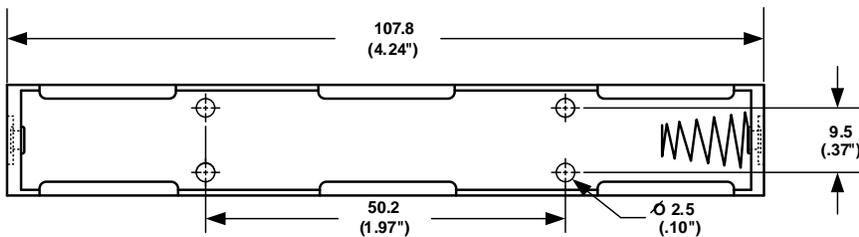


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
7/08/06	A	ADDED "ROHS COMPLIANT" UPDATED MATERIAL NOTE	T.B.	B.S.	
3/24/07	B	DIM. 107.8 WAS 107.9 DIM. 9.5 WAS 8.89 DIM. 50.2 WAS 49.5	T.B.	B.S.	



ORDERING CODE BC12AA

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	= SF
PC PINS	= PC

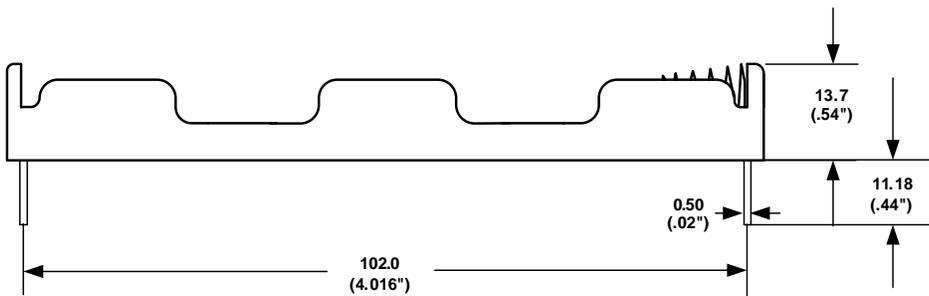

Note: Dimensions in mm. (inches)

SPECIFICATIONS :

Plastic material - polypropylene, PP-1040
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated steel spring
 Rivets - Brass, nickel plated
 P.C. Pins - Brass, nickel plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLAINT

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY B.S.
		NONE	APPROVED BY T.B.
FRACTIONAL	+ .8 (.030") - .8 (.030")	TITLE	
		TWO "AA" CELL HOLDER	
ANGULAR	+ 3° - 3°	DATE	DRAWING NUMBER
		3/24/2007	BC12AAPC