


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
11/26/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/11/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
1/12/08	D	RANGE WAS "RANGEE"	T.B.	B.S.	

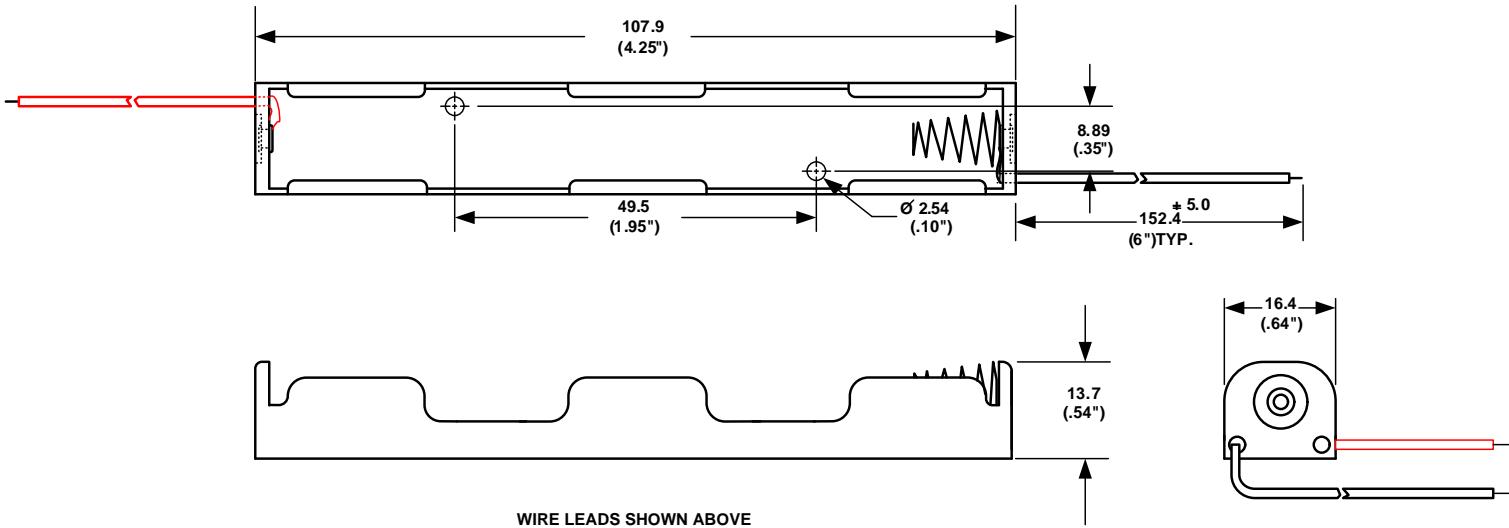

ORDERING CODE BC12AA

SPECIFICATIONS :

Plastic material - polypropylene
Flammability Rating-UL94 HB, UL File No.
E216959

Temperature Range: -10°C to +100°C
Springs - nickel plated spring steel Wire -
152.4 mm Ref. Long 26 AWG, UL1007, CSA
- TR-64, 300V, 80° C.

Rivets - Brass, nickel plated
9 Volts Snaps - Brass, nickel plated
Contact Resistance: Under 50mΩ for +/-
contacts per EIA-540J000
ROHS COMPLIANT

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	= SF

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	Memory Protection Devices, Inc.		
	200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020")		SCALE NONE	DRAWN BY S.C. APPROVED BY
FRACTIONAL + .8 (.030")	TITLE TWO "AA" CELL HOLDER		
ANGULAR + 3 °	DATE 1/12/2008	DRAWING NUMBER BC12AAW	