



BCB 97 x 94 x 32 MM SERIES

DIMENSIONS DRAWING

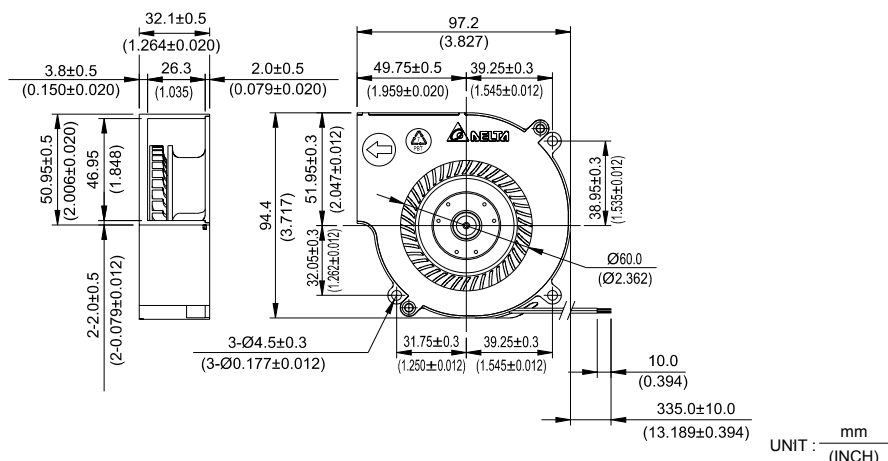

- * Bearing Type
Ball Bearings
- * Material
Impeller & Frame : Plastic (UL 94V-0)
- * Lead Wires :
UL 1007 AWG #24 OR Equivalent
Red Wire Positive(+)
Black Wire Negative(-)
- * Weight : 216g (7.62 oz)

P & Q CURVE (AT RATED VOLTAGE)

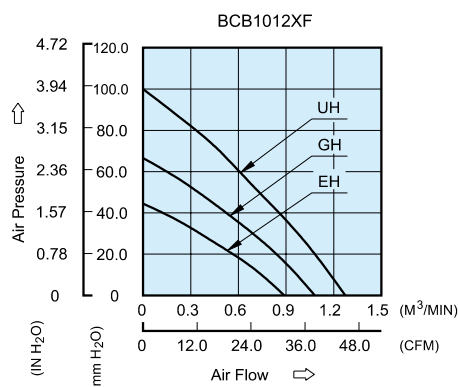

MODEL		Rated Voltage	Operating Voltage Range	Input Current	Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	dB-A
BCB1012EHF	-R00 / -F00	12	6.0 to 13.2	1.40	16.80	6700	0.889	31.39	44.43	1.749	64.0
BCB1012GHF	-R00 / -F00	12	6.0 to 13.2	2.45	29.40	8000	1.081	38.18	66.58	2.621	67.4
BCB1012UHF	-R00 / -F00	12	6.0 to 13.2	3.65	43.80	9300	1.273	44.96	100.01	3.937	69.4

- * Function type is optional.
- * The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
- * Noise is measured in anechoic chamber in free air, one meter from intake side.
- * All readings are typical values at rated voltage.
- * Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta Electronics:

[BCB1012EHF-R00](#) [BCB1012UHF](#) [BCB1012GHF](#) [BCB1012EHF](#) [BCB1012GHF-F00](#) [BCB1012UHF-R00](#)
[BCB1012EHF-F00](#) [BCB1012GHF-R00](#)