




BCX41, BSS64

NPN Silicon AF and Switching Transistors

- For general AF applications
- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: BCX42, BSS63 (PNP)

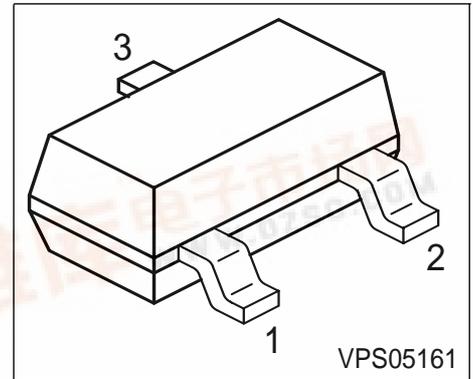

Type	Marking	Pin Configuration			Package
BCX41	EKs	1 = B	2 = E	3 = C	SOT23
BSS64	AMs	1 = B	2 = E	3 = C	SOT23

Maximum Ratings

Parameter	Symbol	BSS64	BCX41	Unit
Collector-emitter voltage	V_{CEO}	80	125	V
Collector-base voltage	V_{CBO}	120	125	
Emitter-base voltage	V_{EBO}	5	5	
DC collector current	I_C	800		mA
Peak collector current	I_{CM}	1		
Base current	I_B	100		mA
Peak base current	I_{BM}	200		
Total power dissipation, $T_S = 79\text{ °C}$	P_{tot}	330		mW
Junction temperature	T_j	150		
Storage temperature	T_{stg}	-65 ... 150		°C

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤215	K/W
--	------------	------	-----

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
DC Characteristics						
Collector-emitter breakdown voltage $I_C = 10\text{ mA}, I_B = 0$	BSS64 BCX41	$V_{(BR)CEO}$	80 125	- -	- -	V
Collector-base breakdown voltage $I_C = 100\ \mu\text{A}, I_B = 0$	BSS64 BCX41	$V_{(BR)CBO}$	120 125	- -	- -	
Emitter-base breakdown voltage $I_E = 10\ \mu\text{A}, I_C = 0$		$V_{(BR)EBO}$	5	-	-	
Collector cutoff current $V_{CB} = 80\text{ V}, I_E = 0$ $V_{CB} = 100\text{ V}, I_E = 0$	BSS64 BCX41	I_{CBO}	- -	- -	100 100	nA
Collector cutoff current $V_{CB} = 80\text{ V}, I_E = 0, T_A = 150\ ^\circ\text{C}$ $V_{CB} = 100\text{ V}, I_E = 0, T_A = 150\ ^\circ\text{C}$	BSS64 BCX41	I_{CBO}	- -	- -	20 20	μA
Emitter cutoff current $V_{EB} = 4\text{ V}, I_C = 0$		I_{EBO}	-	-	100	nA
Collector cutoff current $V_{CE} = 100\text{ V}, T_A = 85\ ^\circ\text{C}$ $V_{CE} = 100\text{ V}, T_A = 125\ ^\circ\text{C}$	BCX41 BCX41	I_{CEO}	- -	- -	10 75	μA
DC current gain 1) $I_C = 100\ \mu\text{A}, V_{CE} = 1\text{ V}$ $I_C = 1\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 4\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 10\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 20\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 100\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 200\text{ mA}, V_{CE} = 1\text{ V}$	BCX41 BSS64 BSS64 BSS64 BSS64 BCX41 BCX41	h_{FE}	25 - 20 - - 63 40	- 60 80 80 55 - -	- - - - - - -	-

 1) Pulse test: $t \leq 300\ \mu\text{s}$, $D = 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter saturation voltage ¹⁾	V_{CEsat}				V
$I_C = 300\text{ mA}$, $I_B = 30\text{ mA}$ BCX41		-	-	0.9	
$I_C = 4\text{ mA}$, $I_B = 0.4\text{ mA}$ BSS64		-	-	0.7	
$I_C = 50\text{ mA}$, $I_B = 15\text{ mA}$ BSS64		-	-	3	
Base-emitter saturation voltage 1)	V_{BEsat}	-	-	1.4	
$I_C = 300\text{ mA}$, $I_B = 30\text{ mA}$ BCX41					
AC Characteristics					
Transition frequency	f_T	-	100	-	MHz
$I_C = 20\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 20\text{ MHz}$					
Collector-base capacitance	C_{cb}	-	12	-	pF
$V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$					

Total power dissipation $P_{tot} = f(T_S)$

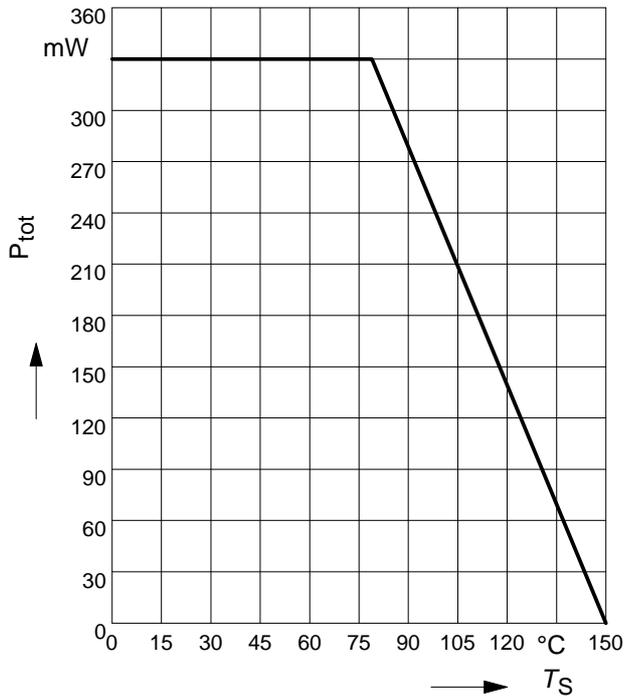


Collector current $I_C = f(V_{BE})$

$V_{CE} = 1V$

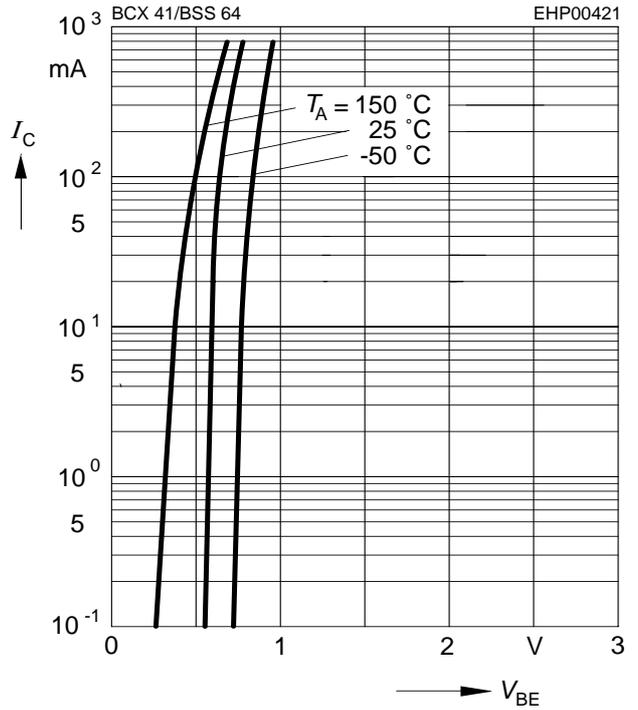


Permissible pulse load

$P_{totmax} / P_{totDC} = f(t_p)$

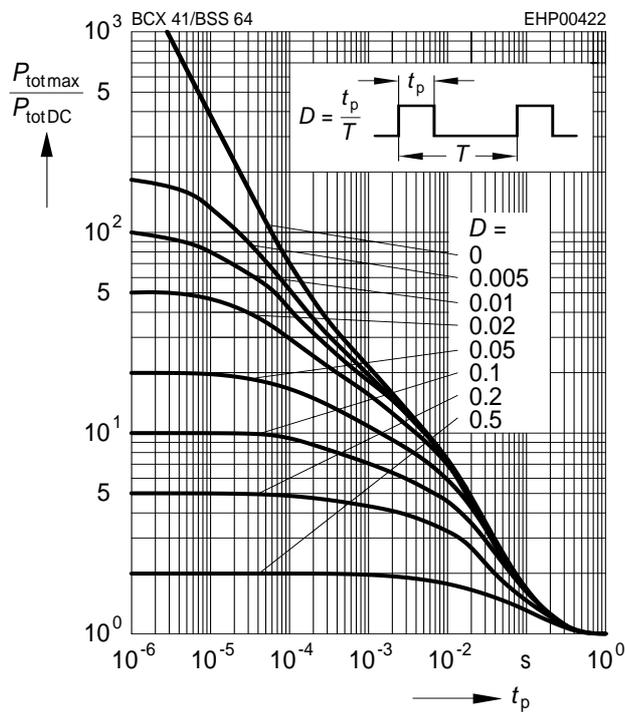


Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

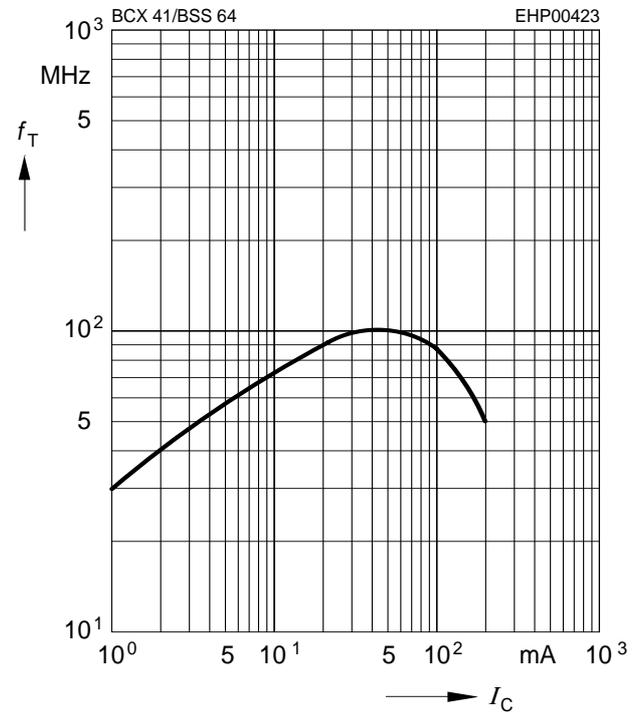


Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 10$

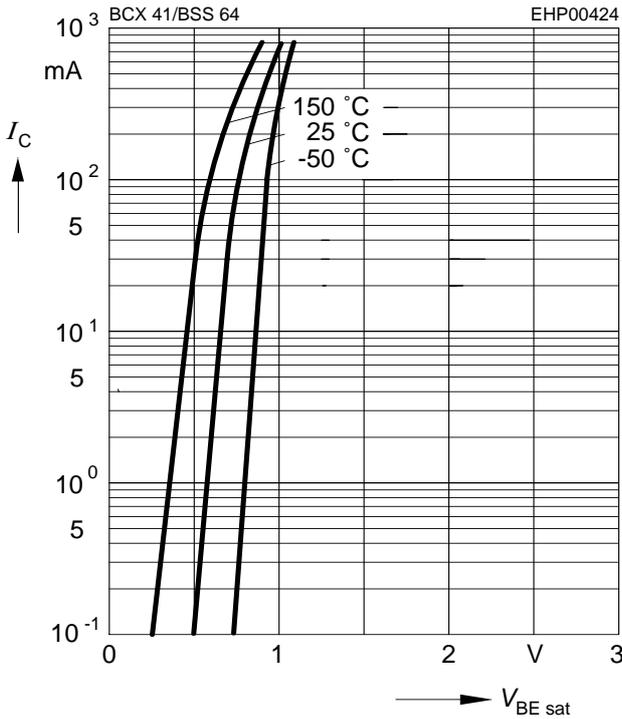


Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 10$

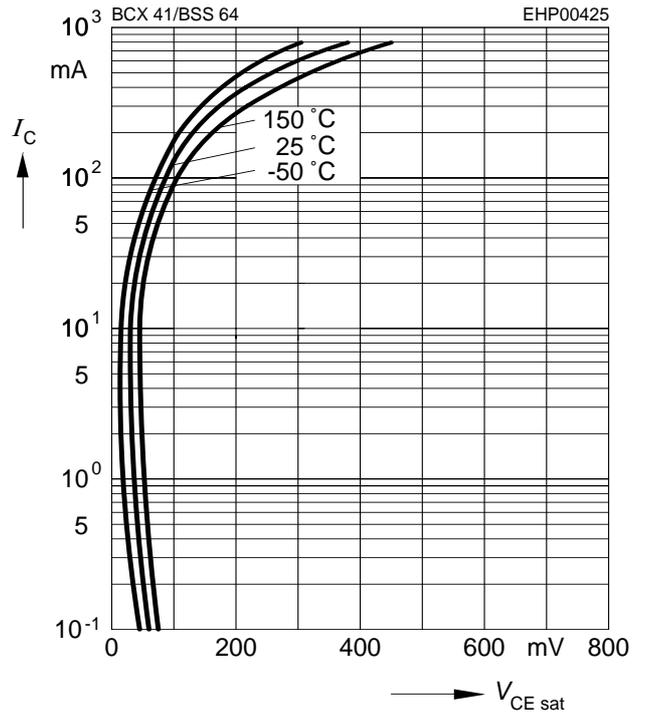

Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 80V$

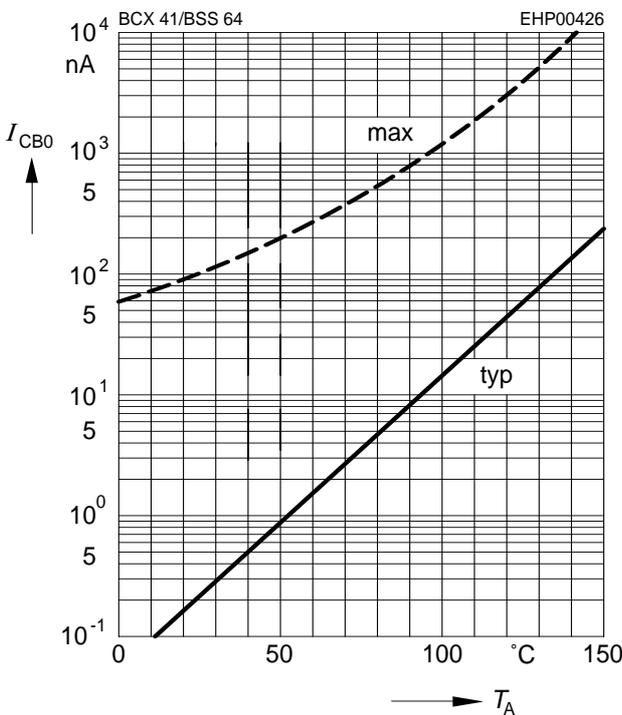

DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1V$

