


Connectors in 3.81 mm pitch

Series BC/SC 3.81

BCZ 3.81/./180

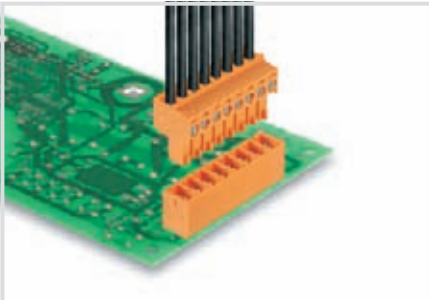

Female plug with screw connection. Wire outlet 180° (wire is straight on to the direction of plugging).

- Available in closed version, with screw flange (F) and lock and release-lever (LR).

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

Product data

IEC: 320 V / 17.5 A / 0.2 - 1.5 mm²
UL: 300 V / 10 A / AWG 28 - 16

For additional articles and information, refer to catalog.weidmueller.com


Note:

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section and min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drg. = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

BCZ 3.81/./180



Dimensioned drawing



Technical data

In compliance with IEC 60664-1 / IEC 61984			
Clamping range, max.	mm ²	0.08...1.5	
Solid core H05(07) V-U	mm²	0.2...1.5	
Stranded H07 V-R			
Flexible H05(07) V-K	mm ²	0.2...1.5	
Flexible with ferrule	mm ²	0.2...1.5	
Ferrule with plastic collar	mm ²	0.2...1.5	
Stripping length	mm	7	
Screwdriver blade	mm	0.4 x 2.5	
According to norm		DIN 5264	
Tightening torque range	Nm	0.2...0.25	
Rated current, max.	A	17.5	17
At ambient temperature		20°C	40°C
For conductor cross-section	mm ²	1	
Overvoltage category		III	III II
Pollution severity		3	2 2
Rated voltage	V	160	160 320
Rated impulse voltage	kV	2.5	2.5 2.5
UL / CUL (Use Group)		B	C D
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor	AWG	28-16	
CSA (Use Group)		B	C D
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor	AWG	28-16	
General data			
Type of insulation material		PA GF	
Flammability class UL 94		V-0	
Contact base material		Copper alloy	
Material of contact surface		tinned	
Pin dimensions = d	mm		
Solder eyelet Ø = D	mm		
Solder eyelet Ø tolerance	mm		

Accessories

Note: Refer to the Accessories chapter for additional accessories.

Hood	Order No.
BCZ 3.81 AH03	1005280000
BCZ 3.81 AH04	1005290000
BCZ 3.81 AH05	1005300000
BCZ 3.81 AH06	1005310000
BCZ 3.81 AH07	1005320000
BCZ 3.81 AH08	1005330000
BCZ 3.81 AH09	1005340000
BCZ 3.81 AH10	1005350000
BCZ 3.81 AH12	1005370000
BCZ 3.81 AH13	1005380000
BCZ 3.81 AH14	1005390000
BCZ 3.81 AH15	1005400000
BCZ 3.81 AH16	1005410000
BCZ 3.81 AH17	1005420000
BCZ 3.81 AH18	1005430000
BCZ 3.81 AH19	1005440000
BCZ 3.81 AH20	1005450000
Screwdriver	
SD 0,4x2,5x75	9009030000
SDI 0,4x2,5x75	9008370000

Ordering data

Solder pin length					
Colour		orange	black		
Pitch	3.81 mm				
Pol.	L1	(inch)	Qty.	Order No.	Order No.
2	3.81	0.150	50	1940730000	1792770000
3	7.62	0.300	50	1940740000	1792780000
4	11.43	0.450	50	1940750000	1792790000
5	15.24	0.600	50	1940760000	1792800000
6	19.05	0.750	50	1940770000	1792810000
7	22.86	0.900	50	1940780000	1871410000
8	26.67	1.050	50	1940790000	1792820000
9	30.48	1.200	50	1940800000	1871390000
10	34.29	1.350	50	1940810000	1792830000
11	38.10	1.500	50	1940820000	1899400000
12	41.91	1.650	50	1940830000	1792840000
13	45.72	1.800	50	1940840000	1899440000
14	49.53	1.950	50	1940850000	1899480000
15	53.34	2.100	50	1940860000	1899520000
16	57.15	2.250	50	1940870000	1792850000
17	60.96	2.550	50	1940890000	1940970000
18	64.77	2.550	50	1940900000	1940980000
19	68.58	2.700	50	1940910000	1940990000
20	72.39	2.850	50	1940920000	1941000000

Representative derating curve

