



BD434 – BD436 – BD438

SILICON PNP POWER TRANSISTORS.

The BD434-BD436-BD438 are PNP Transistors mounted in Jedec TO-126 plastic package. They are recommended for use in medium power linear and switching applications. NPN complements are BD433-BD435-BD437. Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	BD434	-22	V
		BD436	-32	
		BD438	-45	
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	BD434	-22	V
		BD436	-32	
		BD438	-45	
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)		-5	V
I_C	Collector Current		-4	A
I_{CM}	Collector Current Peak		-7	
I_B	Base Current		-1	A
P_C	Total power Dissipation	$T_C = 25^\circ\text{C}$	36	W
T_J	Junction Temperature		150	$^\circ\text{C}$
T_{Stg}	Storage Temperature		-65 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R_{thJ-c}	Thermal Resistance, Junction-Case	3.5	$^\circ\text{C/W}$
R_{thJ-a}	Thermal Resistance, Junction-ambient in free air	100	$^\circ\text{C/W}$

BD434 – BD436 – BD438

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit	
I_{CBO}	Collector cut-off current	$I_E = 0, V_{CB} = -22\text{ V}$	BD434	-	-	-100	μA	
		$I_E = 0, V_{CB} = -32\text{ V}$	BD436					
		$I_E = 0, V_{CB} = -45\text{ V}$	BD438					
I_{CES}	Collector cut-off current	$V_{BE} = 0, V_{CE} = -22\text{ V}$	BD434	-	-	-100		
		$V_{BE} = 0, V_{CE} = -32\text{ V}$	BD436					
		$V_{BE} = 0, V_{CE} = -45\text{ V}$	BD438					
I_{EBO}	Emitter cut-offcurrent	$I_C = 0$ $V_{EB} = -5\text{ V}$	BD434	-	-	-1	mA	
			BD436					
			BD438					
$V_{CEO(SUS)}$	Collector-Emitter sustaning Voltage (*)	$I_B = 0$ $I_C = -100\text{ mA}$	BD434	-22	-	-	V	
			BD436	-32	-	-		
			BD438	-45	-	-		
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C = -2\text{ A}$ $I_B = -200\text{ mA}$	BD434	-	-	-0.5	V	
			BD436			-0.6		
			BD438					
V_{BE}	Base-Emitter Voltage(*)	$I_C = -2\text{ A}$ $V_{CE} = -1\text{ V}$	BD434	-	-	-1.1	V	
			BD436					
			BD438			-1.2		
h_{FE}	DC Current Gain (*)	$I_C = -10\text{ mA}$ $V_{CE} = -5\text{ V}$	BD434	40	-	130	-	
			BD436					
			BD438	30	-	130		
		$I_C = -500\text{ mA}$ $V_{CE} = -1\text{ V}$	BD434	85	-	140		
			BD436					
			BD438					
		$I_C = -2\text{ A}$ $V_{CE} = -1\text{ V}$	BD434	50	-	-		
			BD436					
			BD438	40	-	-		
f_T	Transition frequency	$I_C = -250\text{ mA}$ $V_{CE} = -1\text{ V}$	BD434	3	-	-	MHz	
			BD436					
			BD438					

1. Measured under pulse conditions : $t_P < 300\mu\text{s}$, $\delta < 1.5$




BD434 – BD436 – BD438

MECHANICAL DATA CASE TO-126

	DIMENSIONS	
	min	max
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 typ.	
F	0.49	0.75
G	4.4 typ.	
L	15.7 typ.	
M	1.27 typ.	
N	3.75 typ.	
P	3.0	3.2
S	2.54 typ.	

Pin 1 :	Emitter
Pin 2 :	Collector
Pin 3 :	Base

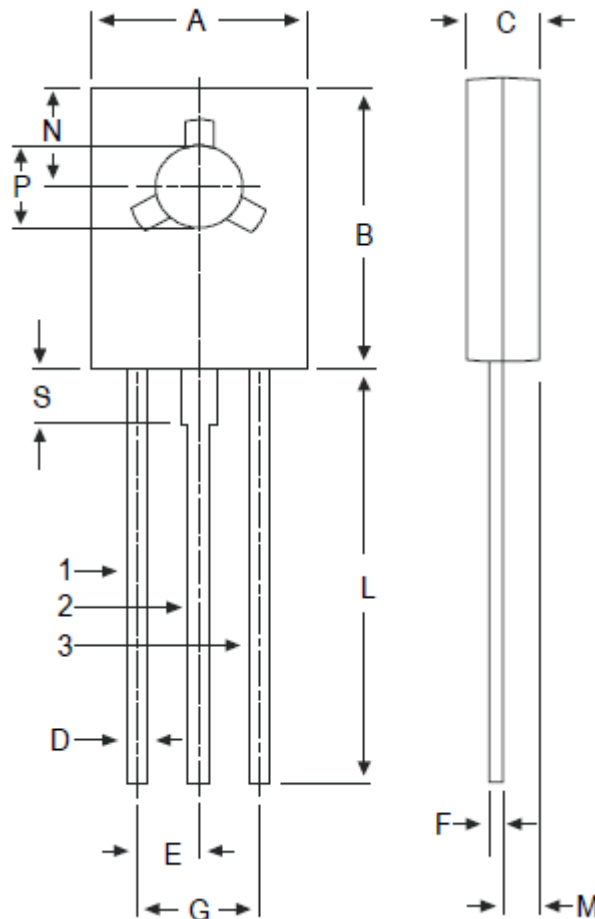

Revised August 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.