
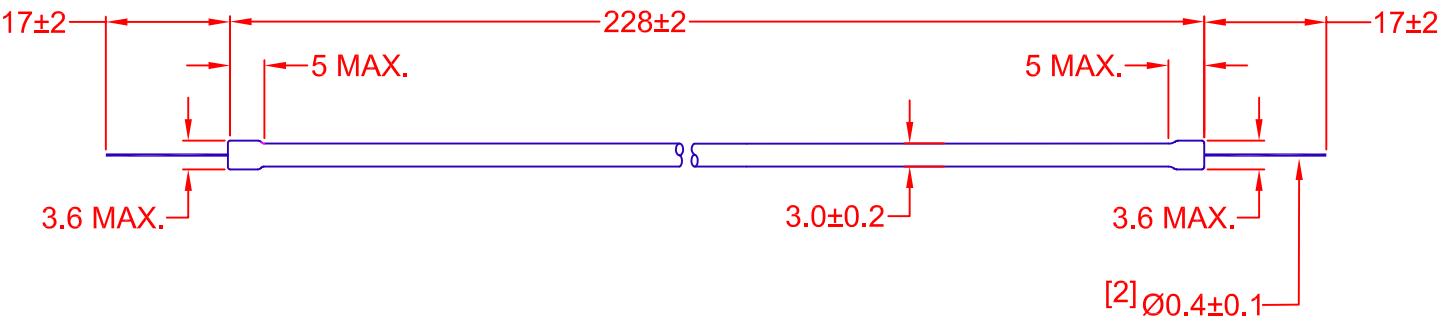




JKL LAMP PART NUMBER	COLOR LCD HIGH OUTPUT WHITE 6720°k RGB	STARTING CIRCUIT VOLTAGE VS (Vrms) @ 0°C	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) AVERAGE
BF3228-21B	x = .315 y = .295	1190	475	5 ± 1	28,000 ± 10%	40,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP				
B	ELECTRICAL RATING CHANGES	8/5/04	DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.			
A	BRIGHTNESS RATING CHANGES	8/20/97	L. WENGSTROM	J.K.	8/5/04	A	55335		BF3228-21B		
	RELEASED	12/95				SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET	
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			NONE	12/95	8/5/04	B	1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JKL Components:](#)

[BF3228-21B](#)