

## FEATURES AND BENEFITS TYPICAL APPLICATIONS

- 160V DC working voltage
- Passive balancing
- Wind pitch control
- Short-term UPS
- Renewable energy systems



## PRODUCT SPECIFICATIONS

### ELECTRICAL

### BMOD0006 E160 B02

Rated Capacitance <sup>1</sup>	5.8 F
Minimum Capacitance, initial <sup>1</sup>	5.8 F
Maximum ESR <sub>DC</sub> initial <sup>1</sup>	240 mΩ
Rated Voltage	160 V
Absolute Maximum Voltage <sup>11</sup>	170 V
Maximum Continuous Current ( $\Delta T = 15\text{ °C}$ ) <sup>2</sup>	7.0 A <sub>RMS</sub>
Maximum Continuous Current ( $\Delta T = 40\text{ °C}$ ) <sup>2</sup>	13.0 A <sub>RMS</sub>
Maximum Peak Current, 1 second (non-repetitive) <sup>3</sup>	200 A
Leakage Current, maximum (Passive Balancing) <sup>4</sup>	25 mA
Maximum Series Voltage	660 V

### TEMPERATURE

Operating Temperature (Ambient Temperature)	
Minimum	-40°C
Maximum <sup>12</sup>	65°C
Storage Temperature (Stored Uncharged)	
Minimum	-40°C
Maximum	70°C

### PHYSICAL

Mass, typical	5.1 kg
Power Terminals	M5 Thread
Recommended Torque - Terminal	4.0 Nm
Vibration Specification	IEC60068-2-6
Shock Specification	IEC60068-2-27,-29
Environmental Protection (except terminals)	IP54
Cooling	Natural Convection

## PRODUCT SPECIFICATIONS (Cont'd)

## MONITORING / CELL VOLTAGE MANAGEMENT

## BMOD0006 E160 B02

Internal Temperature Sensor	N/A
Temperature Interface	N/A
Cell Voltage Monitoring Connector	Voltage Center Tap
Cell Voltage Management	M4
	Passive

## POWER AND ENERGY

Usable Specific Power, $P_d^5$	2700 W/kg
Impedance Match Specific Power, $P_{max}^6$	5600 W/kg
Specific Energy, $E_{max}^7$	4.0 Wh/kg
Stored Energy, $E_{Stored}$	20.6 Wh

## LIFE

High Temperature <sup>12</sup> (at Rated Voltage and Maximum Operating Temperature)	1500 hours
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Room Temperature <sup>1</sup> (at Rated Voltage and 25 °C)	10 years
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Shelf Life <sup>1,10</sup> (Stored uncharged up to maximum storage temperature)	2 years

## SAFETY

Short Circuit Current, typical (Current possible with short circuit from rated voltage. Do not use as an operating current.)	730 A
High-Pot Test <sup>13</sup>	5600 V DC
Certifications	RoHS

TYPICAL CHARACTERISTICS


THERMAL CHARACTERISTICS

BMOD0006 E160 B02

Thermal Resistance ( $R_{ma}$  Module Case to Ambient), typical  
 Thermal Resistance ( $R_{ca}$  All Cell Cases to Ambient), typical  
 Thermal Capacitance ( $C_{th}$ ), typical<sup>2</sup>

N/A  
 1.1°C/W  
 4,800 J/°C

ESR AND CAPACITANCE VS TEMPERATURE

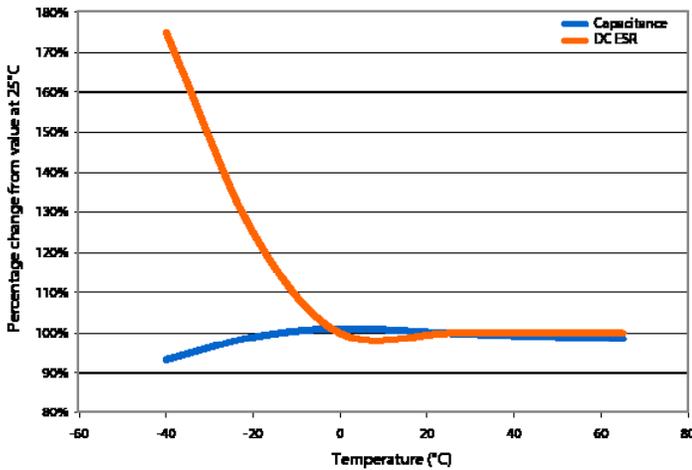

NOTES

1. Capacitance and  $ESR_{DC}$  measured at 25 °C per Document Number 1007239 available at [www.maxwell.com](http://www.maxwell.com)
2. Per Maxwell Document 1007239 available at [www.maxwell.com](http://www.maxwell.com).
3. Maximum Peak current (1 sec) =  $\frac{1/2 CV}{C \times ESR_{DC} + 1}$
4. After 72 hours at 25 °C and rated voltage. Initial leakage current can be higher.
5. Per IEC 62391-2,  $P_d = \frac{0.12V^2}{ESR_{DC} \times Mass}$
6.  $P_{max} = \frac{V^2}{4 \times ESR_{DC} \times Mass}$
7.  $E_{max} = \frac{1/2 CV^2}{3,600 \times Mass}$

8.  $E_{stored} = \frac{1/2 CV^2}{3,600}$
9. Cycle per Document Number 1007239 available at [www.maxwell.com](http://www.maxwell.com).
10. No more than 10% decrease in capacitance from minimum initial capacitance or 50% increase in ESR from maximum initial ESR.
11. Absolute maximum voltage non repeated, not to exceed 1 second.
12. For a given application, sufficient cooling must be provided to keep cell case temperatures below 65°C. See  $R_{ca}$ .
13. Duration = 60 seconds. Not intended as an operating parameter.





MOUNTING RECOMMENDATIONS

Please refer to the user manual for installation recommendations.

MARKINGS

Products are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal, warning marking, serial number.

**BMOD0006 E160 B02**

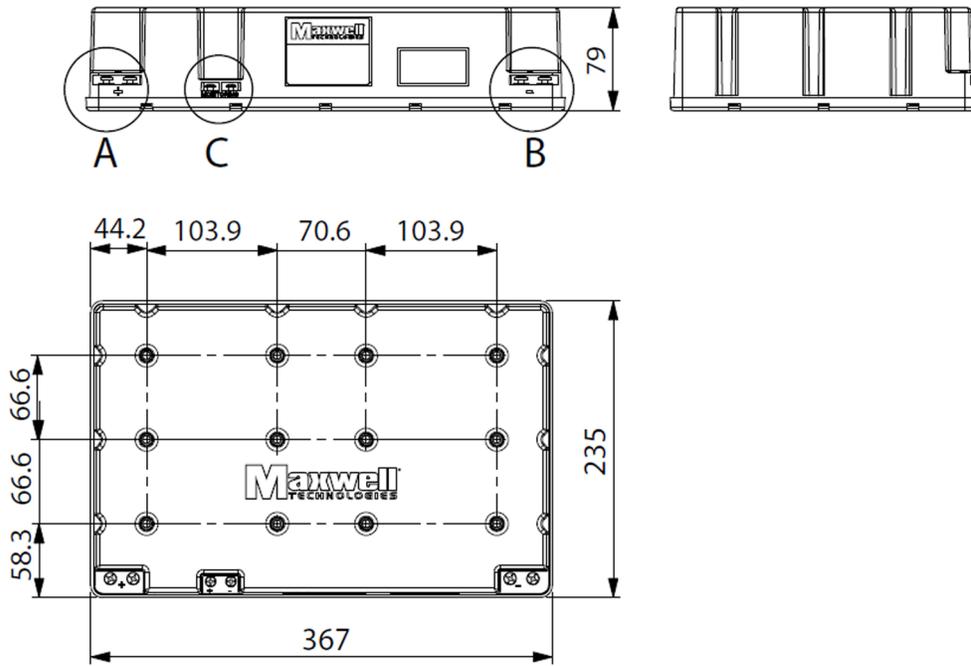

Part Description	Dimensions (mm)			Package Quantity
	L (±0.5mm)	W (±0.2mm)	H (±0.7mm)	
BMOD0006 E160 B02	367	235	79	3

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by U.S. patents and their respective foreign counterparts. Patent information can be found at [www.maxwell.com](http://www.maxwell.com).



**Maxwell Technologies, Inc.**  
**Global Headquarters**  
 5271 Viewridge Court, Suite 100  
 San Diego, CA 92123  
 USA  
 Tel: +1 858 503 3300  
 Fax: +1 858 503 3301



**Maxwell Technologies SA**  
 Route de Montena 65  
 CH-1728 Rossens  
 Switzerland  
 Tel: +41 (0)26 411 85 00  
 Fax: +41 (0)26 411 85 05



**Maxwell Technologies, GmbH**  
 Leopoldstrasse 244  
 80807 München  
 Germany  
 Tel: +49 (0)89 / 20 80 39 653  
 Fax: +49 (0)89 / 20 80 39 651



**Maxwell Technologies, Inc.**  
**Shanghai Representative Office**  
 Unit A2BC, 12th Floor  
 Huarun Times Square  
 500 Zhangyang Road, Pudong  
 Shanghai 200122, P.R. China  
 Tel: +86 21 3852 4000  
 Fax: +86 21 3852 4099

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, BOOSTCAP, C CELL, D CELL and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc. and may not be copied, imitated or used, in whole or in part, without the prior written permission from Maxwell Technologies, Inc. All contents copyright © 2012 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

