


BR-1/2AA (New)


■ Dimensions(mm)

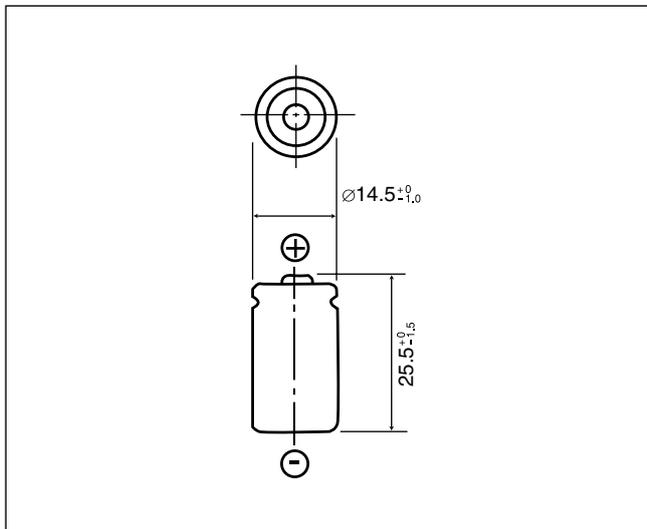

■ Specification


Nominal voltage(V)	3
Nominal capacity(mAh)	1,000
Continuous drain(mA)	2.5
Operating temperature(°C)	-40 to +100

■ Discharge temperature characteristics

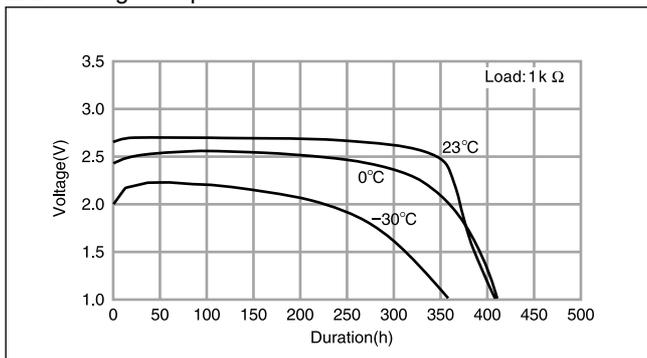

BR-2/3A


■ Dimensions(mm)

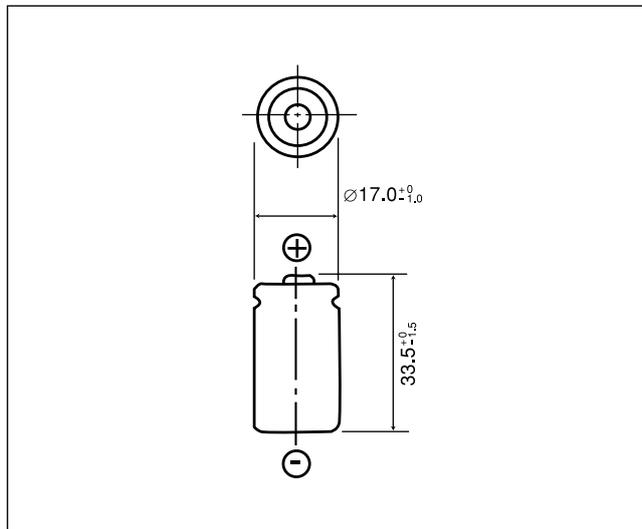


■ Specification

Nominal voltage(V)	3
Nominal capacity(mAh)	1,200
Continuous drain(mA)	2.5
Operating temperature(°C)	-40 to +85

■ Discharge temperature characteristics

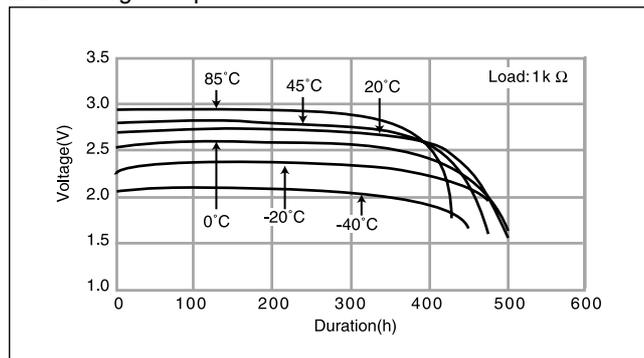

■ Operating voltage vs. Discharge current(voltage at 50% discharge depth)

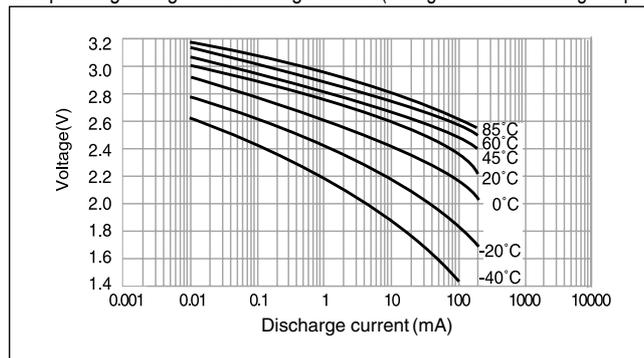

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[BR-1/2AAE5PN](#) [BR-1/2AAE2PN](#) [BR-2/3AGT](#) [BR-2/3AE2SPN](#) [BR-2/3AE5SPN](#) [BR-2/3AT2SPN](#) [BR-2/3AGE2PN](#)
[BR2/3AE2SP](#) [BR2/3ASSP](#) [BR2/3AT2SP](#)